

Door Hardware

 **Guoqiang**
ASSA ABLOY

Experience a safer
and more open world

Since 1994

ASSA ABLOY



CONTENTS

FLOOR SPRING
SERIES 01

DOOR CLOSER
SERIES 16

PULL HANDLE
SERIES 26

HANDLE SERIES 43

LOCK SERIES 70

PUSH BAR LOCK
SERIES 87

CYLINDER SERIES 89

PROFILE LOCK
SERIES 90

STAINLESS STEEL
HINGE SERIES 98

DOOR CLAMP SERIES 104


HARDWARE SERIES 111

FAUCET SHOWER
SERIES 119

FLOOR DRAIN SERIES 121

HARDWARE SERIES OF
PENDANT 125

PROJECT CASES 130

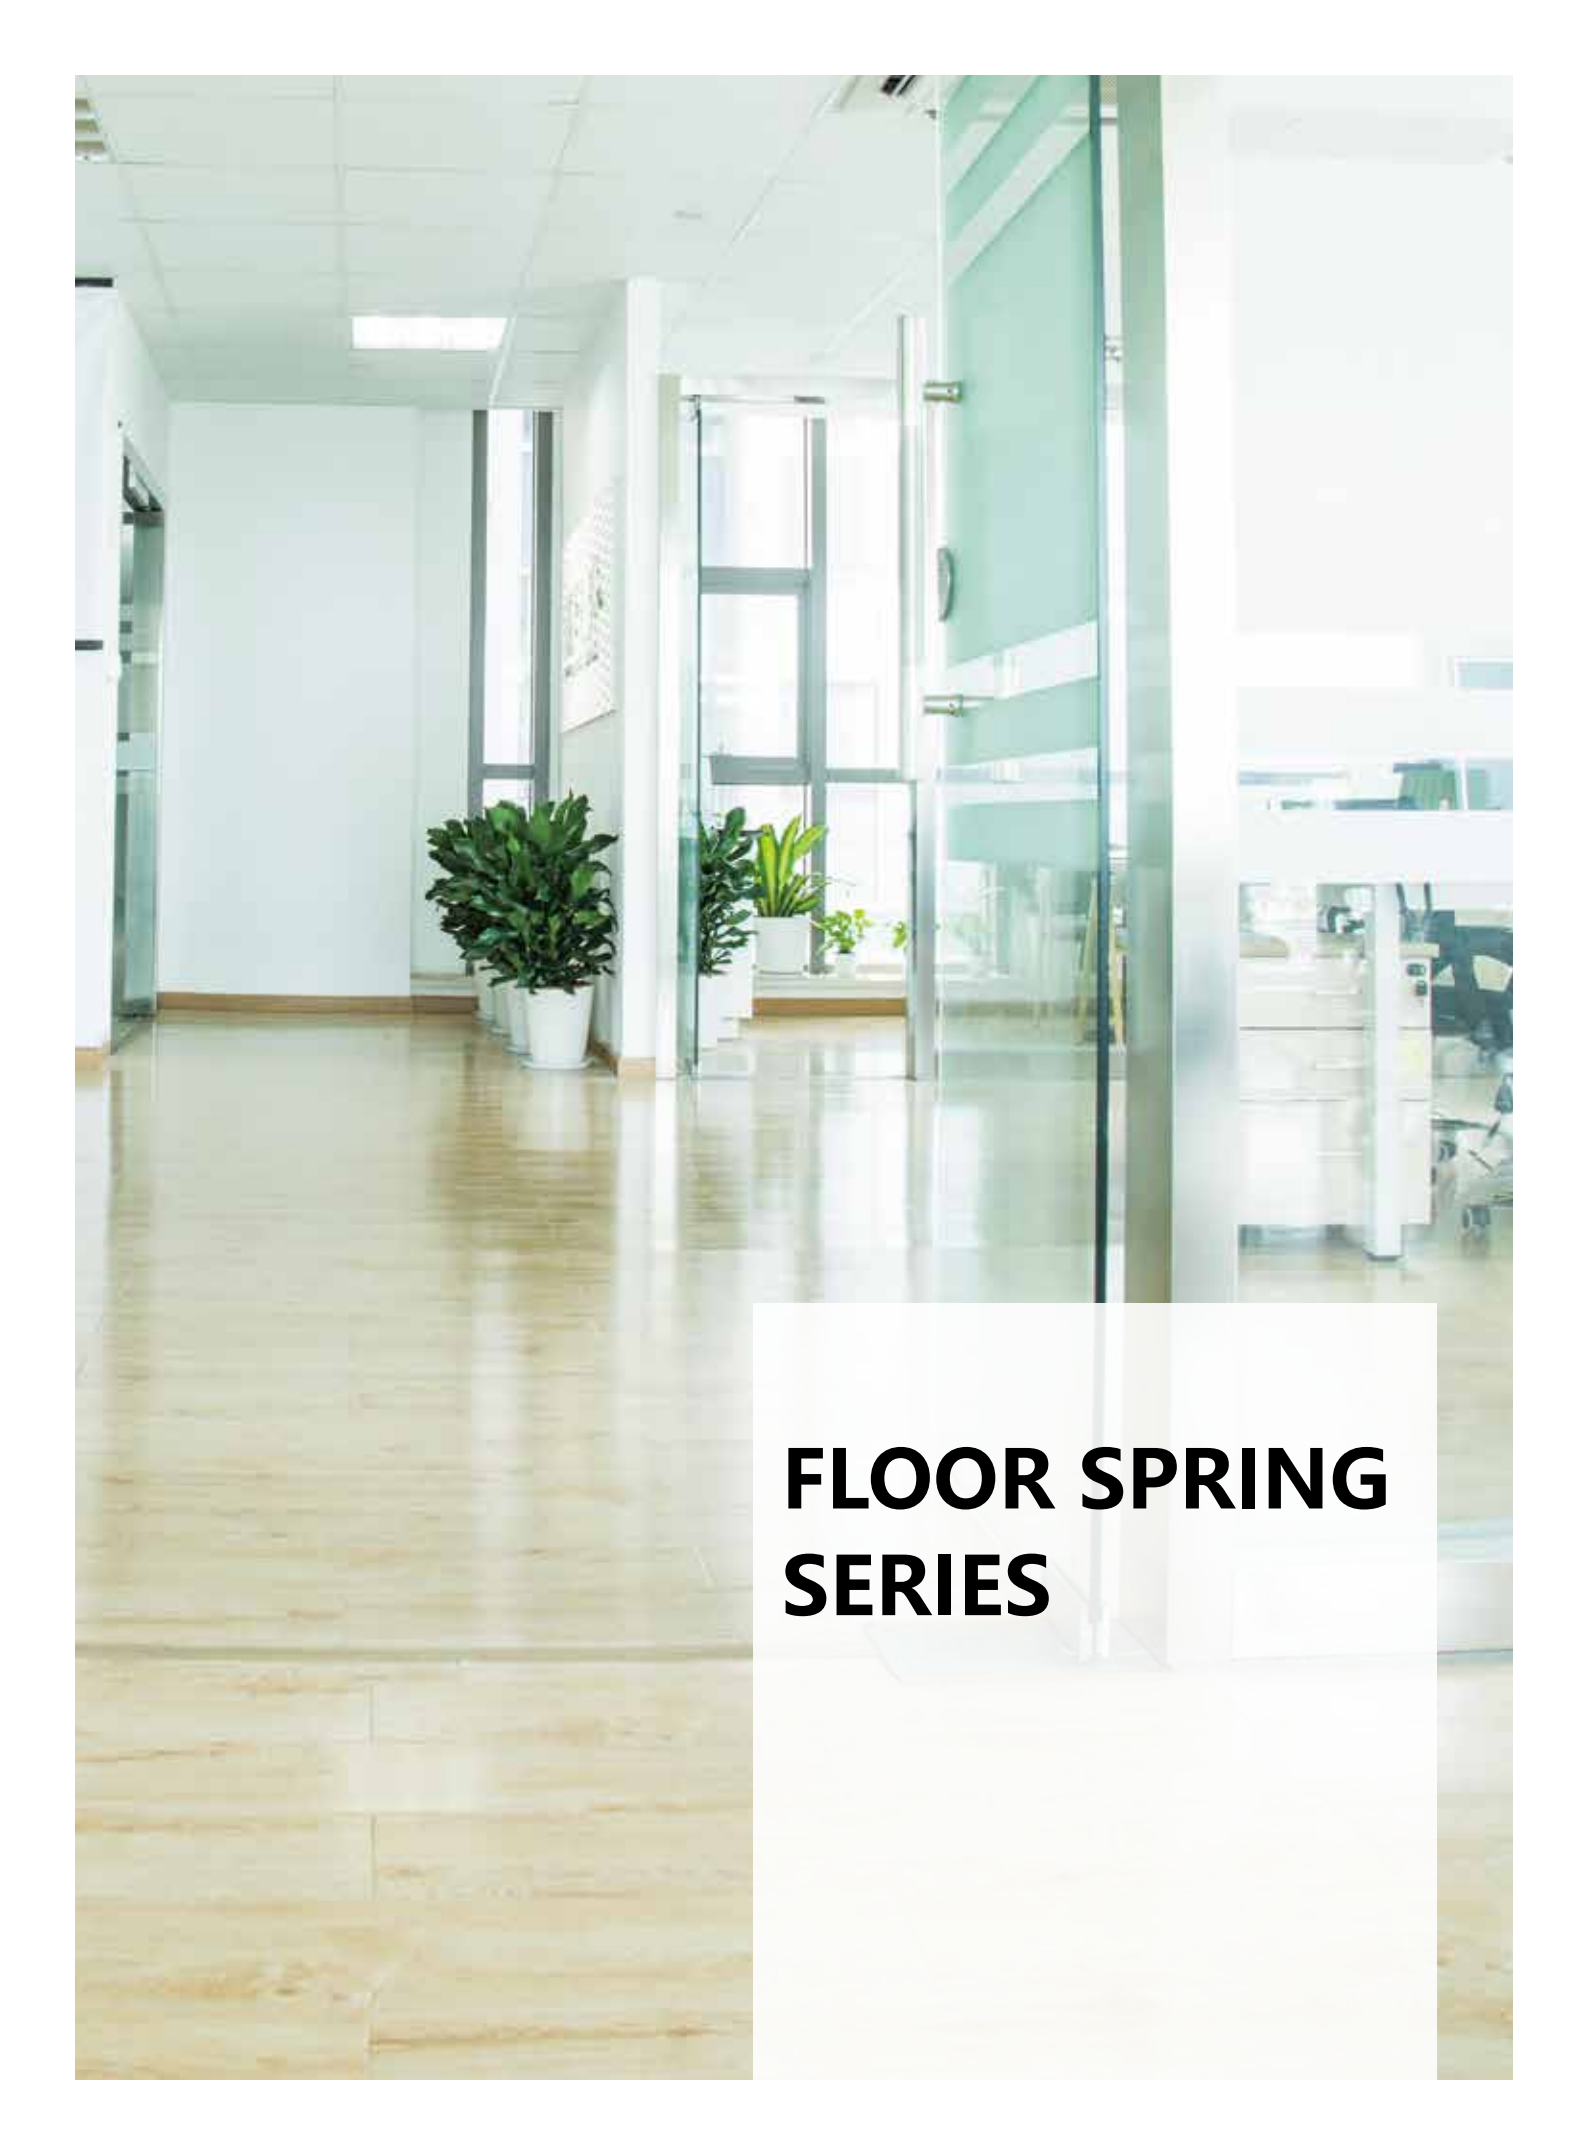A photograph of a modern office hallway. The floor is made of large, light-colored rectangular tiles that are highly reflective, showing the ceiling and the surrounding environment. The walls are white, and there are large windows on the right side, letting in natural light. Several potted plants are placed along the hallway, adding a touch of greenery. Glass partitions with metal frames are used for office cubicles. The overall atmosphere is clean, bright, and professional.

FLOOR SPRING SERIES

► Range of Application

Stainless Steel door, Aluminum alloy door, Frameless Glass door and so on.

► Product Model & Performance Features

Products pass the national QB/T 2697-2013 testing standard of Floor Hinge, the life test achieve more than 500,000 times. The products can keep a good performance under the extreme environment with the special hydraulic. The material of decoration plate is SS304, to make the products not easy deformation. It's convenient to install under the 3D adjustable function.

Model	Max.Size of door sash(W×H)(mm)	Max.loading capacity	Max.Dimension (L×W×H)(mm)	Opening degree
MD0651	800	65kg	253*102*48	105
MKDH-80	800	80kg	252*105*51	125
MD105	900	100kg	256*106*51	116
MD106	900	100kg	256*106*51	116
MKDH-120	1100	120kg	288*125*50	125
MKDH-150	1200	150kg	306*108*44	120
MKDH-180	1300	180kg	306*108*44	120
MD231	1300	230kg	310*124*58	116
MD301	1500	300kg	380*150*68.5	116

► How to select Floor Spring ?

- The selection of Floor Hinge is mainly as per the width and weight of door, then considering the specific situation of project. Improper selections will affect the using effect and serve life.
- Glass Door weight calculation, Door weight (kg)=Area(m²)×Door thickness(mm)×2.56.
- The weight of complete door =(Glass door weight + All accessories weight) × Coefficient of wind pressure
- Wind pressure: The door height less than 2400mm, coefficient considered as 1.5; The door height more than 2400mm, coefficient considered as 1.7
- It will increase the production cost of door sash and cannot achieve the ideal effect of opening if choose the heavy duty Floor Hinge for too light glass door.
- It will reduce the life of Floor Hinge, even must replace it prematurely when choose the too light duty products for saving project cost.
- Please use the Floor Hinge with antifreeze lubricant to make sure the products can work normally under the very low temperature.

MD0651




PRODUCT TECHNICAL SPEC

Model	MD0651
Standards Versions	QB/T 2697-2013
Material	Castiron
Life	> 500,000 times
Max door width(mm)	800
Max door weight(kg)	65
Non-handed version to cover complete range	YES
Hold Open	90°
Horizontal Adjustment	YES
Vertical adjustment	NO
Max.door opening angle	105°



03

TECHNICAL DIMENSIONS

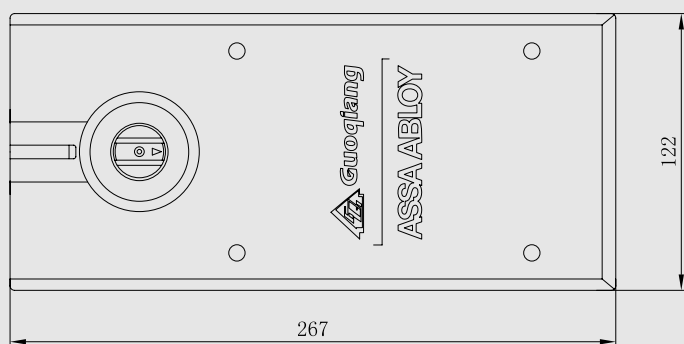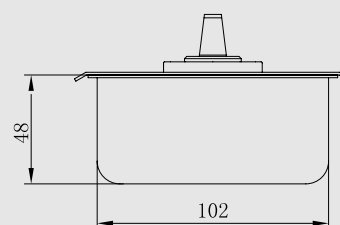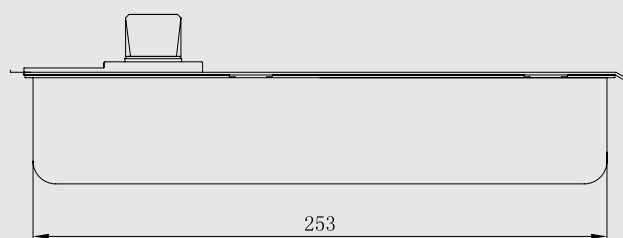

Remark: Please read the Instruction before installation.

MKDH-80




PRODUCT TECHNICAL SPEC

Model	MKDH-80
Standards Versions	QB/T 2697-2013
Material	Castiron
Life	> 500,000 times
Max door width(mm)	800
Max door weight(kg)	80
Adjustable closing speed via valve	90°-20°
Adjustable Latching speed via valve	20°-0°
Non-handed version to cover complete range	YES
Hold Open	90°
Horizontal Adjustment	YES
Vertical adjustment	NO
Max.door opening angle	125°

04

TECHNICAL DIMENSIONS

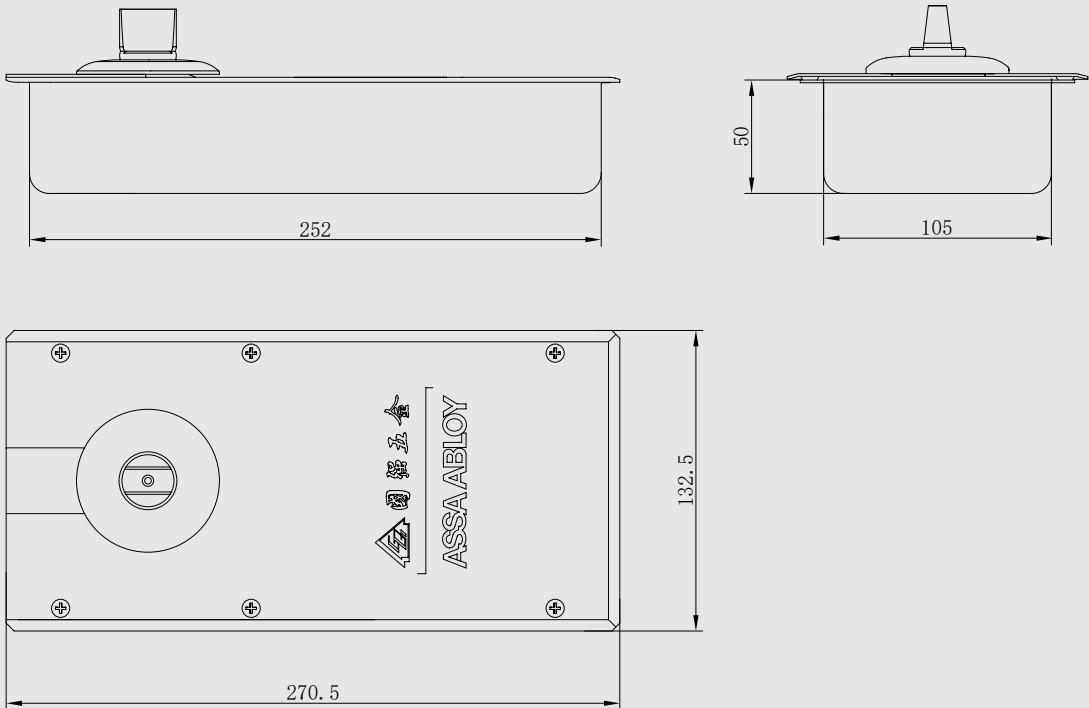

Remark: Please read the Instruction before installation.

MD105


PRODUCT TECHNICAL SPEC

Model	MD105
Standards Versions	QB/T 2697-2013
Material	Castiron
Life	> 500,000 times
Max door width(mm)	900
Max door weight(kg)	100
Adjustable closing speed via valve	90°-20°
Adjustable Latching speed via valve	20°-0°
Non-handed version to cover complete range	YES
Hold Open	90°
Horizontal Adjustment	YES
Vertical adjustment	NO
Max.door opening angle	116°



05

Technical Dimensions

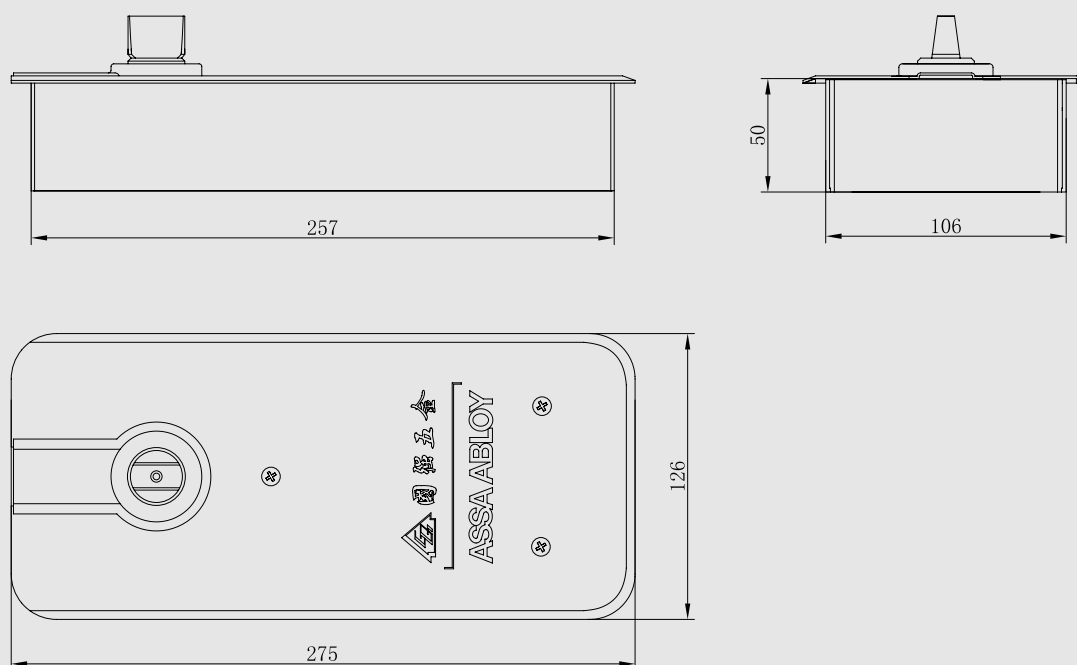

Remark: Please read the Instruction before installation.


MD106



PRODUCT TECHNICAL SPEC

Model	MD106
Standards Versions	QB/T 2697-2013
Material	Castiron
Life	> 500,000 times
Max door width(mm)	900
Max door weight(kg)	100
Adjustable closing speed via valve	90°-20°
Adjustable Latching speed via valve	20°-0°
Non-handed version to cover complete range	YES
Hold Open	90°
Horizontal Adjustment	YES
Vertical adjustment	YES
Max.door opening angle	116°

TECHNICAL DIMENSIONS

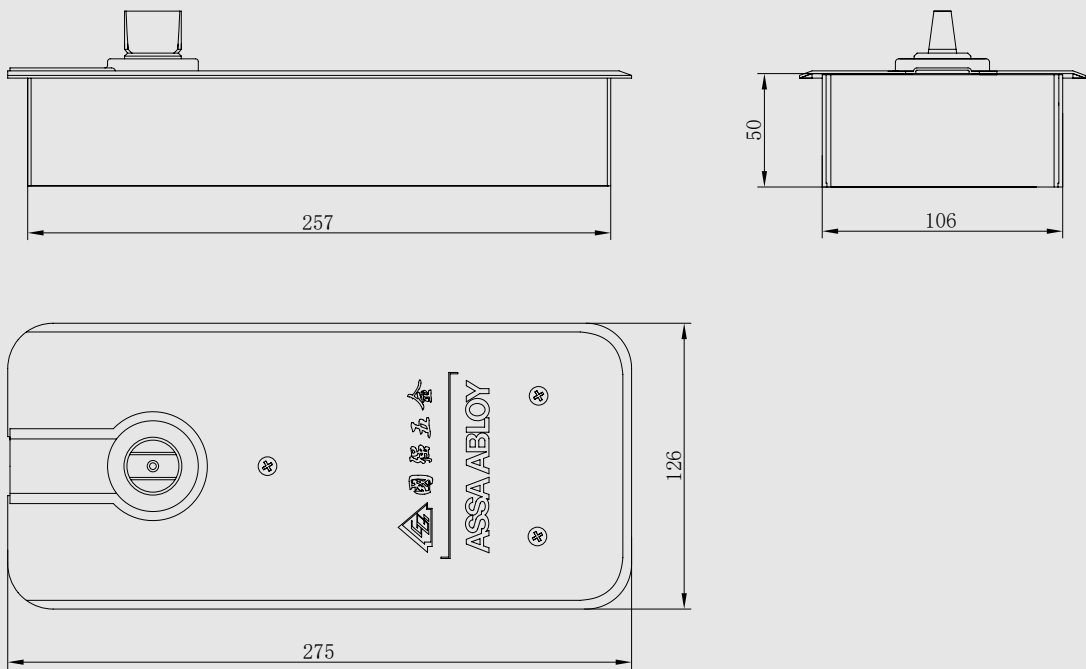

Remark: Please read the Instruction before installation.

MKDH-120


PRODUCT TECHNICAL SPEC

Model	MKDH-120
Standards Versions	QB/T 2697-2013
Material	Castiron
Life	> 500,000 times
Max door width(mm)	1100
Max door weight(kg)	120
Adjustable closing speed via valve	90°-20°
Adjustable Latching speed via valve	20°-0°
Non-handed version to cover complete range	YES
Hold Open	90°
Horizontal Adjustment	YES
Vertical adjustment	NO
Max.door opening angle	125°



07

Technical Dimensions

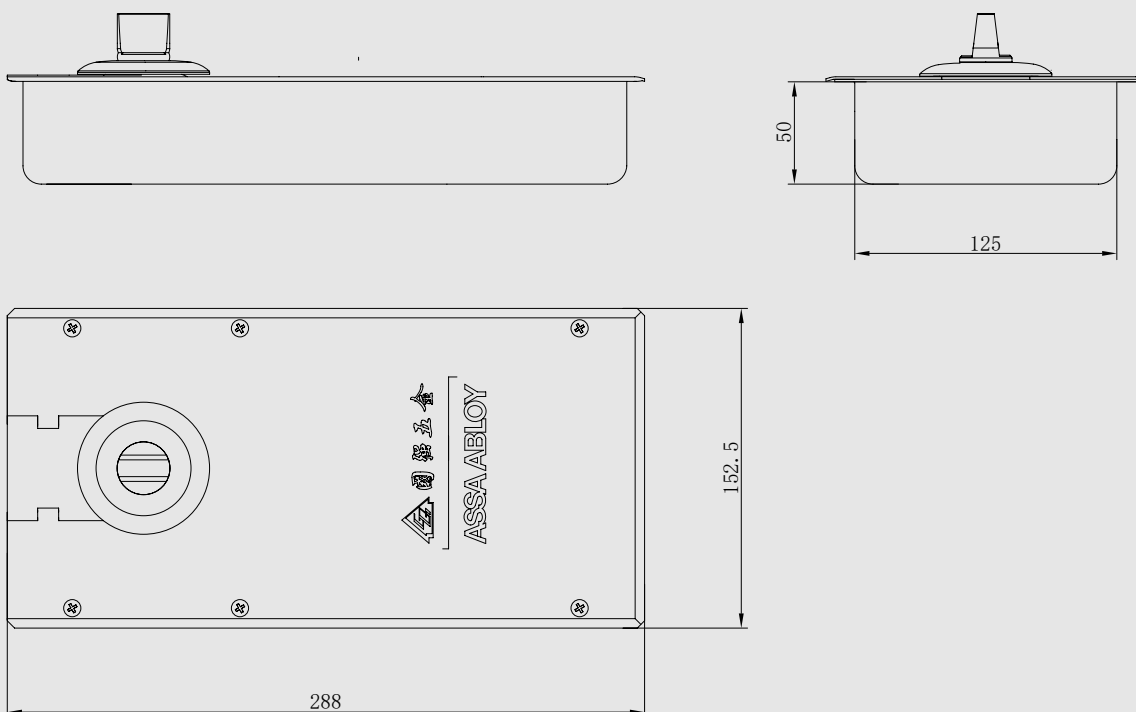

Remark: Please read the Instruction before installation.


MKDH-150



PRODUCT TECHNICAL SPEC

Model	MKDH-150
Standards Versions	QB/T 2697-2013
Material	Castiron
Life	> 500,000 times
Max door width(mm)	1200
Max door weight(kg)	150
Adjustable closing speed via valve	90°-20°
Adjustable Latching speed via valve	20°-0°
Non-handed version to cover complete range	YES
Hold Open	90°
Horizontal Adjustment	YES
Vertical adjustment	YES
Max.door opening angle	116°

TECHNICAL DIMENSIONS

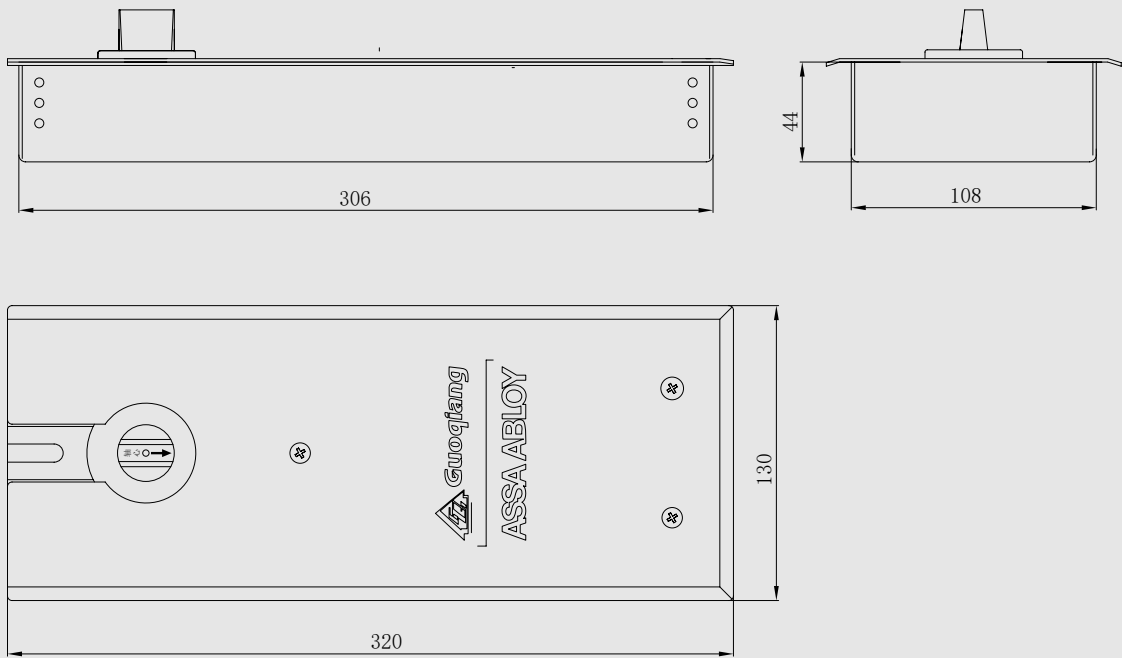

Remark: Please read the Instruction before installation.

MKDH-180


PRODUCT TECHNICAL SPEC

Model	MKDH-180
Standards Versions	QB/T 2697-2013
Material	Castiron
Life	> 500,000 times
Max door width(mm)	1300
Max door weight(kg)	180
Adjustable closing speed via valve	90°-20°
Adjustable Latching speed via valve	20°-0°
Non-handed version to cover complete range	YES
Hold Open	90°
Horizontal Adjustment	YES
Vertical adjustment	YES
Max.door opening angle	116°



09

Technical Dimensions

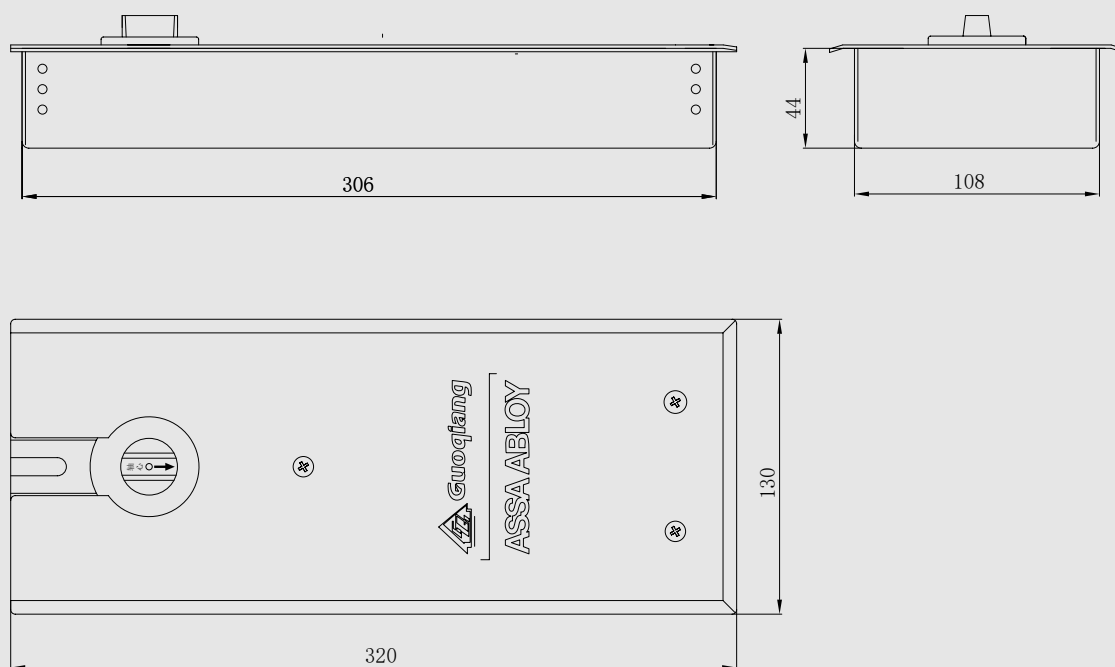

Remark: Please read the Instruction before installation.


MD231



PRODUCT TECHNICAL SPEC

Model	MD231
Standards Versions	QB/T 2697-2013
Material	Castiron
Life	> 500,000 times
Max door width(mm)	1300
Max door weight(kg)	230
Adjustable closing speed via valve	90°-20°
Adjustable Latching speed via valve	20°-0°
Non-handed version to cover complete range	YES
Hold Open	90°
Horizontal Adjustment	YES
Vertical adjustment	NO
Max.door opening angle	116 °

TECHNICAL DIMENSIONS

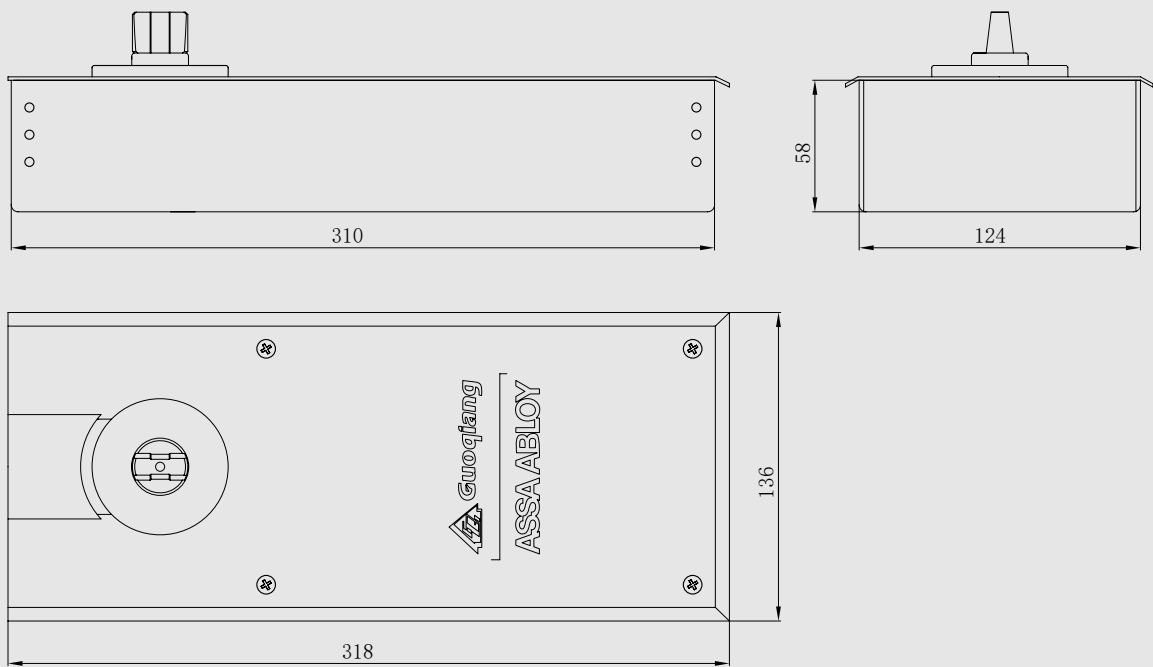

Remark: Please read the Instruction before installation.

MD301


PRODUCT TECHNICAL SPEC

Model	MD301
Standards Versions	QB/T 2697-2013
Material	Castiron
Life	> 500,000 times
Max door width(mm)	1500
Max door weight(kg)	300
Adjustable closing speed via valve	90°-20°
Adjustable Latching speed via valve	20°-0°
Non-handed version to cover complete range	YES
Hold Open	90°
Horizontal Adjustment	YES
Vertical adjustment	NO
Max.door opening angle	116°



11

Technical Dimensions

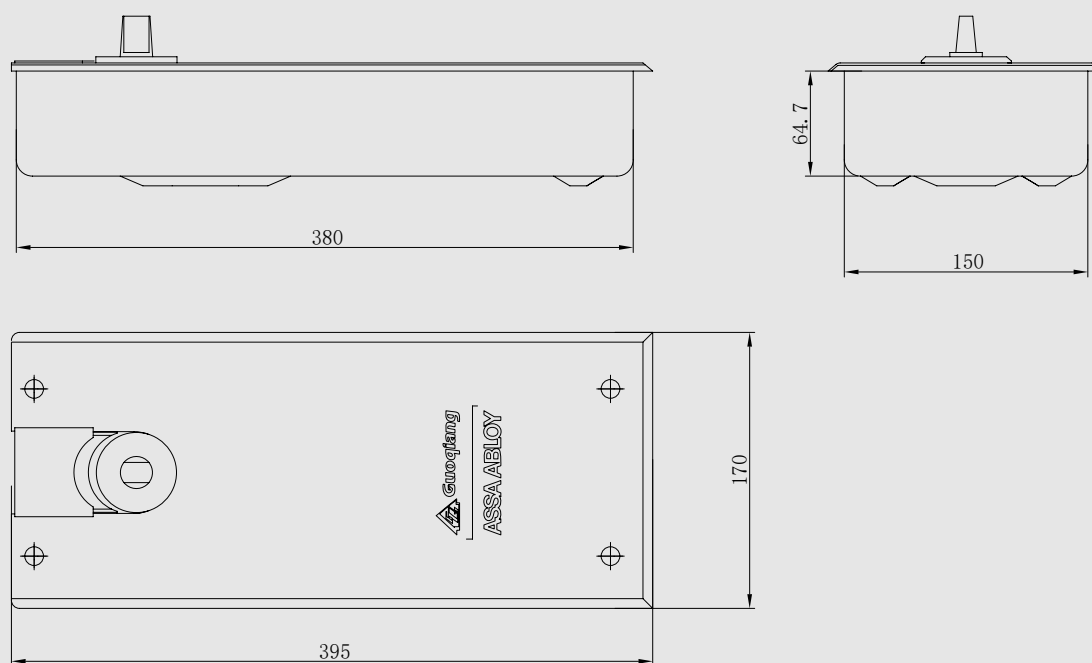


Remark: Please read the Instruction before installation.

12



Model	MKDZ-100
Standards Versions	Satin
Material	Castiron
Max door width(mm)	900
Door Weight(kg)	100
Max Opening Angle	170°
Life	>500,000 times

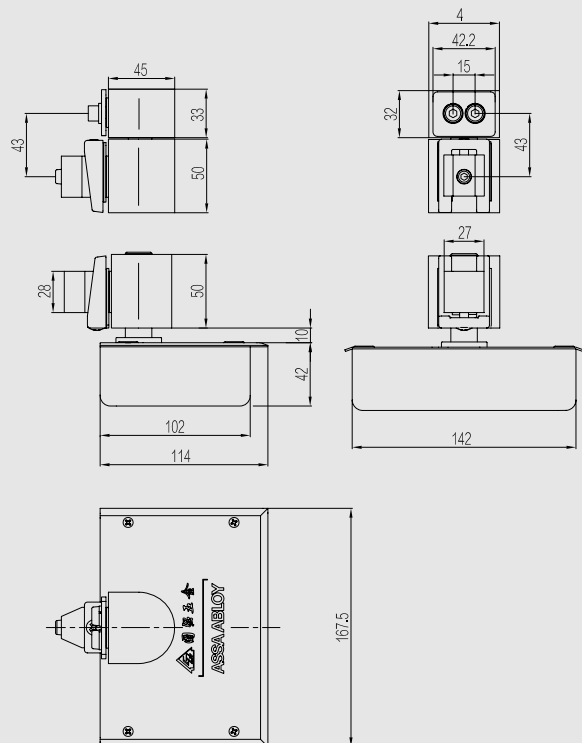

Remark: Please read the Instruction before installation.


MKDZ-120

PRODUCT TECHNICAL SPEC

Model	MKDZ-120
Standards Versions	Satin
Material	Castiron
Max door width(mm)	1200
Door Weight(kg)	120
Max Opening Angle	170°
Life	> 500,000 times




13

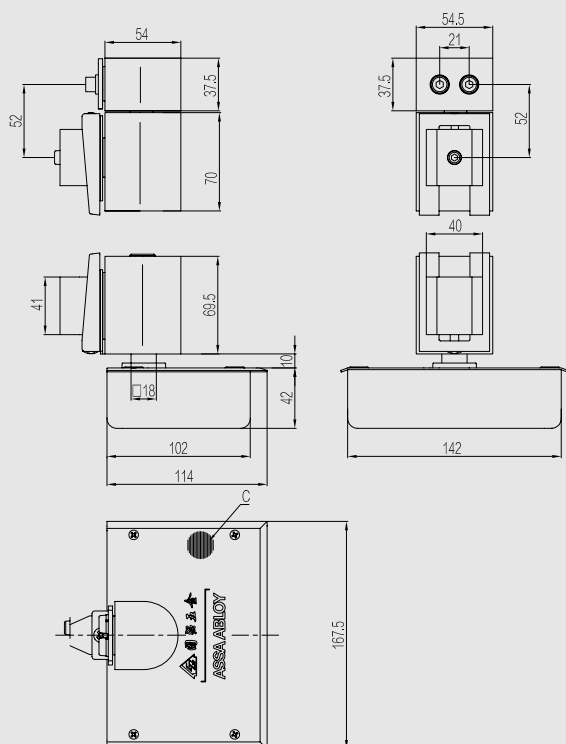


Remark: Please read the Instruction before installation.

Simple apical axis | MD033

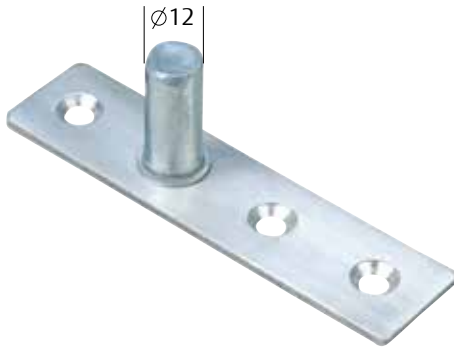


Simple apical axis | MD034

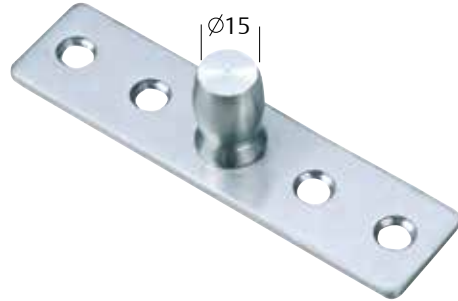

Pivot base seat | MD021




Top pivot base seat | MD031

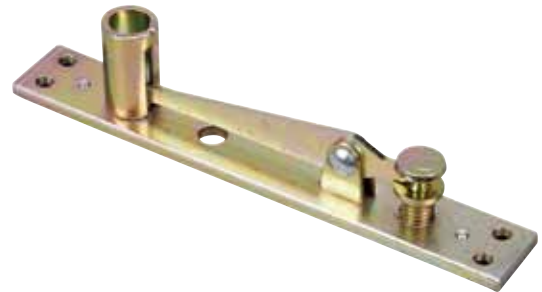

Center rocker arm | MD011



Center rocker arm | MD012

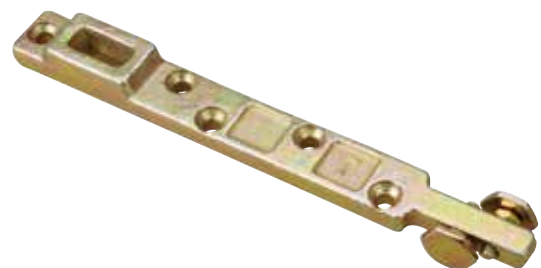

Simple apical axis | MD036



Rocker arm | MD011.1



Pivot base seat | MD021.1



Top pivot base seat | MD031.1




MD051L/R



MKDZ-200



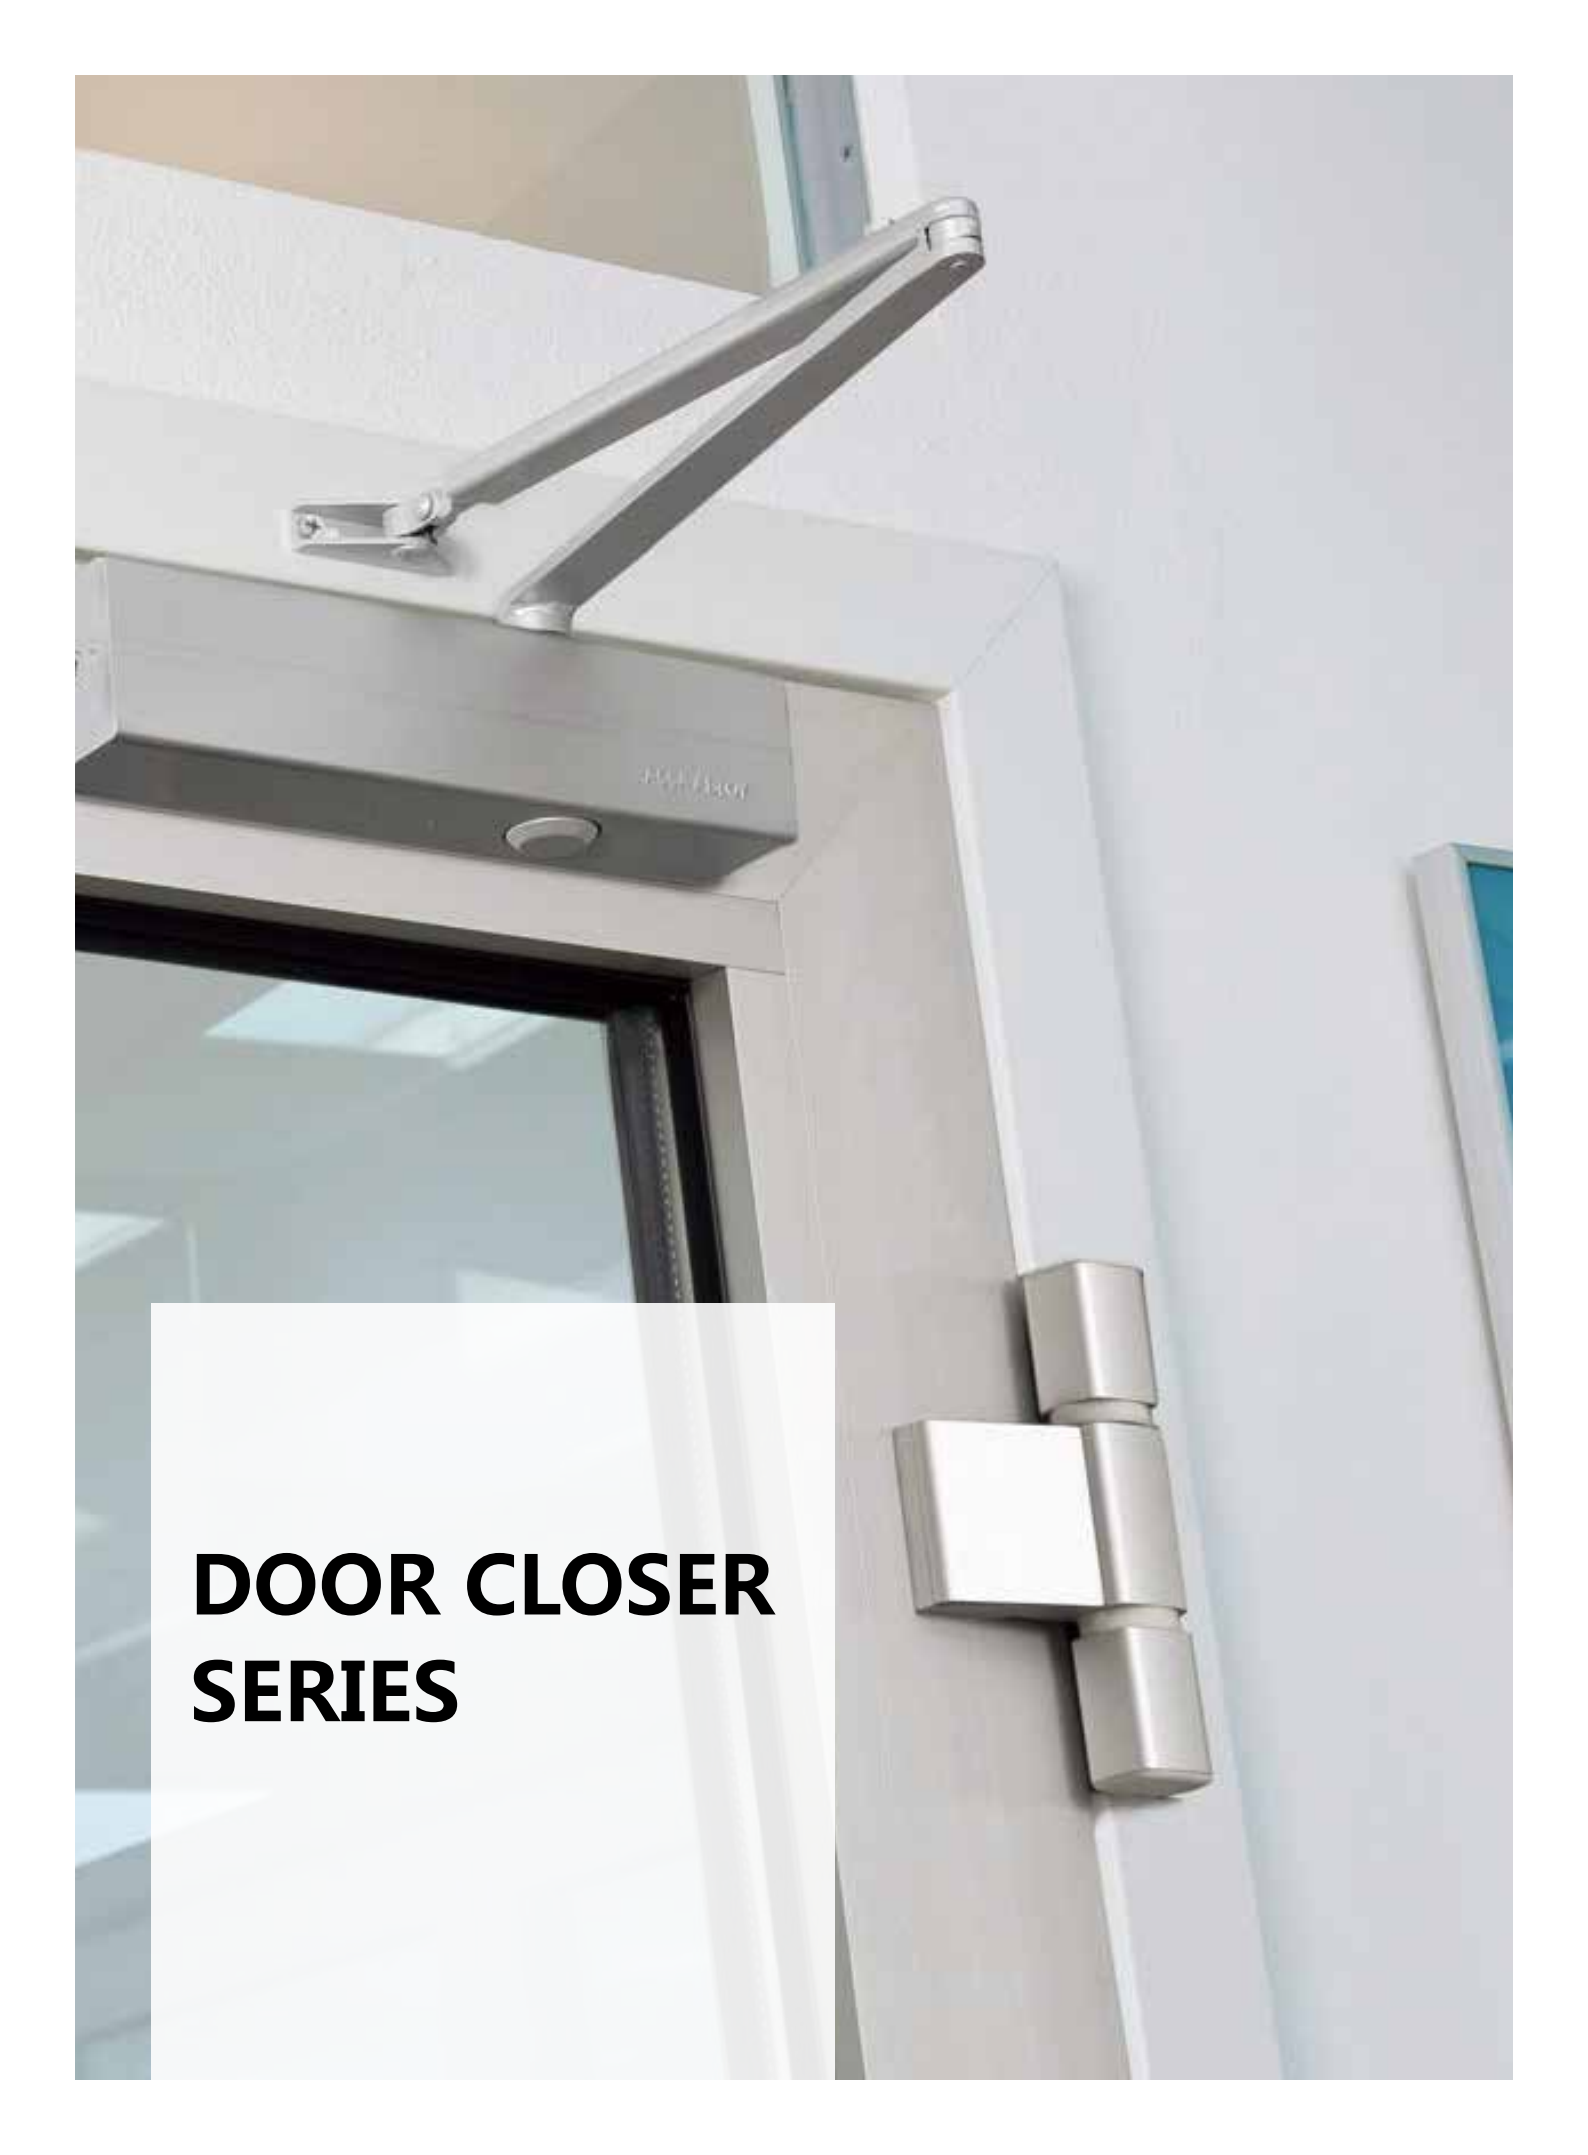

DOOR CLOSER SERIES

Door Closer Application Form

Item	Item Code	Hold Position	Force Number	Door Weight/kg	Max door sash width/mm	Door type	Picture
Window closer	FBC201	NA	2#	25 ~ 45	800	Fire window	
Door Closer	FB201	NA	2#	25 ~ 45	700	Fire Door	
	FB203	NA	2#				
Door Closer	FB301	NA	3#	40 ~ 65	800		
Door Closer	QB301	NA	3#	40 ~ 65	800	All kinds of casement door	
	QB301D	Hold Position	3#				
Door Closer	QB401	NA	4#	60 ~ 85	1000		
	QB401D	Hold Position	4#				
Door Closer	QB501	NA	5#	80 ~ 120	1200		
	QB501D	Hold Position	5#				
Invisible Door Closer	QB305	NA	3#	40 ~ 65	950		
	QB305D	Sliding track arm	3#				

DOOR CLOSER



PRODUCT FEATURES

- Material: High-strength die-cast aluminum alloy
- Life: >500.000times
- Standards Versions: GA93-2004
- Max opening angle: 180°
- Speed Governing Control: Two Stage Adjustable Speed
- Locate Function: Optional
- The standard color : Silvery




Optional parallel bracket

PRODUCT CATEGORIES

Model		parameter			Dimension					
Non-hold Open	90°Hold Open	Max door weight(Kg)	Max door width(mm)	Spring Power	A	B	C	D	E	F
FB201	---	25-45	700	Fixed Silvery 2	148	132	19	36	39	157-225
FB301	---	40-65	800	Fixed Silvery 3	178	162	19	36	39	175-255.5

The dimension for reference only

TECHNICAL DIMENSIONS

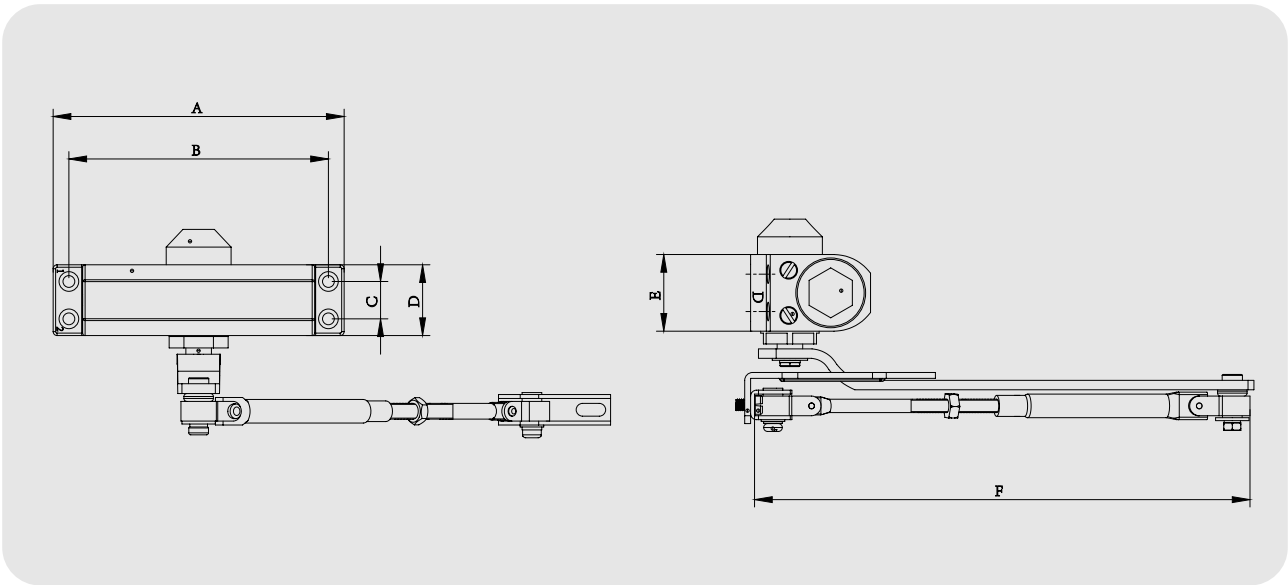

DOOR CLOSER



PRODUCT FEATURES

- Material: High-strength die-cast aluminum alloy
- Life: >500.000times
- Standards Versions: QB/T 2698-2013
- Max opening angle: 180°
- Speed Governing Control: Two Stage Adjustable Speed
- Locate Function: Optional
- The standard color : Silvery




Optional parallel bracket

PRODUCT CATEGORIES

Model		parameter			Dimension					
Non-hold Open	90°Hold Open	Max door weight(Kg)	Max door width(mm)	Spring Power	A	B	C	D	E	F
QB301	QB301D	40-65	800	Fixed Silvery 3	178	162	19	36	39	175-255.5

The dimension for referance only

TECHNICAL DIMENSIONS

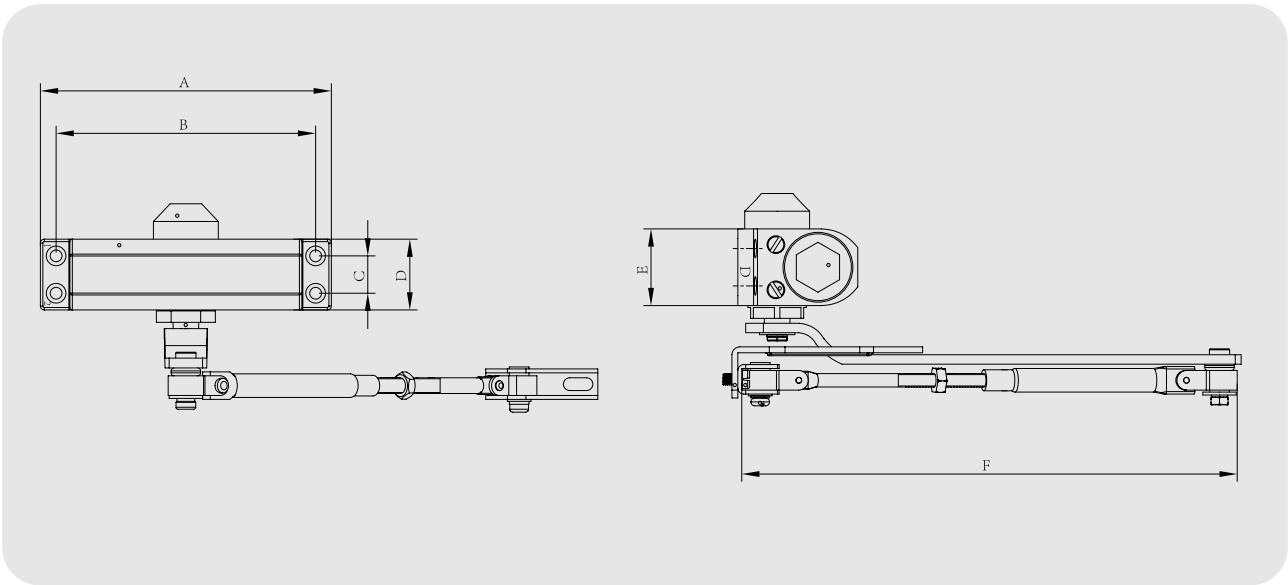

DOOR CLOSER



PRODUCT FEATURES

- Material: High-strength die-cast aluminum alloy
- Life: >500.000times
- Standards Versions: QB/T 2698-2013
- Max opening angle:180°
- Speed Governing Control: Two Stage Adjustable Speed
- Locate Function: Optional
- The standard color : Silvery




Optional parallel bracket

PRODUCT CATEGORIES


Model		parameter			Dimension						
Non-hold Open	90°Hold Open	Max door weight(Kg)	Max door width(mm)	Spring Power	A	B	C	D	E	F	G
QB401	QB401D	60-85	1000	Fixed Silvery 4	205	187	19	43	39	44	220~325
QB501	QB501D	85-120	1200	Fixed Silvery 5	225	208	19	43	39	44	220~325

The dimension for reference only

TECHNICAL DIMENSIONS

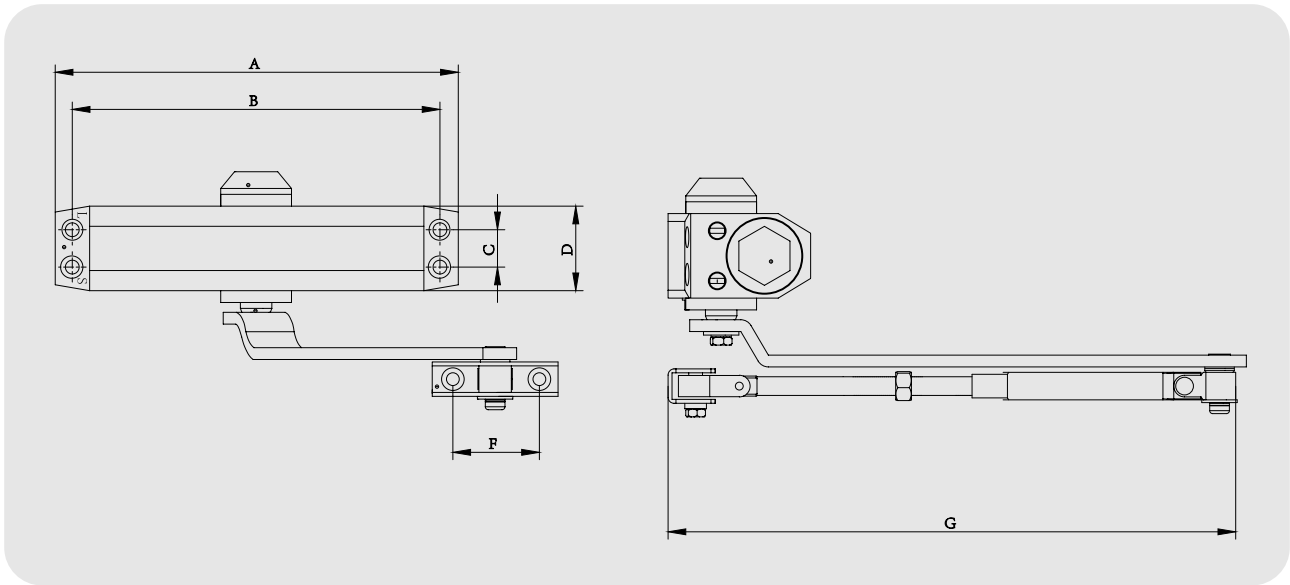

Hidden Door Closer

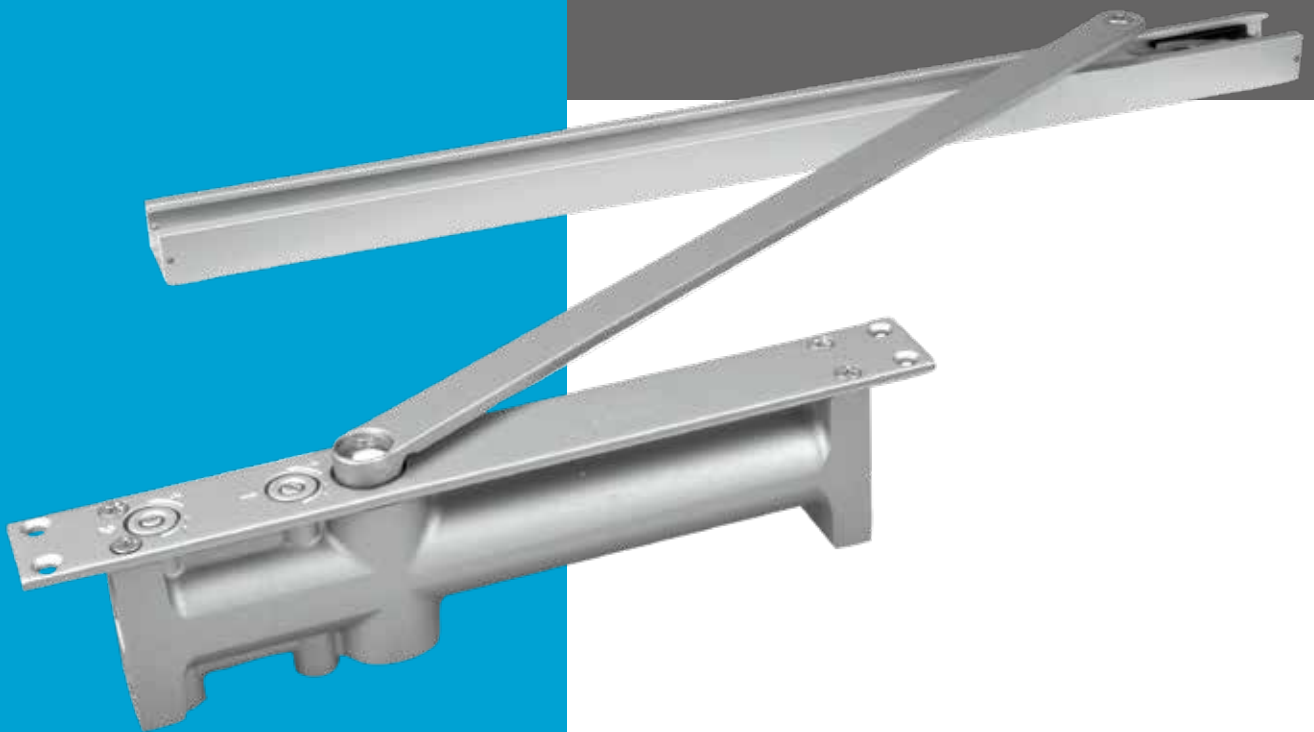

PRODUCT FEATURES

Material: High-strength die-cast aluminum alloy

Life: >500.000times

Standards Versions: QB/T 2698-2013

Max opening angle: 180°

Speed Governing Control: Two Stage Adjustable Speed

Locate Function: Optional


The standard color: Silvery

PRODUCT CATEGORIES

Model		parameter		
Non-hold Open	90°Hold Open	Max door weight(Kg)	Max door width(mm)	Spring Power
QB305	QB305D	40-65	950	Fixed Silvery 3

The dimension for reference only

TECHNICAL DIMENSIONS

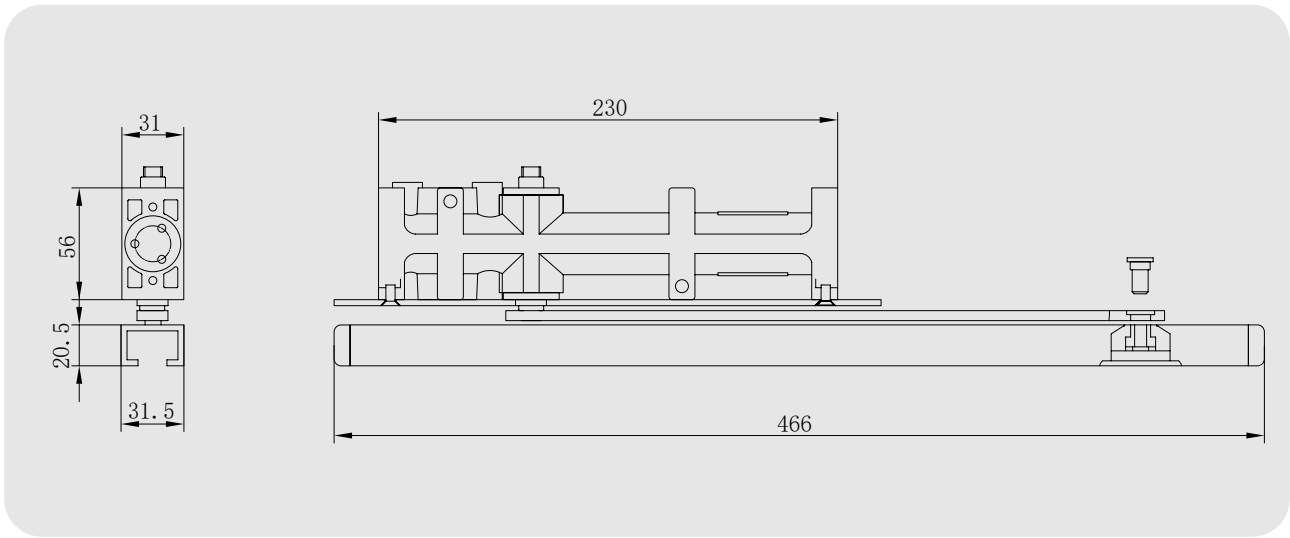





PULL HANDLE SERIES

Stainless Steel Pull Handle

Series



PRODUCT FEATURES

Finsh: Satin & Mirror

Features: Elgant and practical

Available: Glass door, Wooden and metal door

Handle specification(mm): A is the total length;
B is the center distance; C is the caliber

Can be customized



Material and specification

Material: stainless steel

Thickness: $\geq 1.0\text{mm}$

Size: $\phi 38$ 、 $\phi 32$ 、 $\phi 25$ 、 25×38

Accessories

The subsidiary accessory is selected Stainless Steel Philips countersunk screw (M8 $\times$ 29) and Countersunk raised head screws with cross recess (M8 $\times$ 29), POM washer ($\phi 38 \times 5$), pad ($\phi 38 \times 5$), brass adaptor.


Maintaining

Advised use special cleanser or water with soft cloth and dry up in soft towel atleast once a week.



Avoid use corrosivity cleaner.

Avoid use knife tools to scratch the surface of the handle.

Double door handles installation

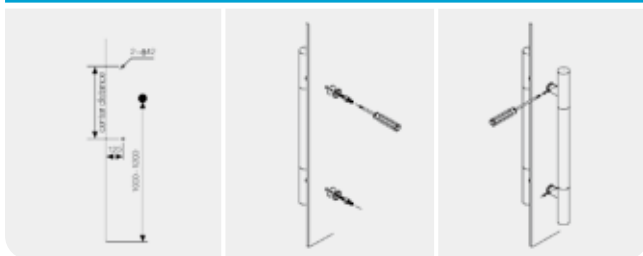

Single door handles installation

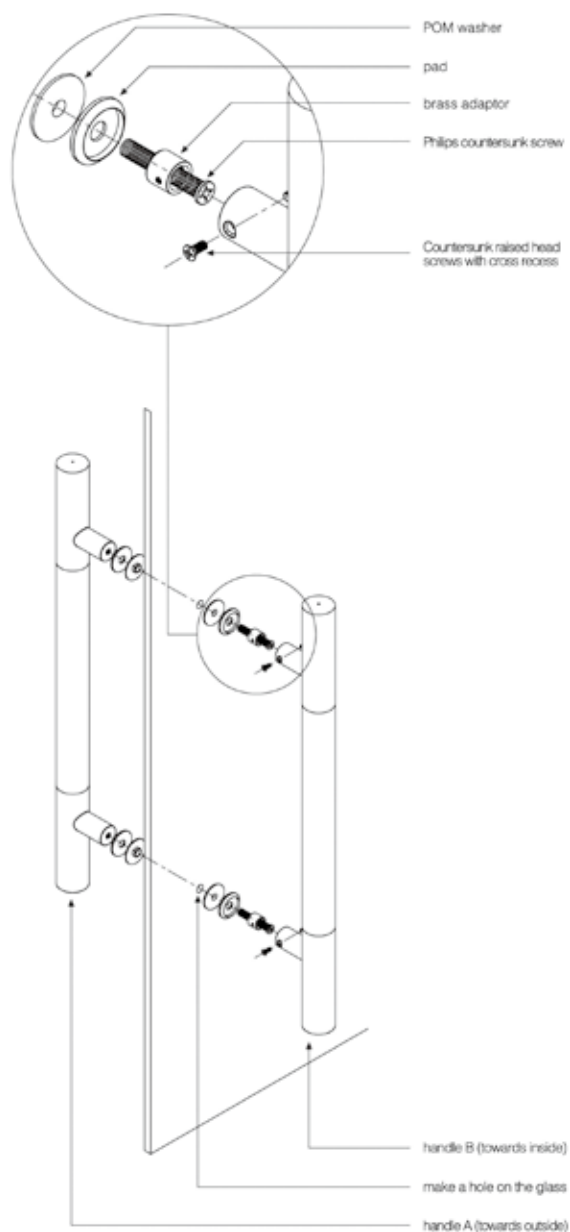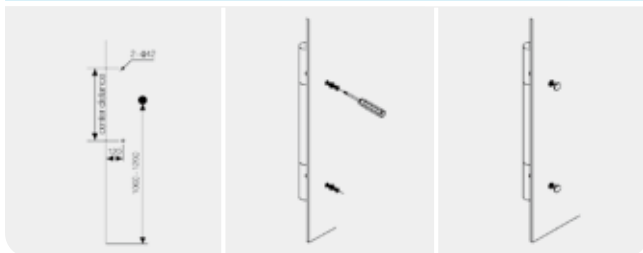




MLY3050

- **Material:** Stainless Steel 304
- **Finishing:** Satin
- **Applicable Door Thickness:** 10-65mm


Code	A、A1(mm)	B、B1(mm)	C(mm)
MLY3050	300、500	275、475	25

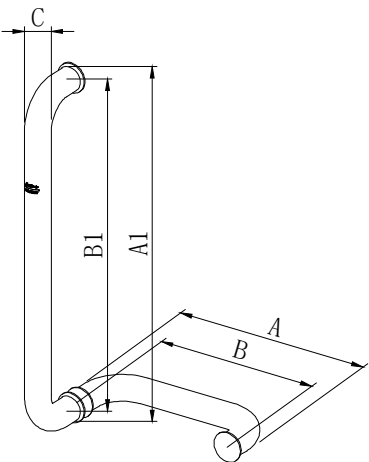

ML61

- **Material:** Stainless Steel 304
- **Finishing:** Satin
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML6108	800	750	32
ML6110	1000	950	38
ML6112	1200	1150	38
ML6118	1800	1750	38

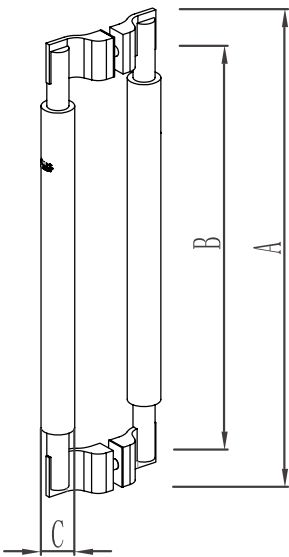




ML62

- **Material:** Stainless Steel 304
- **Finishing:** Satin & Mirror
- **Applicable Door Thickness:** 10–65mm

Code	A(mm)	B(mm)	C(mm)
ML6206	600	400	32
ML6208	800	500	38
ML6210	1000	700	38
ML6212	1200	800	38
ML6215	1500	1100	38
ML6218	1800	1300	38
ML6220	2000	1500	38

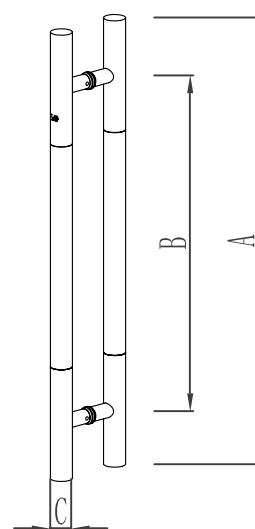


31




ML63

- **Material:** Stainless Steel 304
- **Finishing:** Satin & Mirror
- **Applicable Door Thickness:** 10–65mm

Code	A(mm)	B(mm)	C(mm)
ML6303	305	280	25
ML6304	450	418	32
ML6306	600	562	38


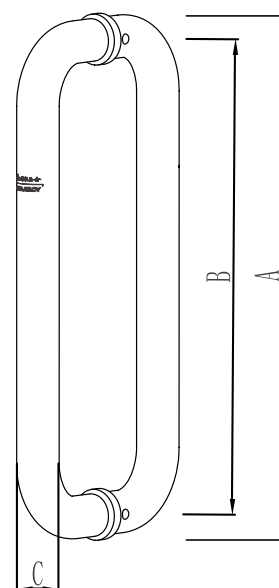


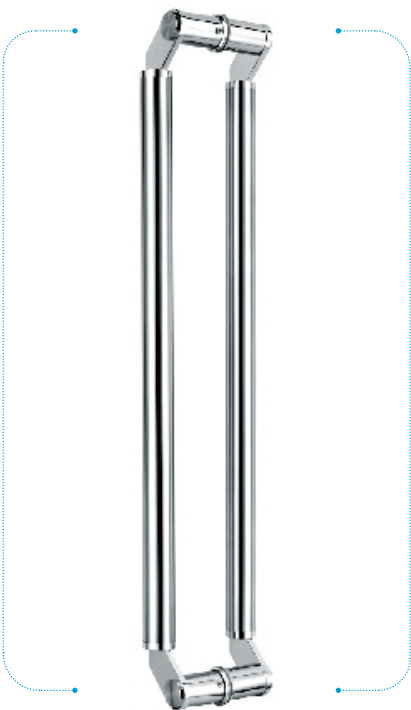

ML64

- **Material:** Stainless Steel 304
- **Finishing:** Satin & Mirror
- **Applicable Door Thickness:** 10-65mm


Code	A(mm)	B(mm)	C(mm)
ML6406	600	568	32
ML6408	800	762	38
ML6412	1200	1162	38

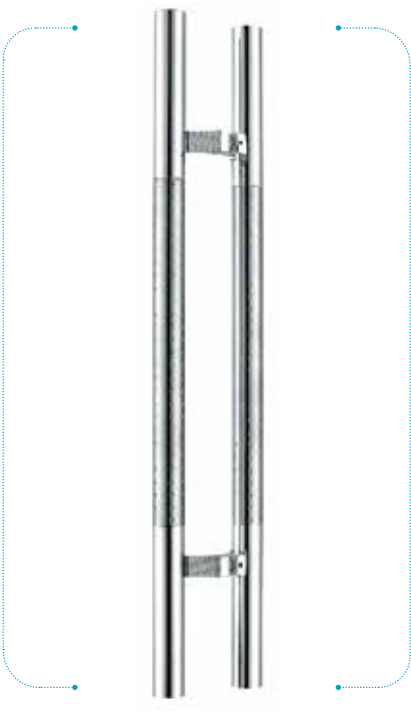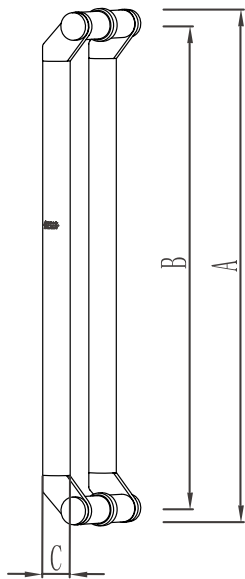

ML65

- **Material:** Stainless Steel 304
- **Finishing:** Satin & Mirror
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML6506	600	400	32
ML6508	800	500	38
ML6512	1200	800	38

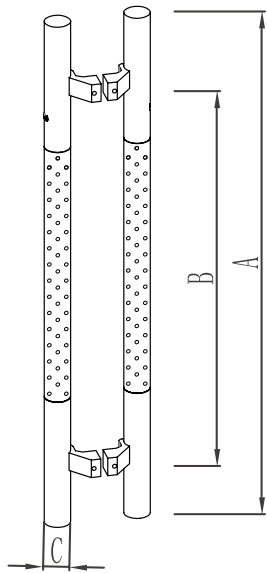




ML65X

- **Material:** Stainless Steel 304
- **Finishing:** Satin & Mirror
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML6506X	600	400	32
ML6508X	800	500	38
ML6512X	1200	800	38

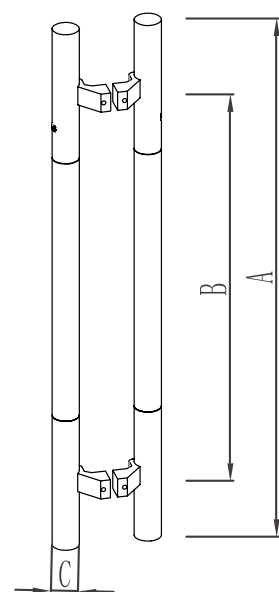


33




ML67

- **Material:** Stainless Steel 304
- **Finishing:** Satin
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML6704	400	375	25
ML6705	500	462	38
ML6706	600	562	38


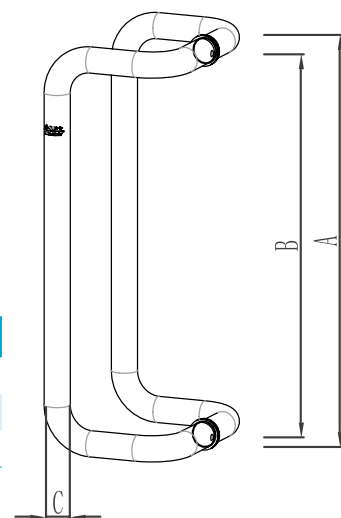


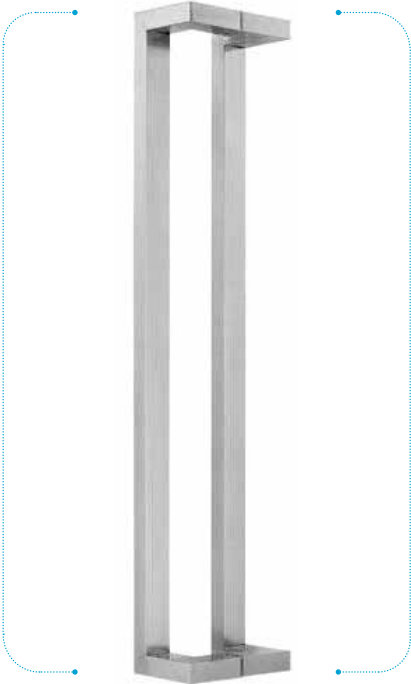

ML68

- Material: Stainless Steel 304
- Finishing: Satin
- Applicable Door Thickness: 10-65mm


Code	A(mm)	B(mm)	C(mm)
ML6806	600	575	25×38
ML6808	800	775	25×38
ML6812	1200	1175	25×38
ML6816	1600	1575	25×38

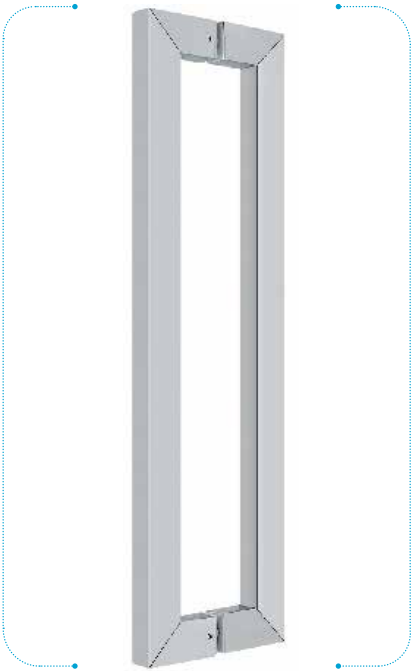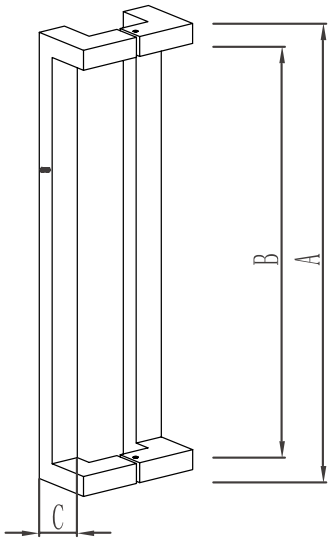

ML69

- Material: Stainless Steel 304
- Finishing: Satin
- Applicable Door Thickness: 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML6906	600	562	25×38
ML6908	800	762	25×38
ML6912	1200	1162	25×38

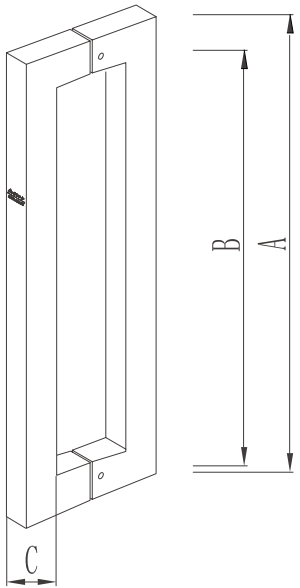




ML71

- **Material:** Stainless Steel 304
- **Finishing:** Mirror&Water transfer printing
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML7106	600	400	32
ML7108	800	500	38
ML7112	1200	800	38

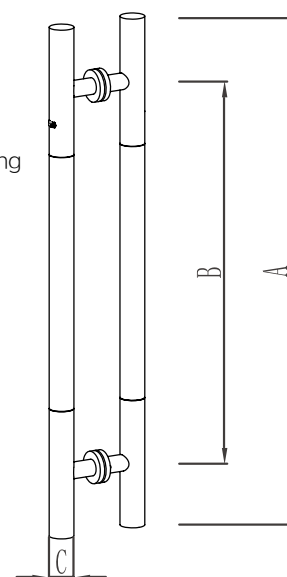


35



ML72

- **Material:** Stainless Steel 304
- **Finishing:** Mirror&Water transfer printing
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML7206	600	400	32
ML7208	800	500	38
ML7212	1200	800	38

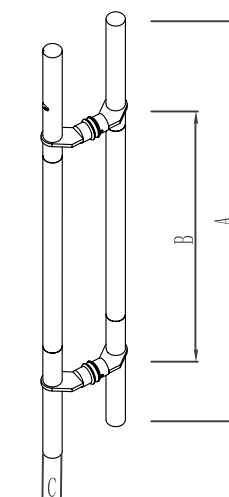




ML73

- **Material:** Stainless Steel 304
- **Finishing:** Mirror&Water transfer printing
- **Applicable Door Thickness:** 10-65mm


Code	A(mm)	B(mm)	C(mm)
ML7306	600	568	32
ML7308	800	762	38
ML7312	1200	1162	38

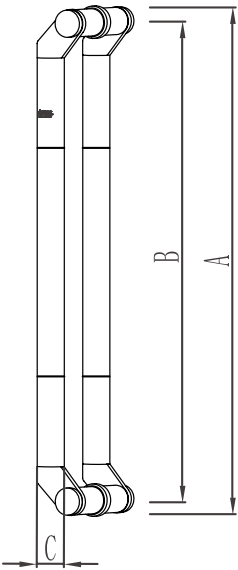

ML74

- **Material:** Stainless Steel 304
- **Finishing:** Mirror&Water transfer printing
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML7406	600	568	32
ML7408	800	762	38
ML7412	1200	1162	38

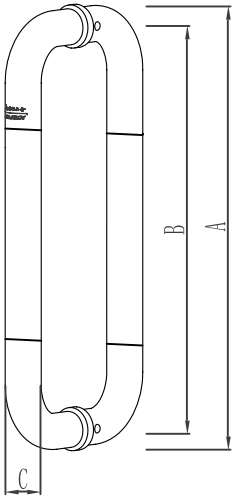





ML75

- **Material:** Stainless Steel 304
- **Finishing:** Mirror&Water transfer printing
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML7506	600	562	25×38
ML7508	800	762	25×38
ML7512	1200	1162	25×38

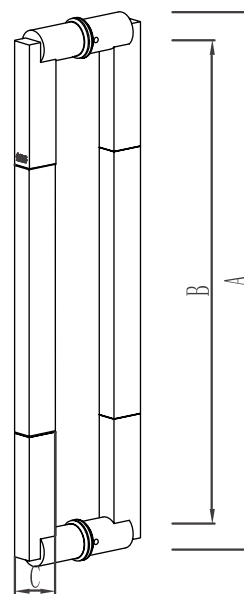


37

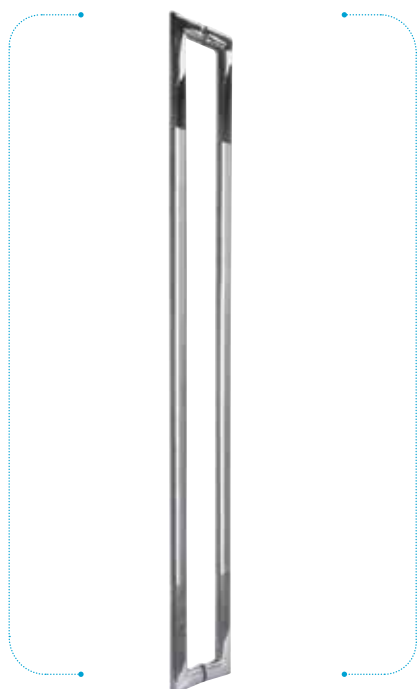

ML79

- **Material:** Stainless Steel 304
- **Finishing:** Satin & Mirror
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML7908	800	755	25X45
ML7910	1000	955	25X45
ML7912	1200	1155	25X45
ML7915	1500	1455	25X45
ML7918	1800	1755	25X45
ML7920	2000	1955	25X45

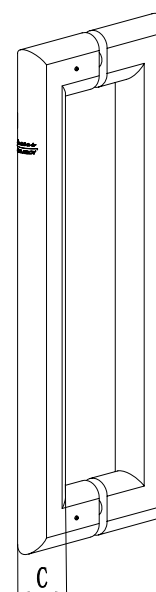




ML83

- Material: Stainless Steel 304
- Finishing: Satin & Mirror
- Applicable Door Thickness: 10-65mm


Code	A(mm)	B(mm)	C(mm)
ML8306	600	340	38
ML8308	800	500	38
ML8310	1000	700	38

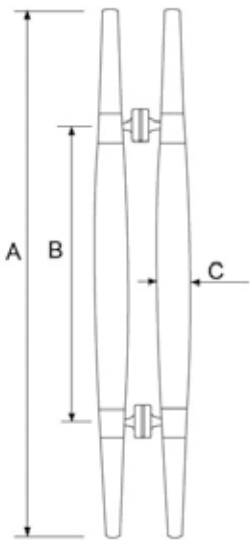


ML89

- Material: Stainless Steel 304
- Finishing: Satin & Mirror
- Applicable Door Thickness: 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML8908	800	775	25*45
ML8912	1200	1175	25*45
ML8924	2420	2395	25*45

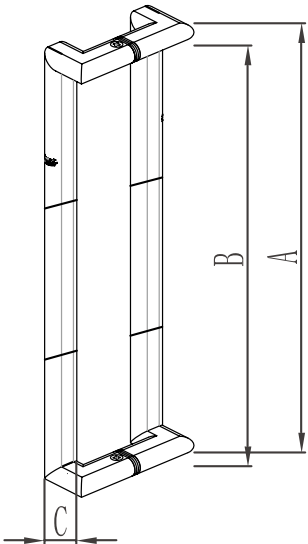


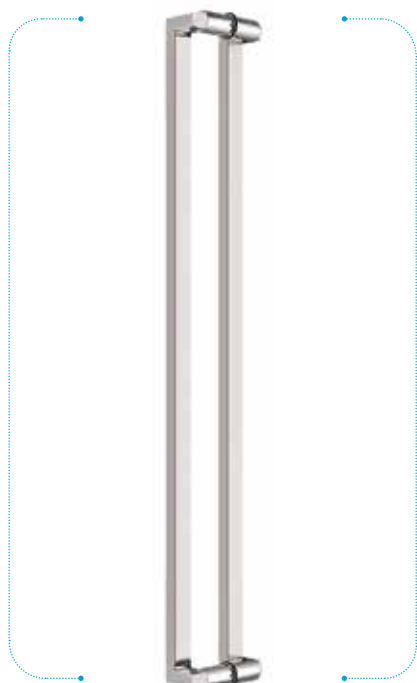


ML93

- **Material:** Stainless Steel 304
- **Finishing:** Satin & Mirror
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML9310	1000	975	25×38
ML9312	1200	1175	25×38
ML9320	2000	1975	25×38

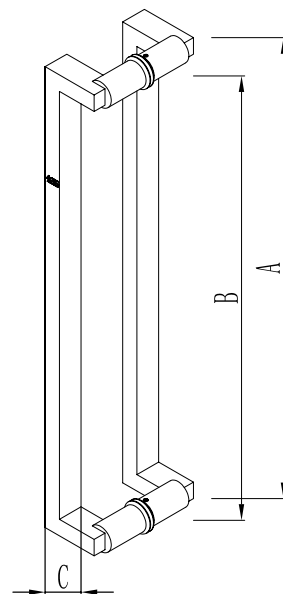

39

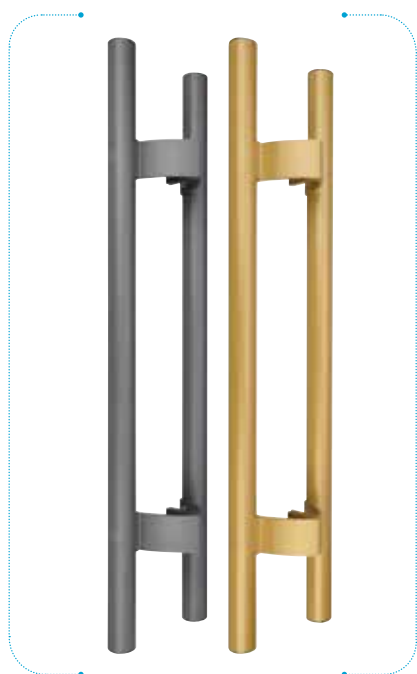


ML90

- **Material:** Aluminium alloy
- **Finishing:** Spray-paint
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML9006	600	400	38
ML9008	800	500	38
ML9012	1200	800	38
ML9015	1500	1100	38
ML9020	2000	1600	38
ML9024	2400	2000	38

Note: Colors are customizable according to the colour atlas of Guoqiang Hardware. It can add the antibacterial properties.

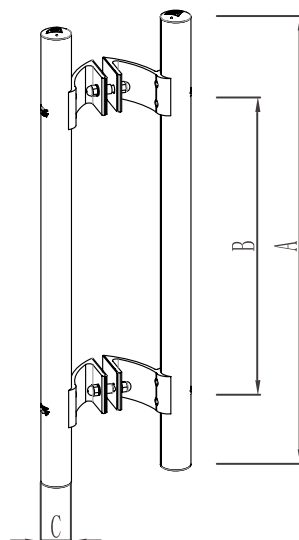




ML92

- **Material:** Aluminium alloy
- **Finishing:** Spray-paint
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML9204	400	300	34
ML9206	600	400	34
ML9208	800	500	38
ML9210	1000	700	38
ML9212	1200	800	38
ML9214	1400	1000	38
ML9215	1500	1100	38
ML9216	1600	1200	38
ML9218	1800	1400	38
ML9220	2000	1600	38
ML9222	2200	1800	38
ML9224	2400	2000	38

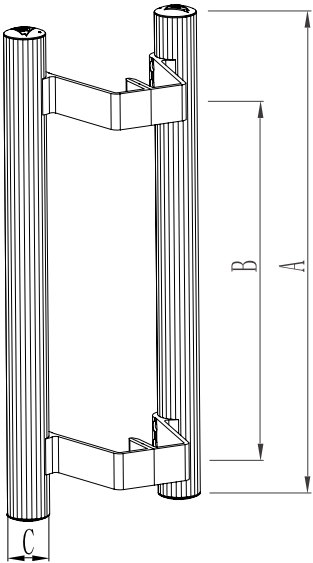


Note: Colors are customizable according to the colour atla of Guoqiang Hardware,It can add the antibacterial properties.



ML94X

- **Material:** Aluminium alloy
- **Finishing:** Spray-paint
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML9406X	600	400	38
ML9408X	800	500	38
ML9410X	1000	700	38
ML9412X	1200	800	38
ML9414X	1400	1000	38
ML9415X	1500	1100	38
ML9416X	1600	1200	38
ML9418X	1800	1400	38
ML9420X	2000	1600	38
ML9422X	2200	1800	38
ML9424X	2400	2000	38

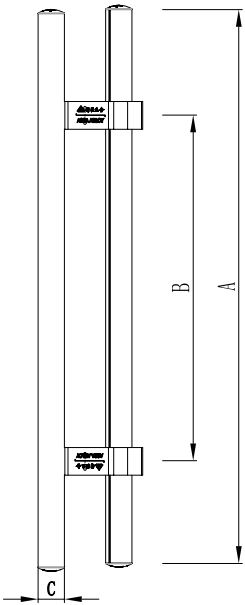

Note: Colors are customizable according to the colour atla of Guoqiang Hardware,It can add the antibacterial properties.




ML95

- **Material:** Aluminium alloy
- **Finishing:** Spray-paint
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML9506	600	400	38
ML9508	800	500	38
ML9510	1000	700	38
ML9512	1200	800	38
ML9515	1500	1100	38
ML9518	1800	1400	38
ML9520	2000	1600	38
ML9522	2200	1800	38
ML9524	2400	2000	38

Note: Colors are customizable according to the colour atlas of Guoqiang Hardware, It can add the antibacterial properties.

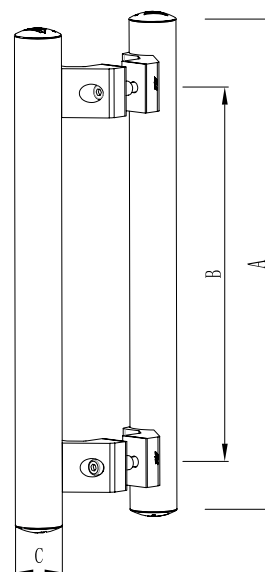

41




ML96

- **Material:** Aluminium alloy
- **Finishing:** Spray-paint
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML9606	600	400	38
ML9608	800	500	38
ML9610	1000	700	38
ML9612	1200	800	38
ML9615	1500	1100	38
ML9618	1800	1400	38
ML9620	2000	1600	38
ML9622	2200	1800	38
ML9624	2400	2000	38

Note: Colors are customizable according to the colour atlas of Guoqiang Hardware, It can add the antibacterial properties.

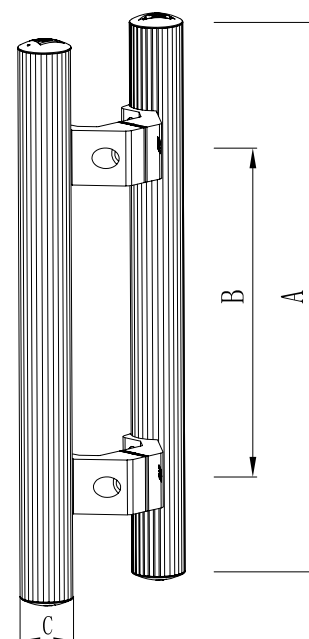




ML97

- **Material:** Aluminium alloy
- **Finishing:** Spray-paint
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)
ML9704	400	300
ML9706	600	400
ML9708	800	500
ML9710	1000	700
ML9712	1200	800
ML9714	1400	1000
ML9715	1500	1100
ML9718	1800	1400
ML9720	2000	1600
ML9722	2200	1800
ML9724	2400	2000

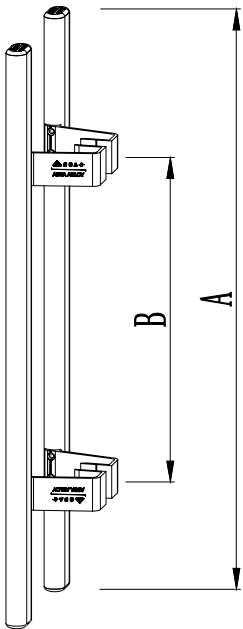


Note: Open hole size for pull handle in the profile doors is $\phi 10$;
Open hole size for pull handle in the glass doors is $\phi 12$;



ML98

- **Material:** Aluminium alloy
- **Finishing:** Spray-paint
- **Applicable Door Thickness:** 10-65mm

Code	A(mm)	B(mm)	C(mm)
ML9804	400	300	25X45
ML9806	600	400	25X45
ML9808	800	500	25X45
ML9810	1000	700	25X45
ML9812	1200	800	25X45
ML9814	1400	1000	25X45
ML9815	1500	1100	25X45
ML9818	1800	1400	25X45
ML9820	2000	1600	25X45
ML9822	2200	1800	25X45
ML9824	2400	2000	25X45

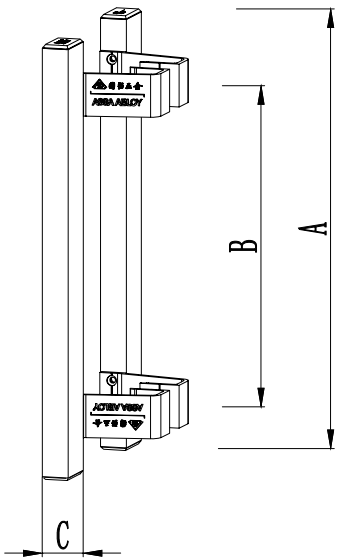


Note: Open hole size for pull handle in the profile doors is $\phi 10$;
Open hole size for pull handle in the glass doors is $\phi 12$;





HANDLE SERIES

MLX111

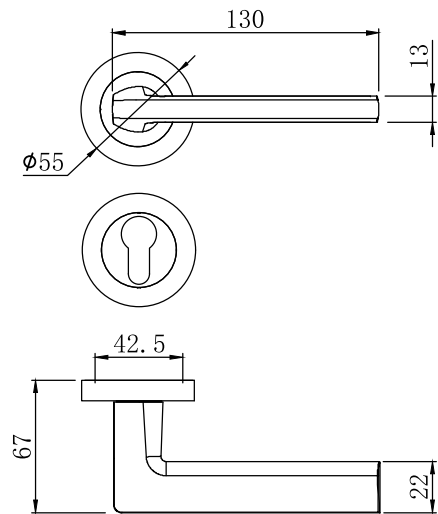

44

MLX121

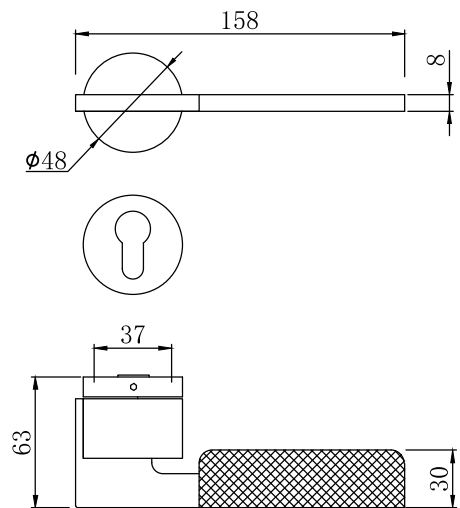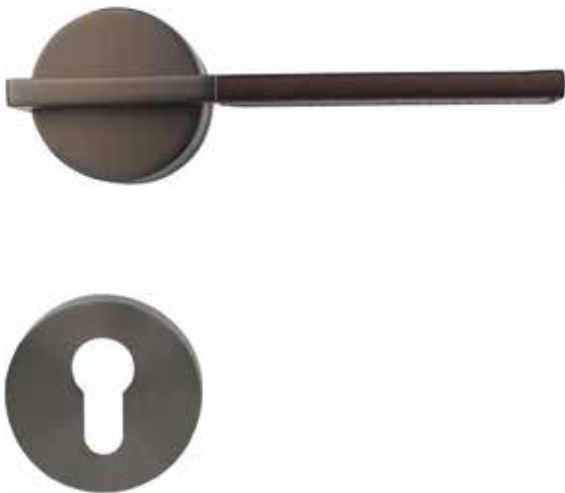

Applicable Door Thickness: 35-55mm

Material: Zinc alloy


Apply Door Type: Wood door/Steel door

Spindle: 8mm

Packing detail: Double side,handles,spindle,screws


Life Times: ≥ 100000 times

MLX131

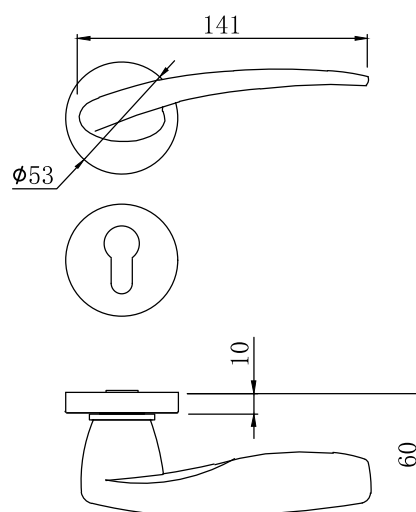


45

MLX141

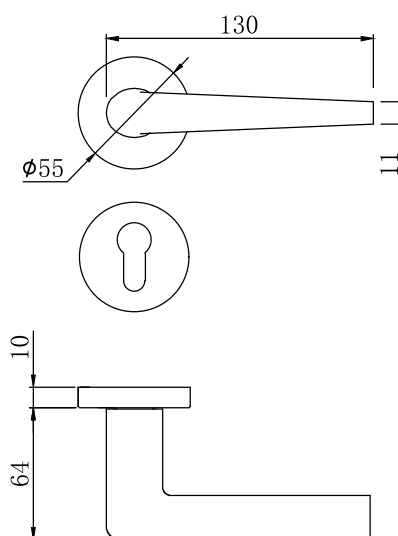


Applicable Door Thickness: 35-55mm
Material: Zinc alloy
Apply Door Type: Wood door, Steel door
Spindle: 8mm
Packing detail: Double side handles, spindle, screws
Life Times: ≥ 100000 times

MLX151

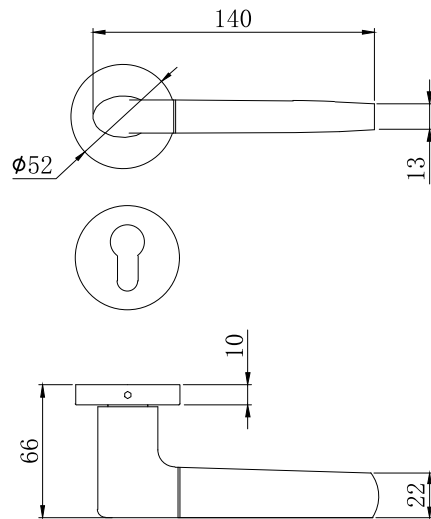

46

MLX161

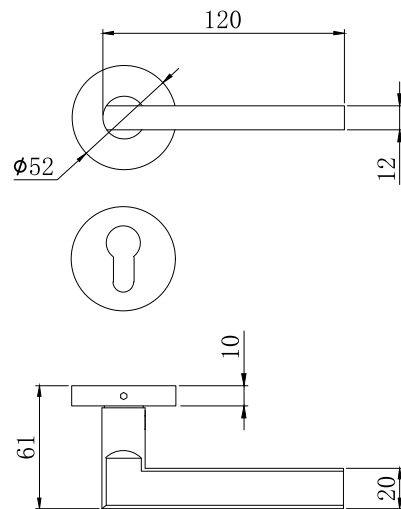

Optional Color: Satin Nickel, Grey, Black etc

Applicable Door Thickness: 35-55mm

Material: Zinc alloy


Apply Door Type: Wood door, Steel door

Spindle: 8mm

Packing detail: Double side handles, spindle, screws


Life Times: ≥ 100000 times

MLX162

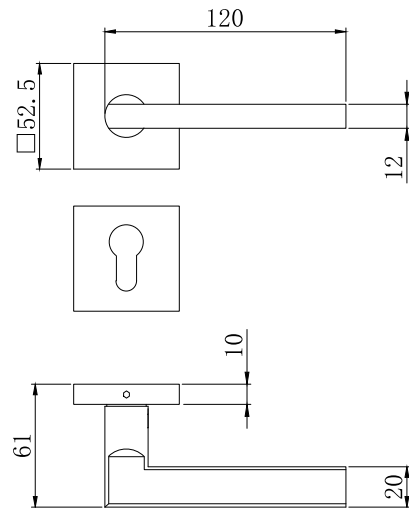

47

MLX181

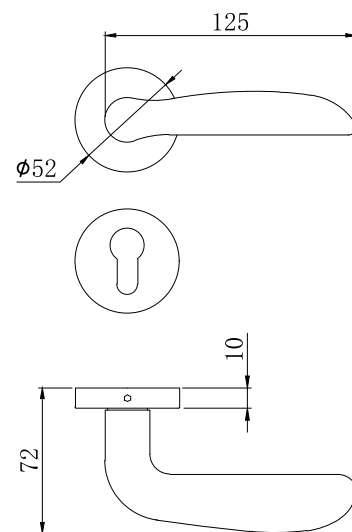

Optional Color: Satin Nickel, Grey, Black etc

Applicable Door Thickness: 35-55mm

Material: Zinc alloy


Apply Door Type: Wood door, Steel door

Spindle: 8mm

Packing detail: Double side handles, spindle, screws


Life Times: ≥ 100000 times

MLX192

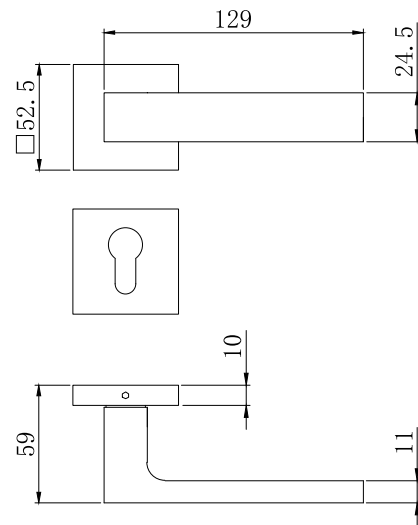

48

MLX1101

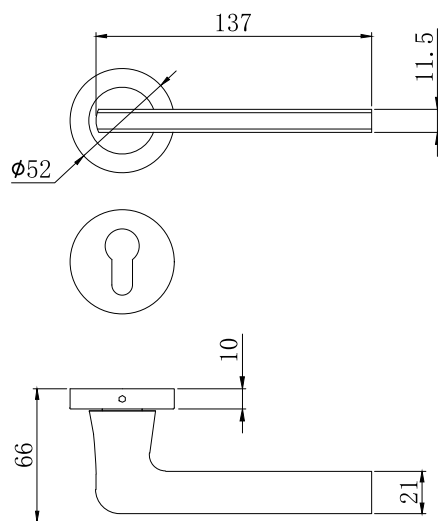

Optional Color: Satin Nickel, Grey, Black etc

Applicable Door Thickness: 35-55mm

Material: Zinc alloy



Apply Door Type: Wood door, Steel door

Spindle: 8mm

Packing detail: Double side handles, spindle, screws



Life Times: ≥ 100000 times

MLS111

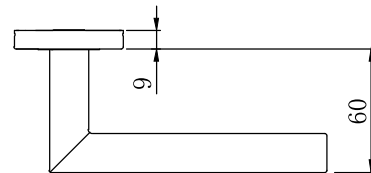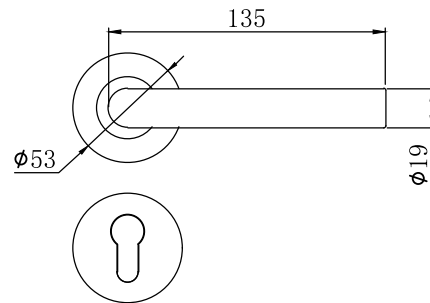

49

MLS121

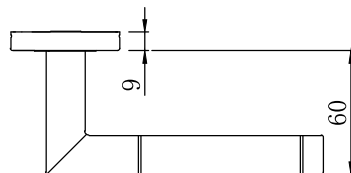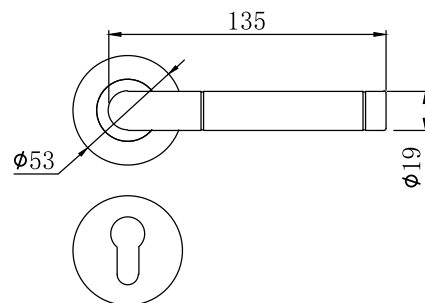

Applicable Door Thickness: 35-55mm

Material: SS304



Apply Door Type: Wood door, Steel door

Spindle: 8mm

Packing detail: Double side handles, spindle, screws



Life Times: ≥100000 times

MLS131

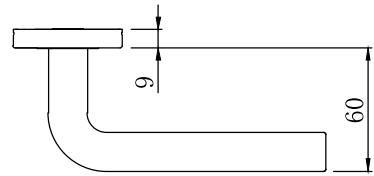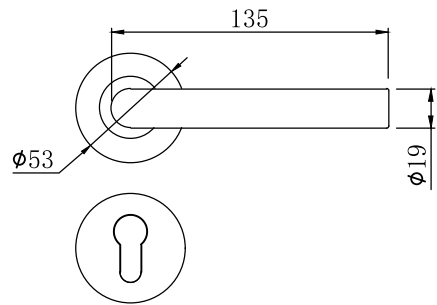

50

MLS141

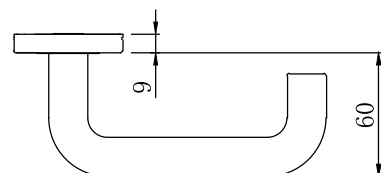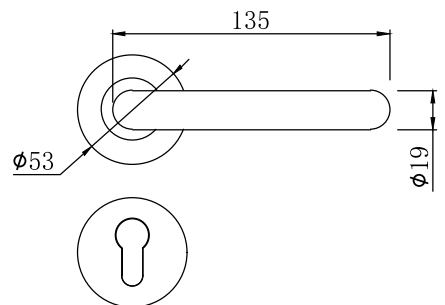

Applicable Door Thickness: 35-55mm

Material: SS304


Apply Door Type: Wood door, Steel door

Spindle: 8mm

Packing detail: Double side handles, spindle, screws


Life Times: ≥ 100000 times

MLS151

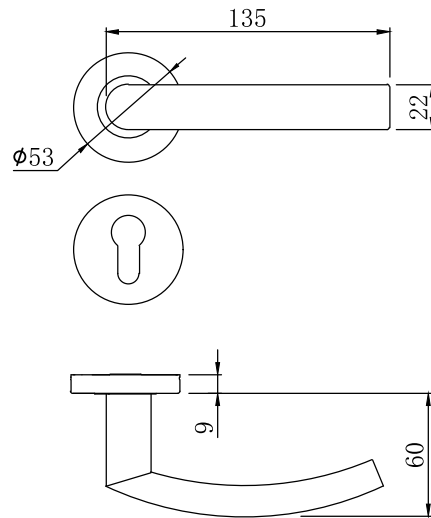

51

MLS161

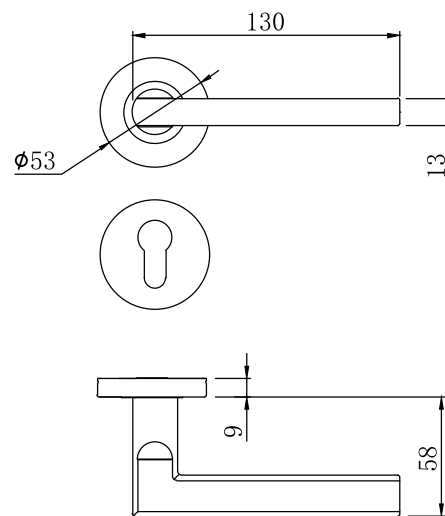

Applicable Door Thickness: 35-55mm

Material: SS304


Apply Door Type: Wood door, Steel door

Spindle: 8mm

Packing detail: Double side handles, spindle, screws


Life Times: ≥ 100000 times

MLS171

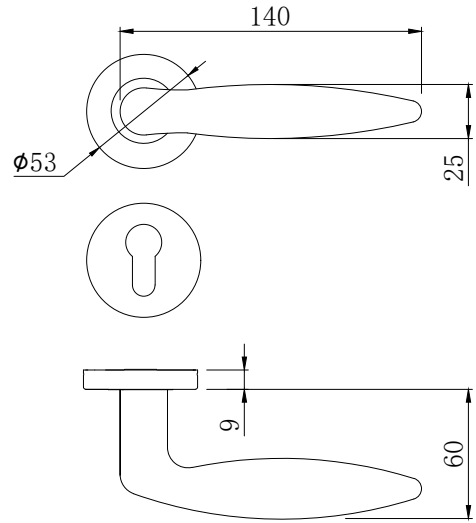

52

MLS181

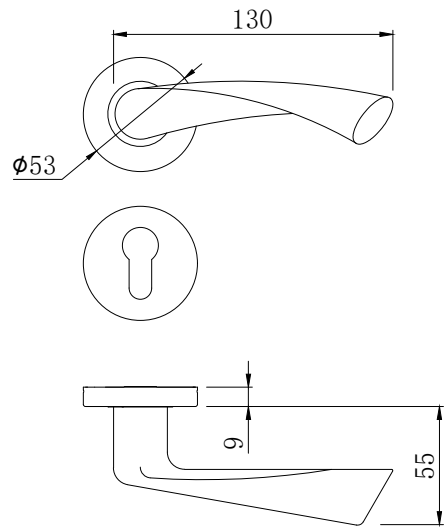

Applicable Door Thickness: 35-55mm

Material: SS304

Apply Door Type: Wood door, Steel door

Spindle: 8mm

Packing detail: Double side handles, spindle, screws

Life Times: ≥ 100000 times


6072-AZ61



6072-AZ64



53

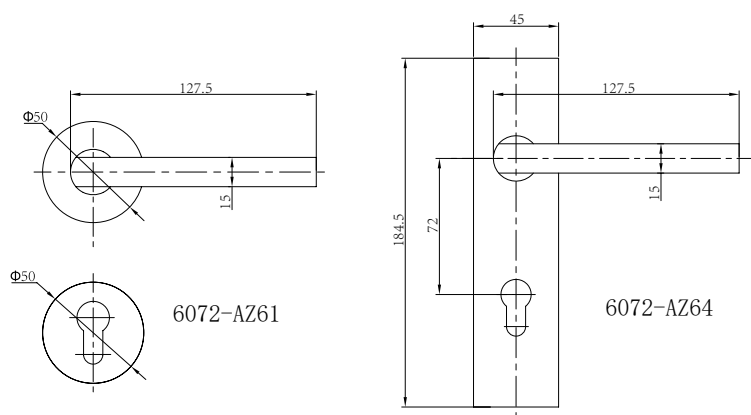

Applicable Door Thickness: 35-55mm
Material: Aluminum Alloy
Apply Door Type: Wood door, Steel door
Spindle: 8mm
Packing detail: Double side handles, spindle, screws
Life Times: ≥ 100000 times

54



Applicable Door Thickness: 35-55mm
Material: Aluminum Alloy
Apply Door Type: Wood door,Steel door
Spindle: 8mm
Packing detail: Double side handles,spindle,screws
Life Times: ≥ 100000 times


6072-AZ81




6072-AZ85



55

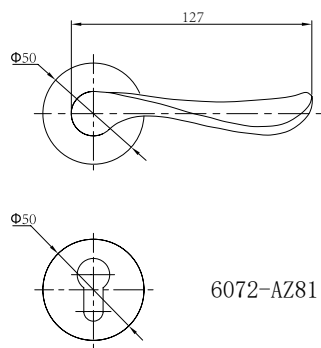

6072-AZ81

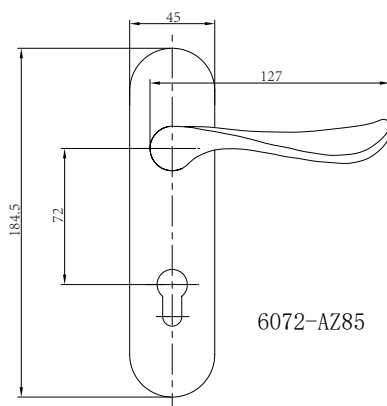

6072-AZ85




Applicable Door Thickness: 35-55mm
Material: Aluminum Alloy
Apply Door Type: Wood door, Steel door
Spindle: 8mm
Packing detail: Double side handles, spindle, screws
Life Times: ≥ 100000 times

6072-FZ02



56

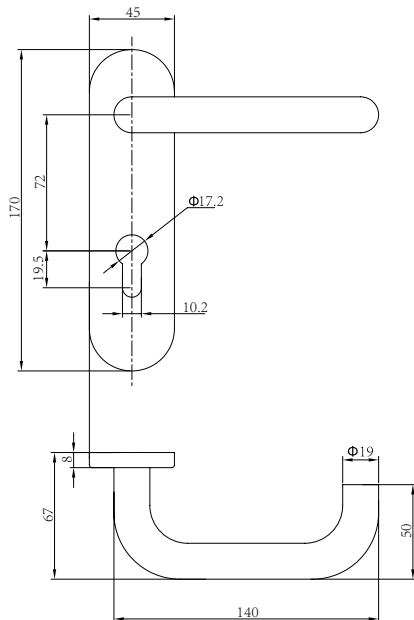

Applicable Door Thickness: 35-55mm

Material: SS304

Apply Door Type: Wood door, Steel door

Spindle: 8mm

Packing detail: Double side handles, spindle, screws


Life Times: ≥ 100000 times

K01-MZ5572

Anti Bacteria Nylon Handle



57

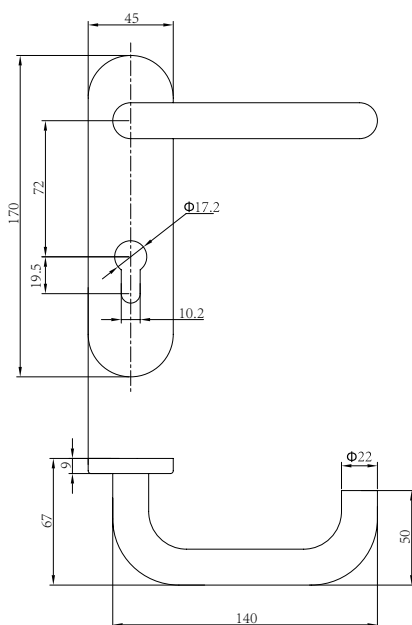


Anti Bacteria Nylon Handle
 Apply Door Thickness: 35-50mm
 Material: Carbon Steel body with Antibacterial nylon coated
 Apply Door Type: Wood door, Steel door, Medical door
 Spindle: 8mm
 Packing detail: Double side handles, spindle, screws
 Life Times: ≥ 100000 times

6068-FZ114



58

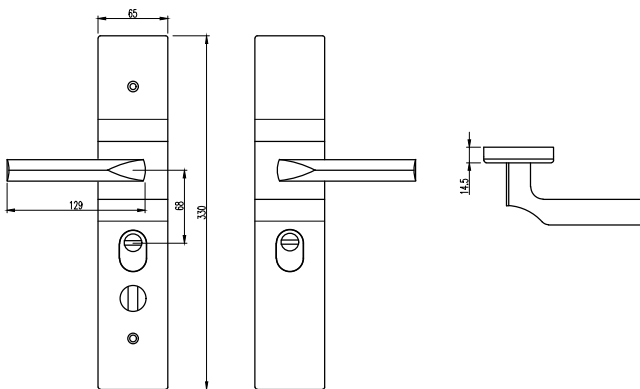

Applicable Door Thickness: 45-55mm

Material: SS304

Apply Door Type: House Entrance door

Spindle: 8mm


Packing detail: Double side handles,spindle,screws

Life Times: ≥ 100000 times

6068-FZ124



59

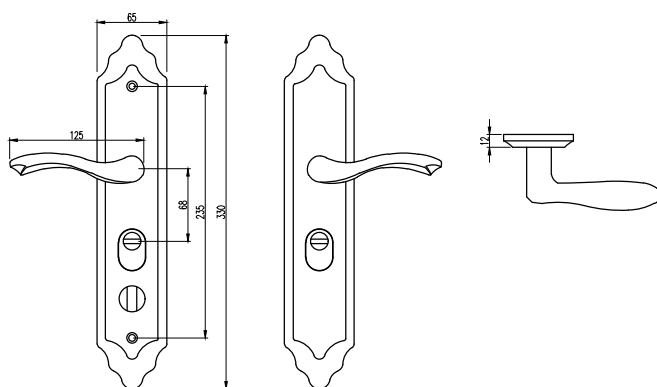

Applicable Door Thickness: 45-55mm

Material: SS304

Apply Door Type: House Entrance Door

Spindle: 8mm

Packing detail: Double side handles, spindle, screws

Life Times: ≥ 100000 times



GH70

Opening Mode:



Spec:


-  Intelligent human voice prompt
-  C-Level cylinder
-  Anti-theft peeping password input function
-  Low-voltage alarm function
-  Free handle, anti-violent opening
-  USB emergency power supply
-  Pry-proof structure design, safe and reliable

Technical Data

Item No.	GH70(black)
Size	370*76*23mm
Battery	4X1.55VAA Batteries
Opening method	Password + fingerprint + card + key
Working voltage	DC6V
Material	Aluminum alloy
Working temperature	-20° ~ +60°
Working humidity	10%-90%RH
Fingerprint Sensor	Semiconductor fingerprint collector
Keyboard	Touch button
Password capacity	50 passwords, 200 fingerprints and 100 cards
Verification time	≤300ms
Rejection rate	≤0.1%
False acceptance rate	< 0.0001%
Suitable door thickness	45-110mm



Lock body:

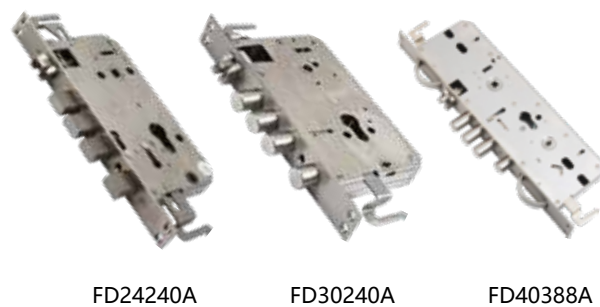

FD24240A


FD30240A

FD40388A



GH71

Opening Mode:



Spec:

-  Intelligent human voice prompt
-  C-Level cylinder
-  Anti-theft peeping password input function
-  Low-voltage alarm function
-  Free handle, anti-violent opening
-  USB emergency power supply
-  Pry-proof structure design, safe and reliable



Optional Color:



Black

Mocha brown

Technical Data

Item No.	GH71(black, mocha brown)
Size	370*76*23mm
Battery	4X1.55VAA Batteries
Opening method	Password + fingerprint + card + key
Working voltage	DC6V
Material	Aluminum alloy
Working temperature	-20° ~ +60°
Working humidity	10%-90%RH
Fingerprint Sensor	Semiconductor fingerprint collector
Keyboard	Touch button
Password capacity	100 passwords, 100 fingerprints and 100 cards
Verification time	≤300ms
Rejection rate	≤0.1%
False acceptance rate	< 0.0001%
Suitable door thickness	45-110mm

Lock body:



FD24240A

FD30240A

FD40388A



WSG2

Opening Mode:



Spec:

- Intelligent human voice prompt
- LED Screen
- Invisible C-Level cylinder
- Anti-theft peeping password input function
- Low-voltage alarm function
- Silent slider design
- Free handle, anti-violent opening
- USB emergency power supply
- Pry-proof structure design, safe and reliable

Technical Data

Item No.	WSG2(red bronze, gold)
Size	400*78*32mm
Battery	1.55VAA Batteries(4 or 8pcs)
Opening method	Password + fingerprint + card + key
Working voltage	DC6V
Material	Zinc alloy
Working temperature	-20° ~ +60°
Working humidity	10%-90%RH
Fingerprint Sensor	Semiconductor fingerprint collector
Keyboard	Touch button
Password capacity	10 passwords, 200 fingerprints and 100 cards
Verification time	≤300ms
Rejection rate	≤0.1%
False acceptance rate	< 0.0001%
Suitable door thickness	45-110mm



Optional Color:



Red bronze



Gold


Lock body:



FD24240A



FD30240A



FD40388A



WSG3

Opening Mode:



Spec:

- Intelligent human voice prompt
- LED Screen
- Invisible C-Level cylinder
- Anti-theft peeping password input function
- Low-voltage alarm function
- Silent slider design
- Free handle, anti-violent opening
- USB emergency power supply
- Pry-proof structure design, safe and reliable

Technical Data

Item No.	WSG3(black gold, red bronze)
Size	400*78*32mm
Battery	1.55VAA Batteries (4 or 8 pcs)
Opening method	Password + fingerprint + card + key
Working voltage	DC6V
Material	Zinc alloy
Working temperature	-30° ~ +60°
Working humidity	10%-90%RH
Fingerprint Sensor	Semiconductor fingerprint collector
Keyboard	Touch button
Password capacity	10 passwords, 200 fingerprints and 100 cards
Verification time	≤300ms
Rejection rate	≤0.1%
False acceptance rate	< 0.0001%
Suitable door thickness	45-110mm



Optional Color:

67



Red bronze



Black gold

Lock body:



FD24240A



FD30240A



FD40388A



GHX2D

Opening Mode:



Spec:

-  International standard universal lock body
-  Spare mechanical key, C-Level cylinder
-  Multilevel differentiation management
-  Low-voltage alarm function
-  Double quick lock body, lifting handle to quickly lock the door
-  Free handle, anti-violent opening



Lock body:



FD22238

FD22238A

FD22238B


Partial feature:



Technical Data

Item No.	GHX2D(natural colour, black)
Size	300*50*24mm
Battery	4X1.55VAA Batteries
Lock CTC Size	85mm
Opening method	Password + fingerprint + key + card
Working voltage	DC6V
Material	SS304
Working temperature	-30° ~ +60°
Working humidity	10%-90%RH
Fingerprint Sensor	Semiconductor collector
Keyboard	Touch button
Password capacity	100 passwords, 150 fingerprints and 150 cards
Verification time	≤300ms
Rejection rate	≤0.1%
False acceptance rate	< 0.0001%
Suitable door thickness	Door Sash Allowable Depth for Lock body holes>50mm, Thickness>35mm



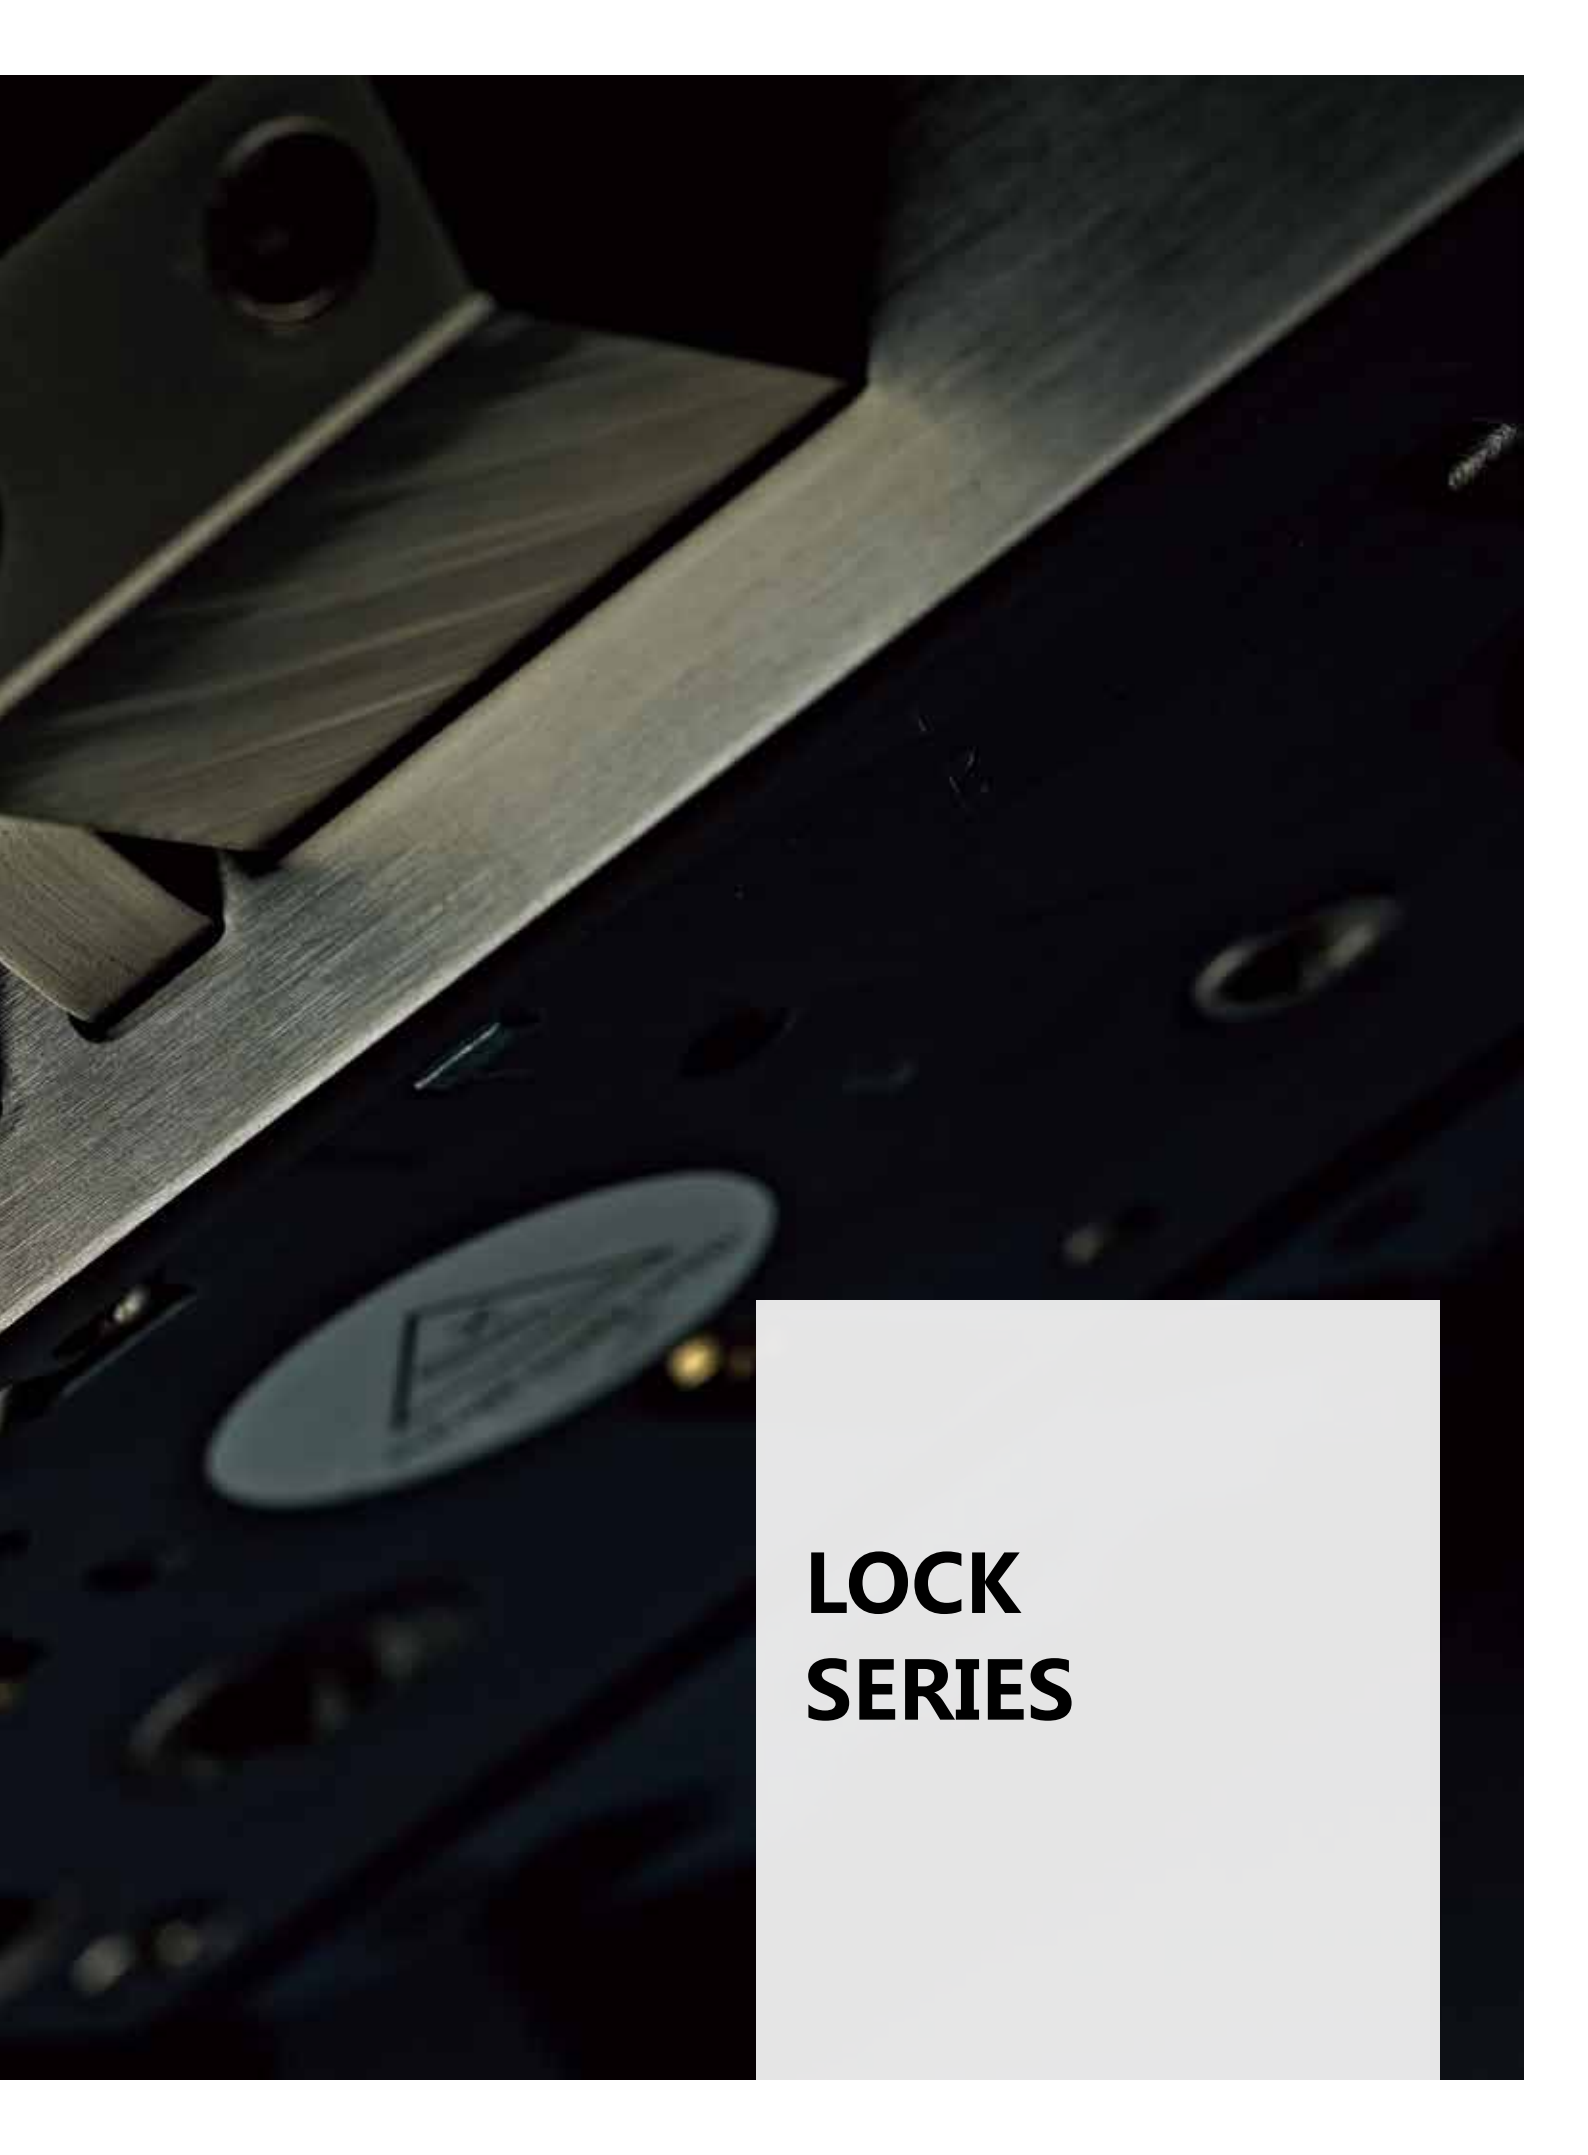




LOCK SERIES

7255


72 SERIES

Item No.	Backset	Center Distance	Plate Width
7255-MS03Y	55	72	24

Remarks:
Z stands for right corner of the face plate
Y stands for round corner of the face plate

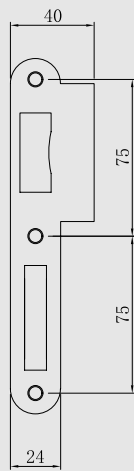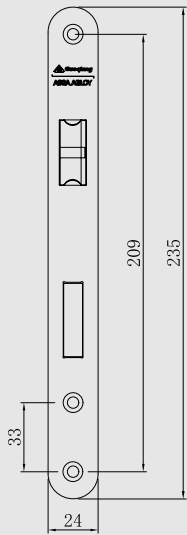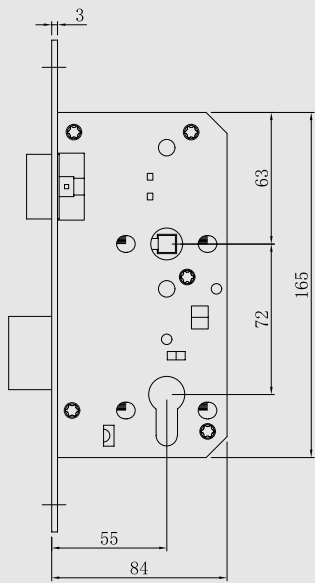

Spindle: 8mm
Center Distance : 72mm
Backset: 55mm
Faceplate Material: 304
Lock Case: Anti fingerprint plate
Latch Bolt: 304
Dead Bolt: 304
Plate Width: 24mm

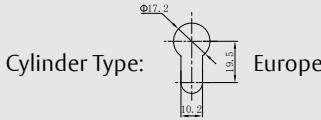

5572

72 SERIES




Item No.	Backset	Center Distance	Plate Width
5572-FS02Z	55	72	20
5572-FS02Y	55	72	20
5572-FS02.1Z	55	72	24
5572-FS02.1Y	55	72	24


Remarks:

Z stands for right corner of the face plate

Y stands for round corner of the face plate

Spindle: 8mm
Center Distance : 72mm
Backset: 55mm
Faceplate Material: 304
Lock Case: Anti fingerprint plate
Latch Bolt: 304
Dead Bolt: 304
Plate Width: 20/24mm

Cylinder Type:  Europe

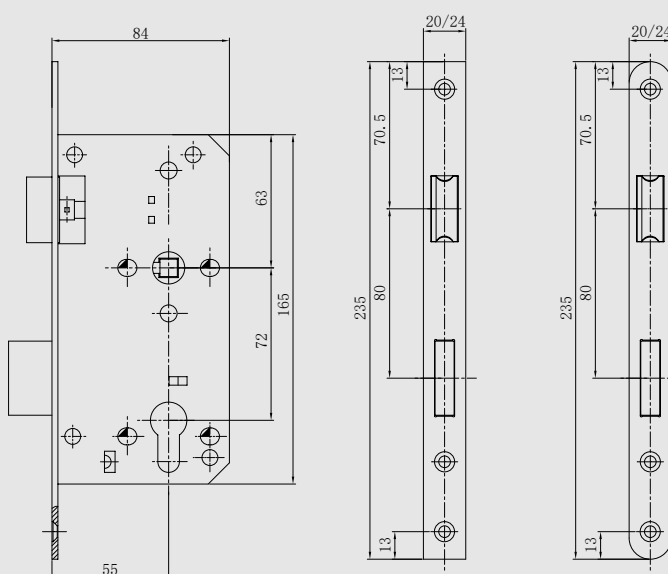


6072


72 SERIES

Item No.	Backset	Center Distance	Plate Width
6072-FS01Z	60	72	20
6072-FS01Y	60	72	20
6072B-FS01Z	60	72	24
6072B-FS01Y	60	72	24

Remarks:
Z stands for right corner of the face plate
Y stands for round corner of the face plate

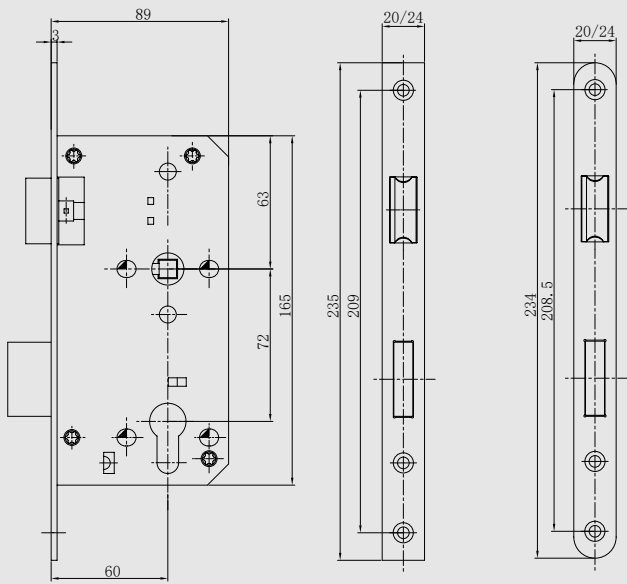

Spindle: 8mm
Center Distance : 72mm
Backset: 60mm
Faceplate Material: 304
Lock Case: Anti fingerprint plate
Latch Bolt: 304
Dead Bolt: 304
Plate Width: 20/24mm

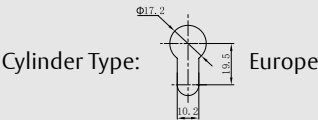



6072D Only Dead Bolt

72 SERIES

Item No.	Backset	Plate Width
6072D-FS01Z	60	20
6072D-FS01Y	60	20
6072D-FS01.1Z	60	24
6072D-FS01.1Y	60	24

Remarks:

Z stands for right corner of the face plate

Y stands for round corner of the face plate

Backset: 60mm


Faceplate Material: 304

Lock Case: Anti fingerprint plate


Dead Bolt: 304

Plate Width: 20/24mm

Cylinder Type:



Europe

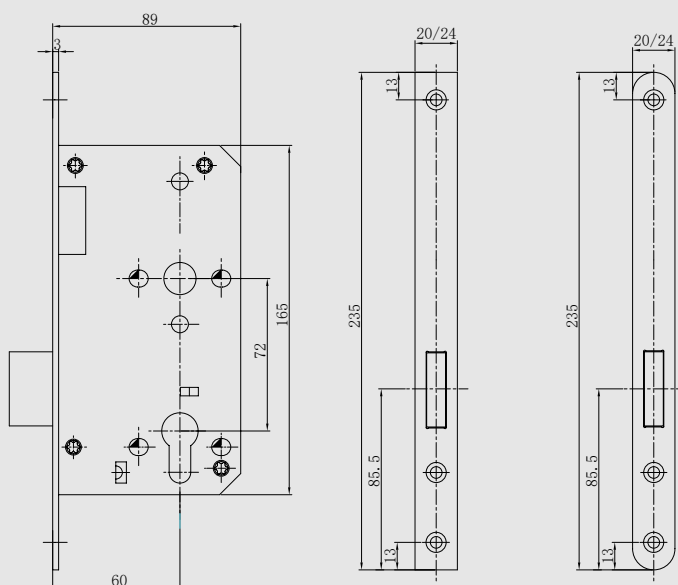


6072D Only Latch Bolt

72 SERIES

Item No.	Backset	Plate Width
6072D-FS02Z	60	20
6072D-FS02Y	60	20
6072D-FS02.1Z	60	24
6072D-FS02.1Y	60	24

Remarks:
Z stands for right corner of the face plate
Y stands for round corner of the face plate

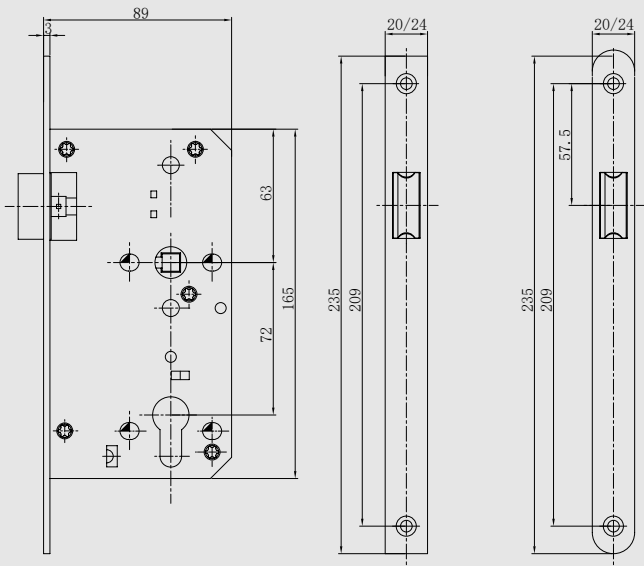

Spindle: 8mm
Backset: 60mm
Faceplate Material: 304
Lock Case: Anti fingerprint plate
Latch Bolt: 304
Plate Width: 20/24mm


WS7250-MS02Z

72 SERIES



Item No.	Backset	Center Distance	Plate Width
WS7250-MS02Z	50	72	24

Backset: 50mm
Center Distance : 72mm
Spindle: 8mm
Faceplate Material: 201
Lock Case: Anti fingerprint plate
Latch Bolt: Zink Alloy
Plate Width: 24mm
Plate Thickness: 1.5mm
Mute Design: Yes

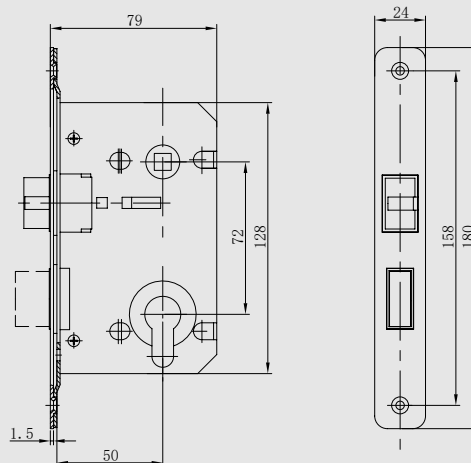


5500 Dead Bolt


TUBE WELL AISLE LOCK SERIES

Item No.	Backset	Plate Width
5500-FS01Z	55	20
5500-FS01Y	55	20
5500-FS01.1Z	55	24
5500-FS01.1Y	55	24

Remarks:
Z stands for right corner of the face plate
Y stands for round corner of the face plate

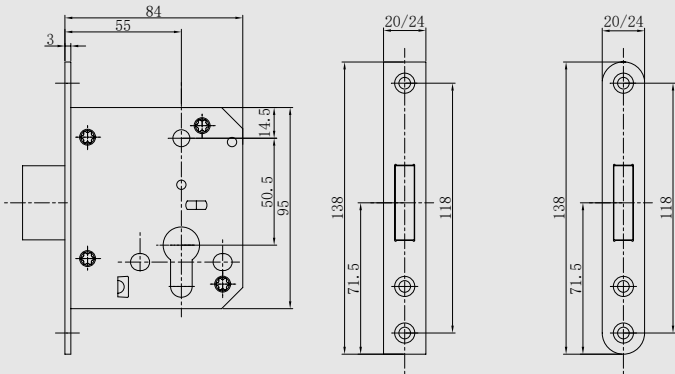

Backset: 55mm
Faceplate Material: 304
Lock Case: Anti fingerprint plate
Dead Bolt: 304
Plate Width: 20/24mm
Plate thickness: 3mm

Cylinder Type:  Europe



5500 Latch Bolt

TUBE WELL AISLE LOCK SERIES


Item No.	Backset	Plate Width
5500-FS02Z	55	20
5500-FS02Y	55	20
5500-FS02.1Z	55	24
5500-FS02.1Y	55	24

Remarks:

Z stands for right corner of the face plate

Y stands for round corner of the face plate


Backset: 55mm
Spindle: 8mm
Faceplate Material: 304
Lock Case: Anti fingerprint plate
Latch Bolt: 304
Plate Width: 20/24mm
Plate thickness: 3mm

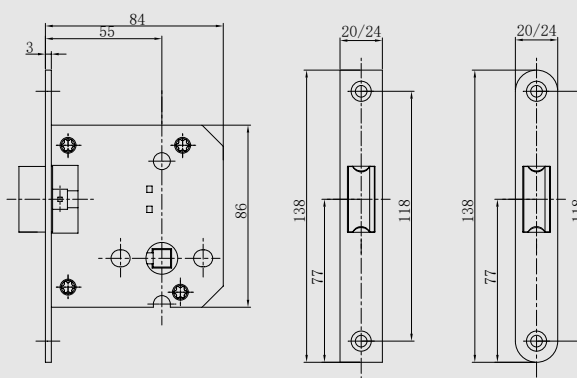

FD22238

85 SERIES

Item No.	Backset H	Center Distance	Lock Depth H
FD22238	35	85	51
FD22238A	45	85	61
FD22238B	40	85	56

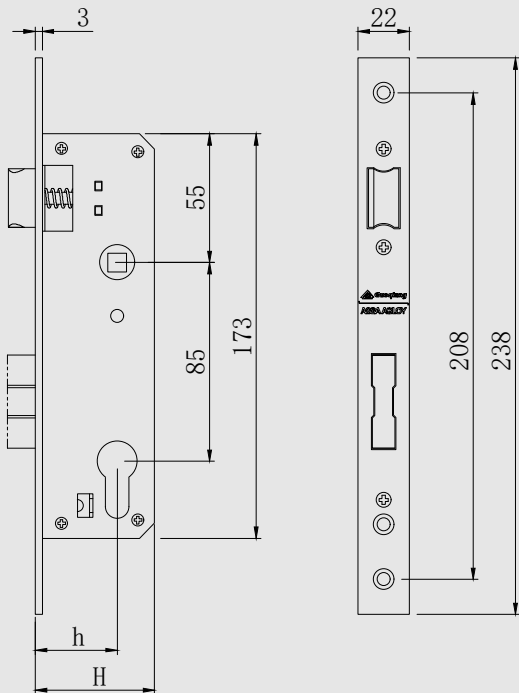

Spindle: 8mm
Center Distance : 85mm
Backset: 35mm
Faceplate Material: 304
Lock Case: 304
Latch Bolt: 304
Dead Bolt: 304
Plate Width: 22mm
Lift up for lock


2585

85 SERIES



Item No.	Backset H	Center Distance	Lock Depth H
2585	25	85	42
3085	30	85	47
3585	35	85	52


Spindle: 8mm
Center Distance : 65mm
Backset: 68mm
Faceplate Material: 304/201
Lock Case: 304
Latch Bolt: 304/201
Dead Bolt: 304/201
Plate Width: 22mm

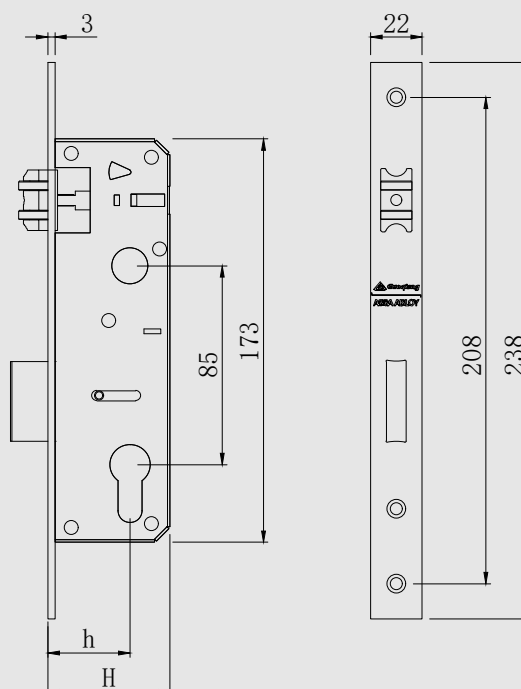

FD30240A

68 SERIES

Item No.	Backset	Center Distance	Plate Width
FD30240A	60	68	30

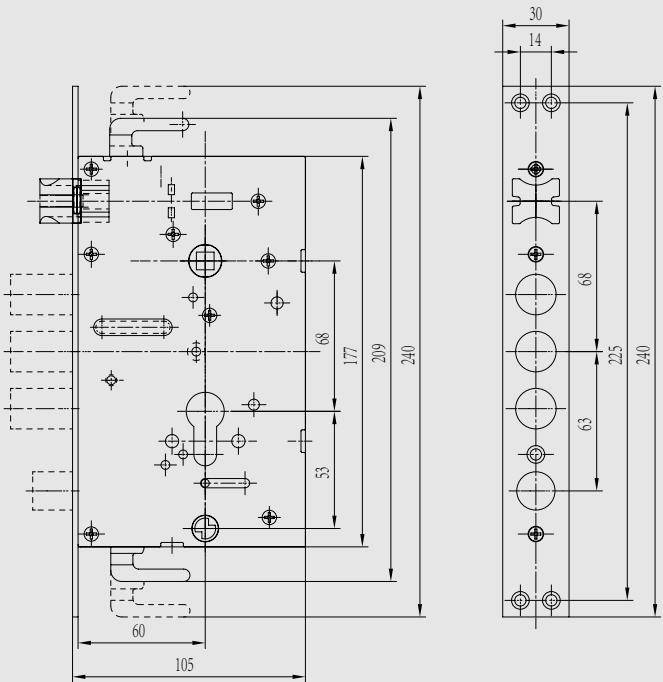

Spindle: 8mm
Center Distance : 68mm
Backset: 60mm
Faceplate Material: 304
Lock Case: 304
Latch Bolt: 304
Dead Bolt: 304
Plate Width: 30mm
Lift up for lock


FD24240A

68 SERIES



Item No.	Backset	Center Distance	Plate Width
FD24240A	60	68	24


Spindle: 8mm
Center Distance : 68mm
Backset: 60mm
Faceplate Material: 304
Lock Case: 304
Latch Bolt: 304
Dead Bolt: 304
Plate Width: 24mm
Lift up for lock

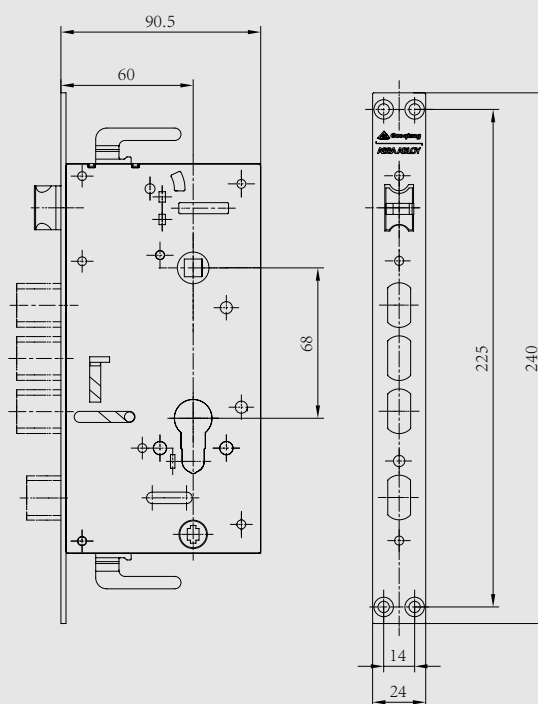

FD40388

68 SERIES

Item No.	Backset	Center Distance	Plate Width
FD40388	60	68	40

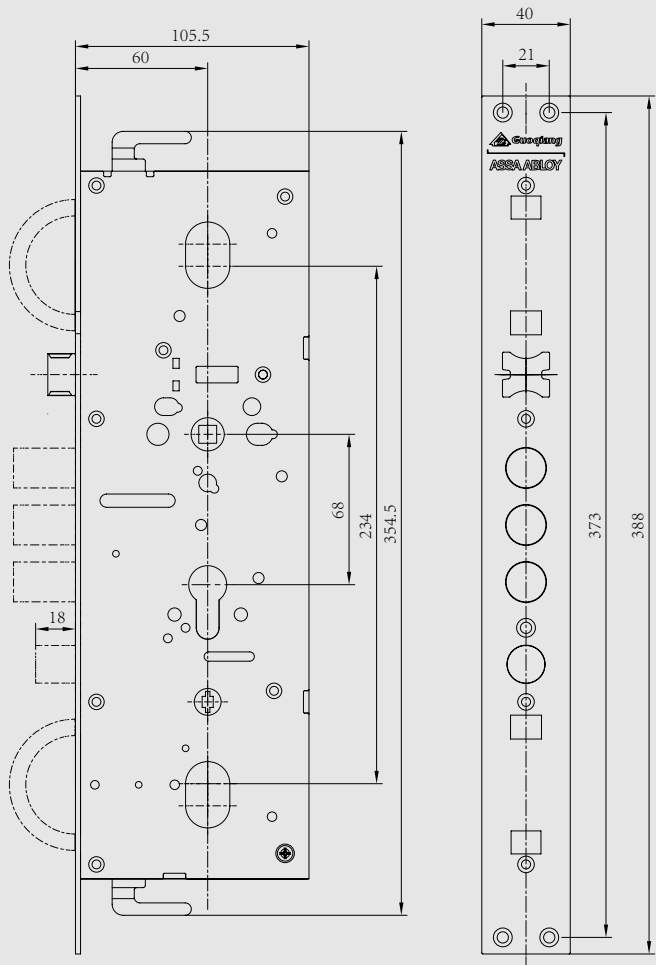

Spindle: 8mm
Center Distance : 68mm
Backset: 60mm
Faceplate Material: 304
Lock Case: 304
Latch Bolt: 304
Dead Bolt: 304
Plate Width: 40mm
Lift up for lock


FD24260

68 SERIES

Item No.	Backset	Center Distance	Plate Width
FD24260	75	68	24




Spindle: 8mm
Center Distance : 75mm
Backset: 68mm
Faceplate Material: 304
Lock Case: 304
Latch Bolt: 304
Dead Bolt: 304
Plate Width: 24mm
Lift up for lock

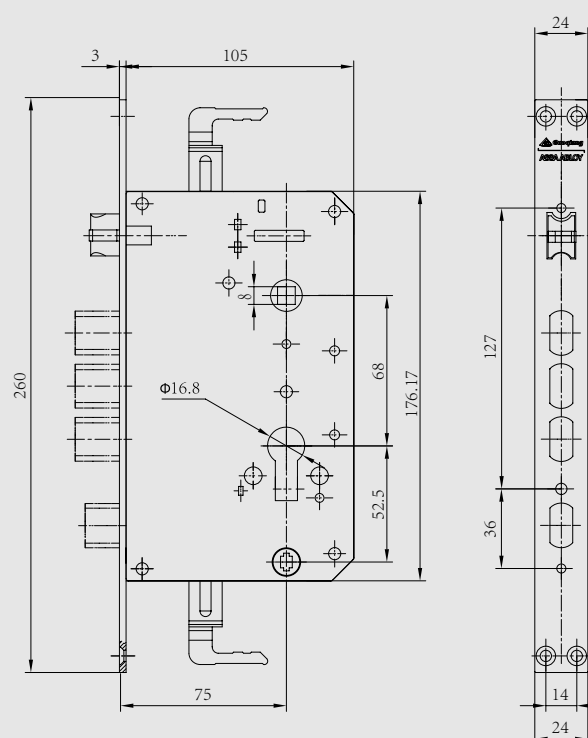

FD33210

68 SERIES

Item No.	Backset	Center Distance	Plate Width
FD33210	65	68	33

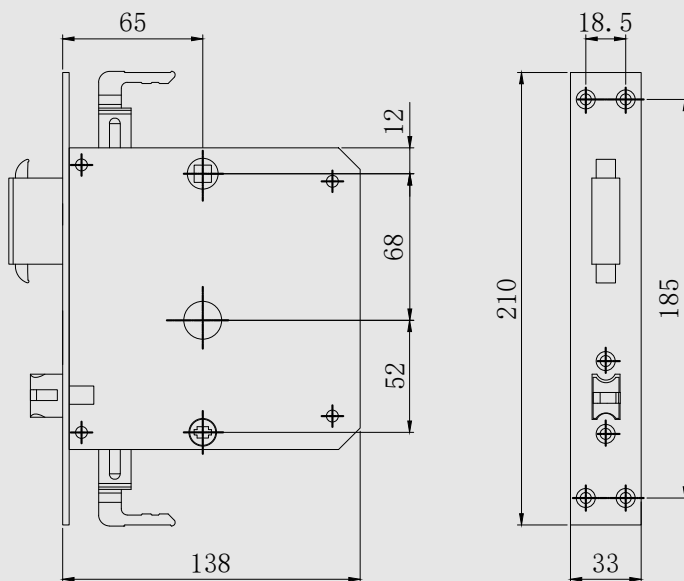


Spindle: 8mm
 Center Distance : 65mm
 Backset: 68mm
 Faceplate Material: 304
 Lock Case: 304
 Latch Bolt: 304
 Dead Bolt: 304
 Plate Width: 33mm
 Lift up for lock

TS1000-F01

PUSH BAR LOCK SERIES

PRODUCT DESCRIPTION

1. Single point lock, easy to open.
2. The length of the lock can be adjusted according to the width of the door.
3. Main material is SS304.
4. Finishing: Brushed or customized.
5. Life: 200,000 times


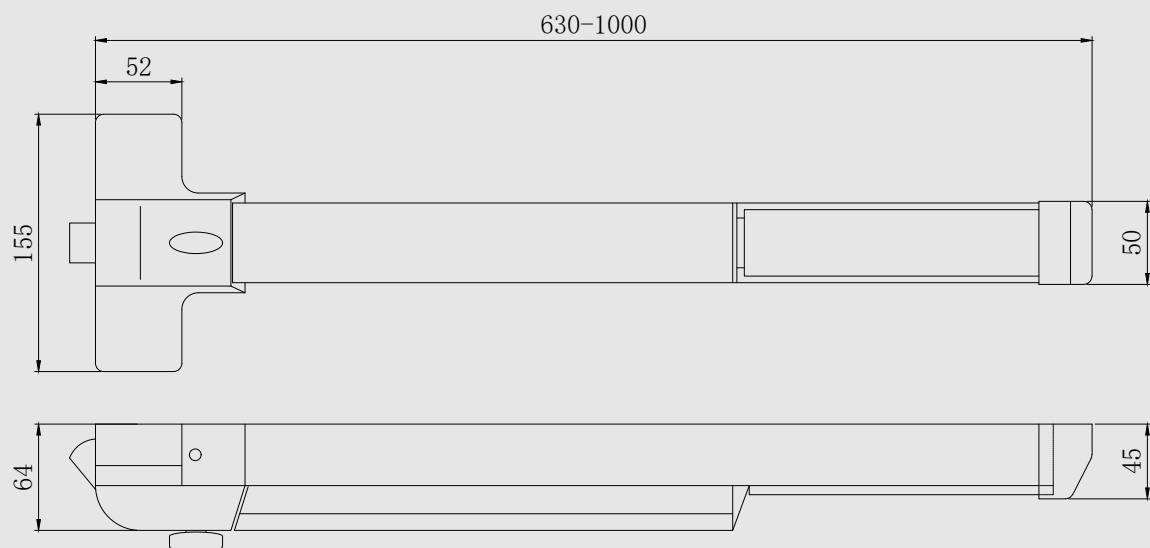


TS1000-F02

PUSH BAR LOCK SERIES

PRODUCT DESCRIPTION

- 1.Two points lock,easy to open.
- 2.The length of the lock can be adjusted according to the width of the door.
- 3.Main material is SS304.
- 4.Finishing: Brushed or customized.
- 5.Life: 200,000 times

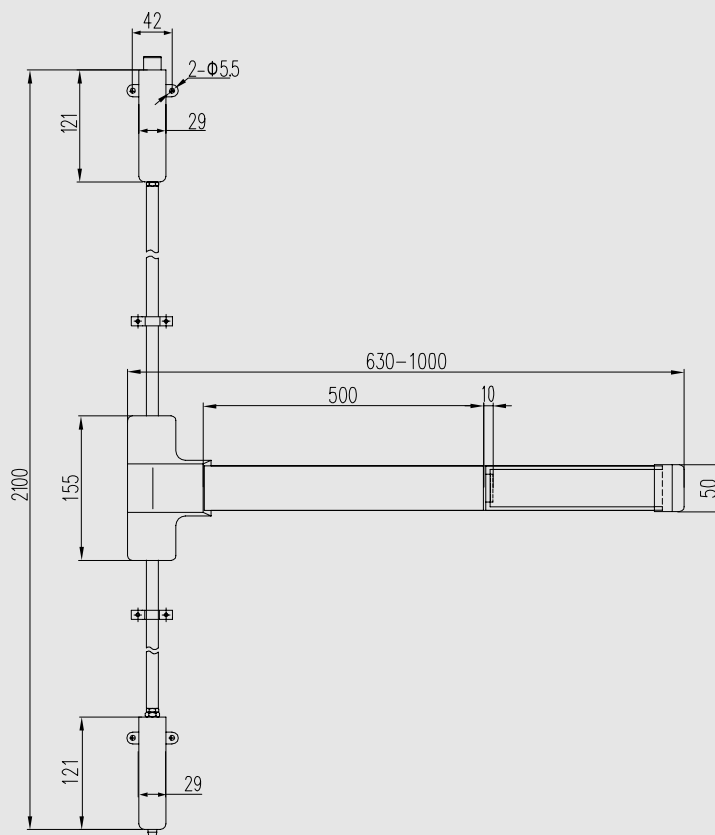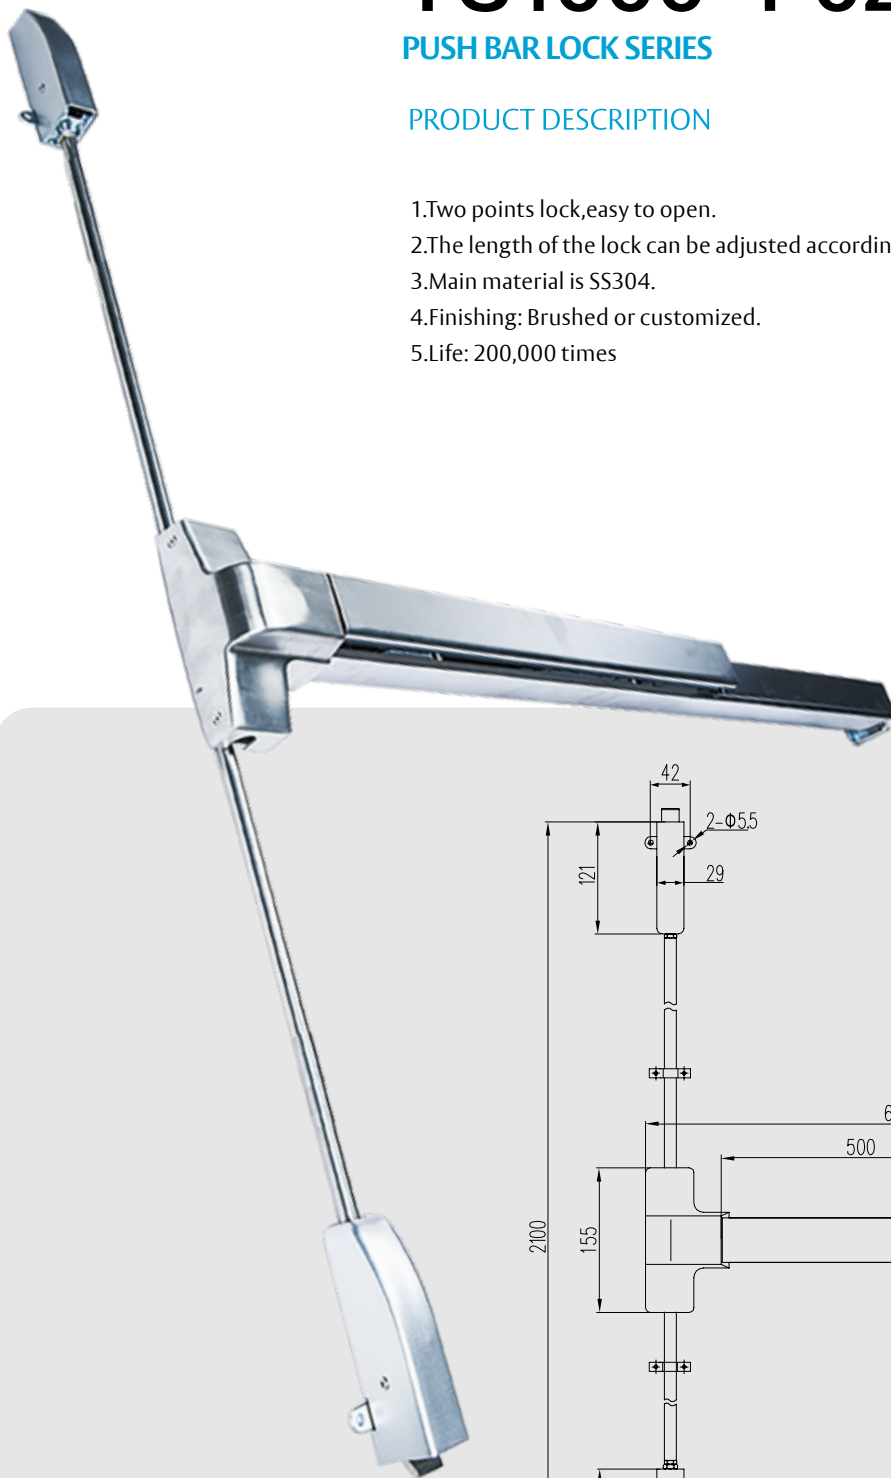

CYLINDER SERIES



Key+Knob Cylinder MLS35*35N

Discription: 1.Common Cylinder with Length 70mm
2.H59 Material, Bright nickel,Sand nickel or PVD Gold plated, black color etc;
3.Suitable for doors;



Bathroom Cylinder MLS35*35NW

Discription: 1.Common Cylinder with Length 70mm
2.H59 Material,Sand nickelpated;
3.Suitable for bathroom doors;




Key+Dead End Cylinder MDD10*35

Discription: 1.Length: 45mm
2.Material: H59 ,brushed finishing



Knob+Dead End Cylinder MDD10*35N

Discription: 1.Length: 45mm
2.Material: H59 ,brushed finishing

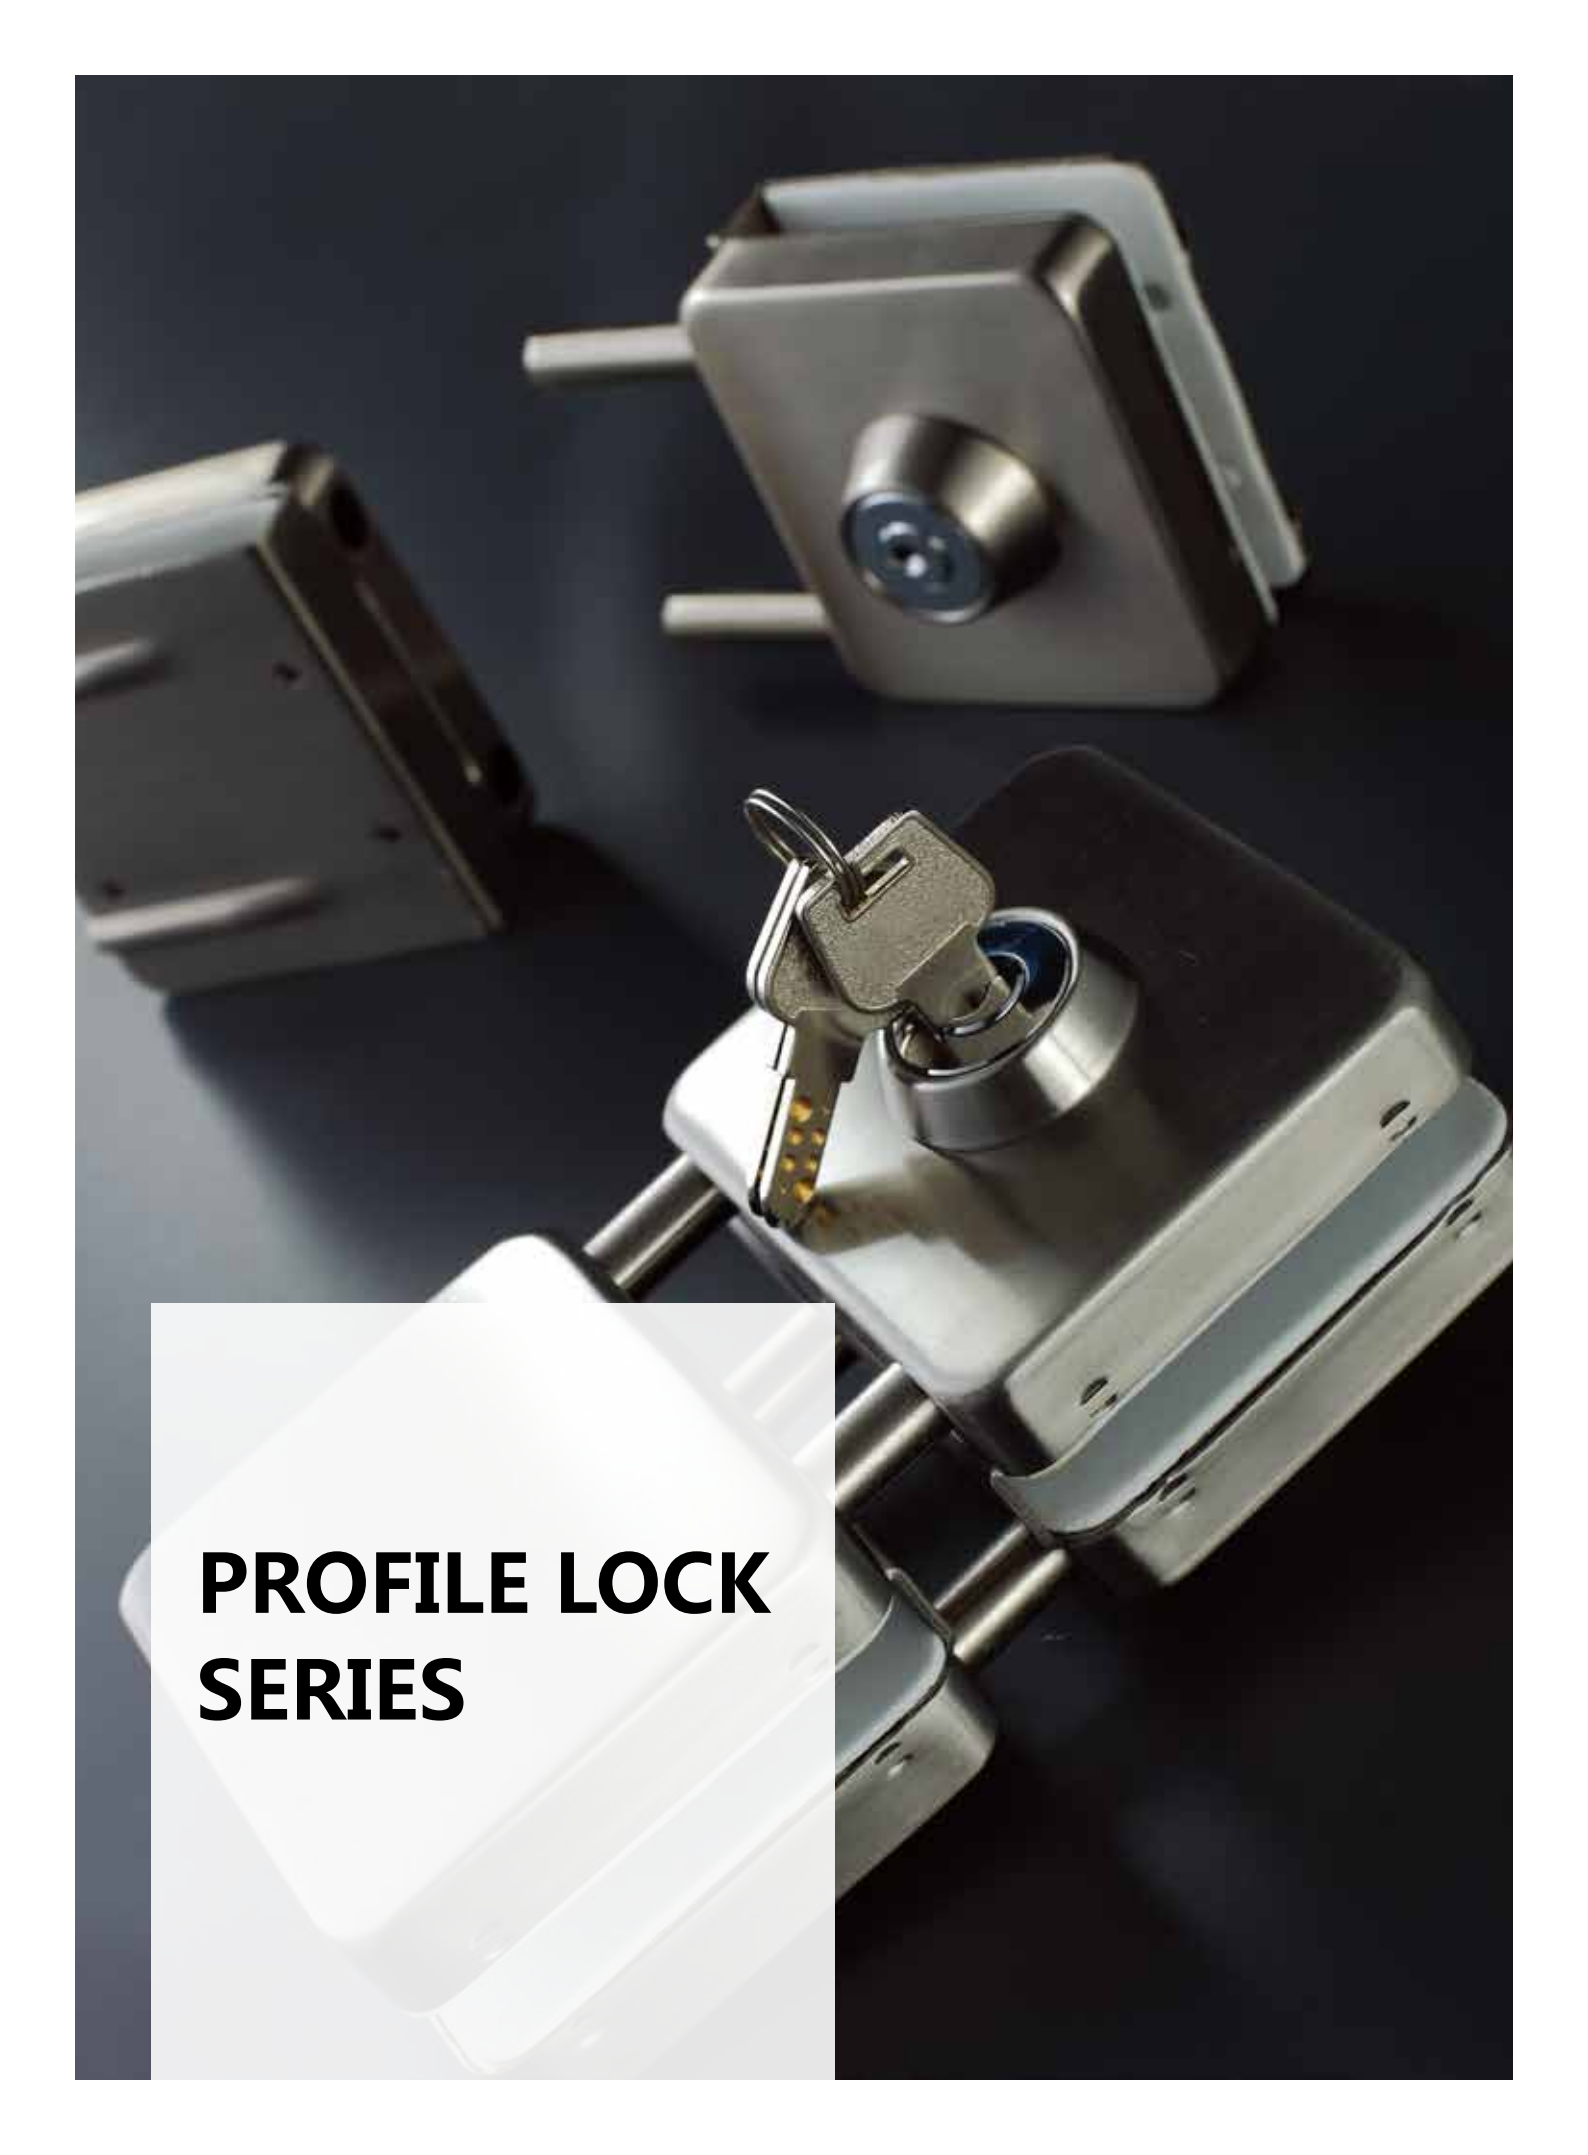

The image displays three stainless steel profile locks of varying sizes, arranged diagonally from the top left to the bottom right. Each lock features a cylindrical keyhole with a key inserted. The locks are mounted on a dark, reflective surface, and the lighting highlights the metallic texture and the blue-tinted keyholes. A white rectangular overlay is positioned in the bottom left corner, containing the text 'PROFILE LOCK SERIES' in bold, black, sans-serif capital letters.


PROFILE LOCK SERIES



Floor Lock for Profile Door

Material: Zinc Alloy
Stainless steel
Finishing: Brushed


Item No.	Profile Thickness
MS401	40-50mm
MS402	55-65mm

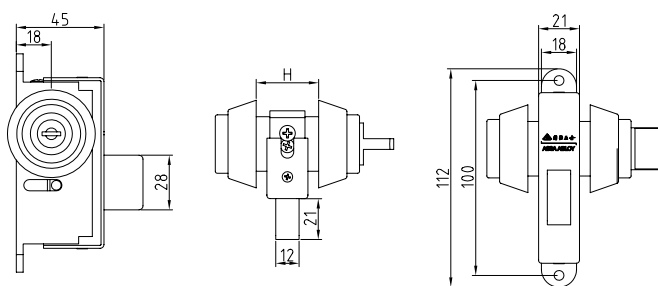

Lock for Profile Door

Material: Zinc Alloy/Aluminium
Door Thickness: 45mm
Finishing: Aluminum Oxidation

Item No.	Profile Thickness
MS405	45-48mm

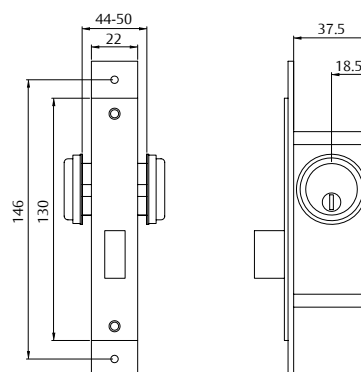




Middle Lock for Profile Door

Material: Zinc Alloy/Stainless Steel
Finishing: Brushed

Item No.	Profile Thickness
MS406	40-55mm
MS407	55-65mm

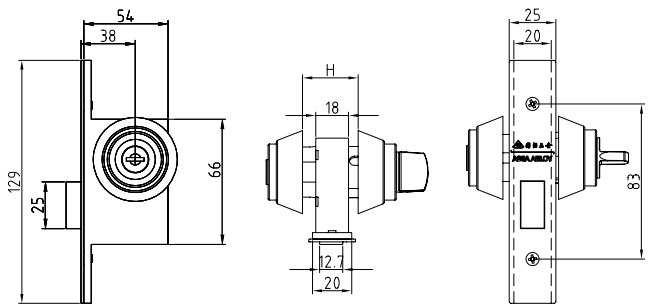


Middle Lock for Profile Door

Material: Zinc Alloy/Aluminium
Surface: Aluminum Oxidation

Item No.	Profile Thickness
MS410	≥20

Choose the suitable cylinder according to the door sash thickness

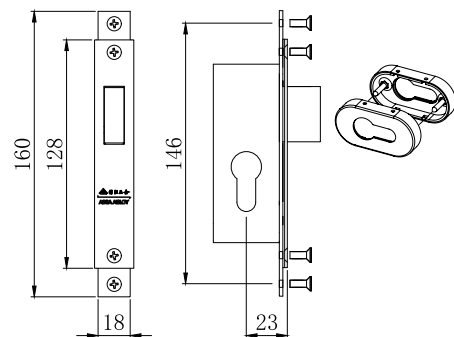


MS101

Glass Door Lock

Material: Stainless Steel

Door Thickness: 10-12mm glass door

Finishing: Brushed(Mirror,Titanium ect.can be customized)

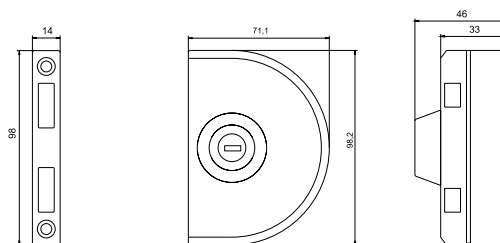

93


MS102

Glass Door Lock

Material: Stainless Steel

Door Thickness: 10-12mm glass door

Finishing: Stain(Mirror,Titanium ect.can be customized)

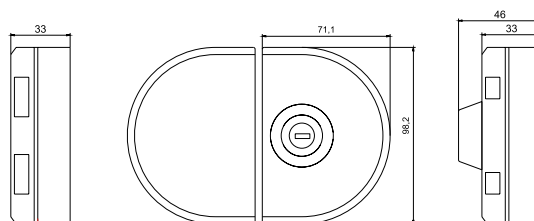


MS103

Glass Door Lock

Material: Stainless Steel

Door Thickness: 10-12mm glass door

Finishing: Brushed(Mirror,Titanium ect.can be customized)

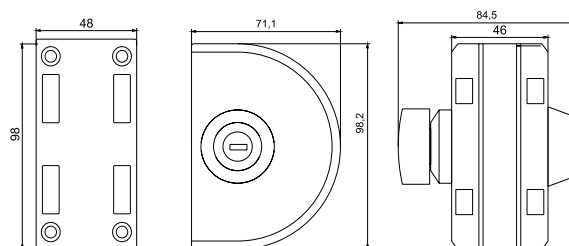


MS104

Glass Door Lock

Material: Stainless Steel

Door Thickness: 10-12mm glass door

Finishing: Brushed(Mirror,Titanium ect.can be customized)

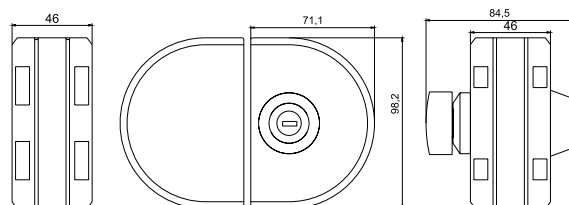


MS301

Glass Door Lock

Material: Stainless Steel

Door Thickness: 10-12mm glass door

Finishing: Brushed(Mirror,Titanium ect.can be customized)

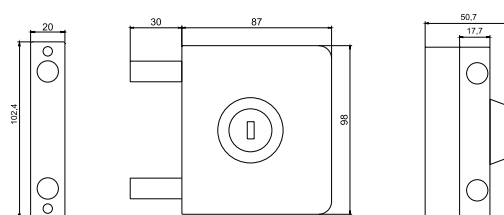

95


MS302

Glass Door Lock

Material: Stainless Steel

Door Thickness: 10-12mm glass door

Finishing: Brushed(Mirror,Titanium ect.can be customized)

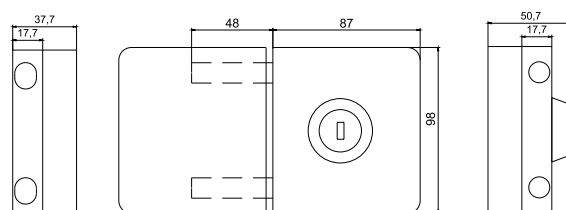


MS303

Glass Door Lock

Material: Stainless Steel

Door Thickness: 10-12mm glass door

Finishing: Stain(Mirror,Titanium ect.can be customized)

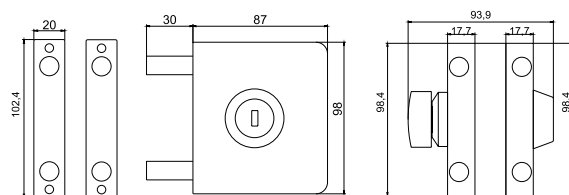


MS304

Glass Door Lock

Material: Stainless Steel

Door Thickness: 10-12mm glass door

Finishing: Brushed(Mirror,Titanium ect.can be customized)

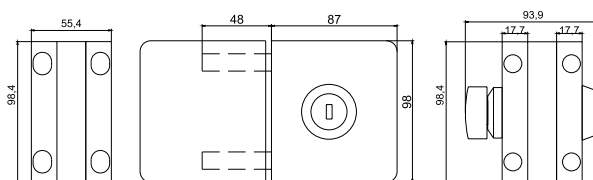


MS501

Glass Door Shoot Bolt

Material: Stainless Steel

Door Thickness: 10-12mm glass door

Finishing: Brushed

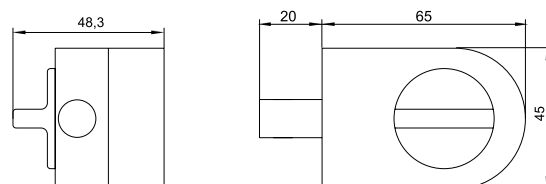

97


MS502

Glass Door Shoot Bolt


Material: Stainless Steel

Door Thickness: 10-12mm glass door

Finishing: Brushed

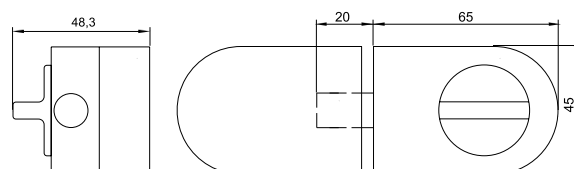


**STAINLESS
STEEL HINGE
SERIES**

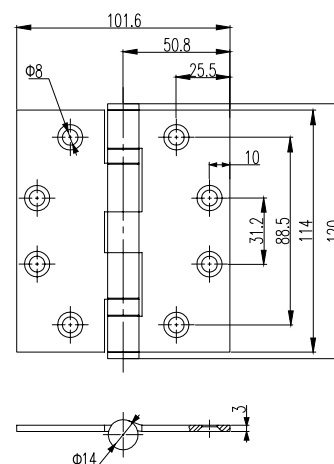


Item No.	Material	Size	Finishing
4.5X4X3-2BB-ZZA	304	114 × 101.6 × 3	Brushed
4.5X4X3-2BB-ZZB	201	114 × 101.6 × 3	Brushed

Note: B stands for ball bearing,Z stands for right angle,A stands for material SS304,B stands for material SS201.

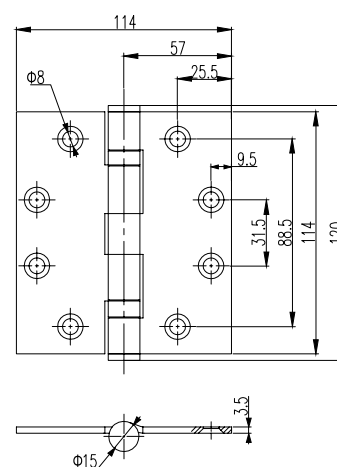


Item No.	Material	Size	Finishing
4.5 × 4.5 × 3.5-2BB-ZZA	304	114 × 114 × 3.5	Brushed
4.5 × 4.5 × 3.5-2BB-ZZB	201	114 × 114 × 3.5	Brushed


Note: B stands for ball bearing,Z stands for right angle,A stands for material SS304,B stands for material SS201.

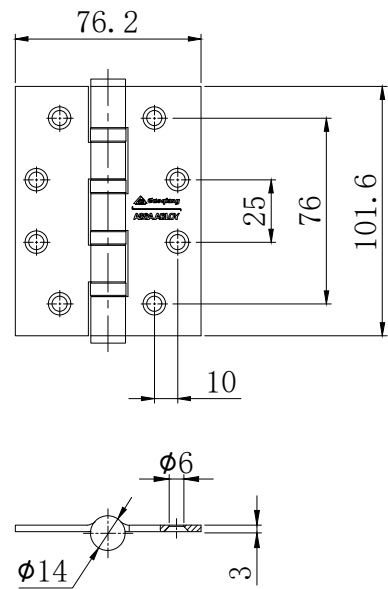


Item No.	Material	Size	Finishing
4 × 3 × 3-4BB-ZZA	304	99 × 76.6 × 3	Brushed/Mirror/PVD golden/Black

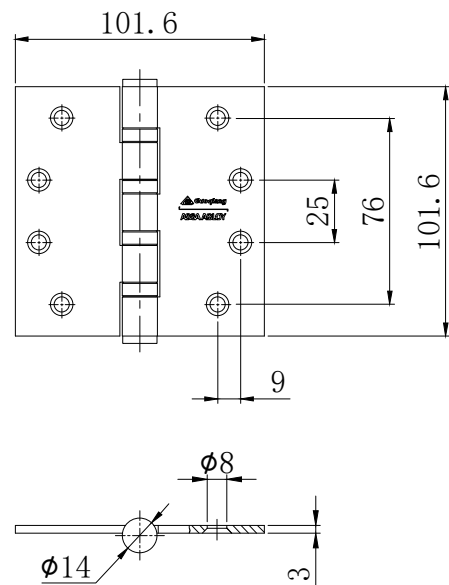


Item No.	Material	Size	Finishing
4 × 4 × 3-4BB-ZZA	304	101.6 × 101.6 × 3	Brushed/Mirror/PVD golden/Black

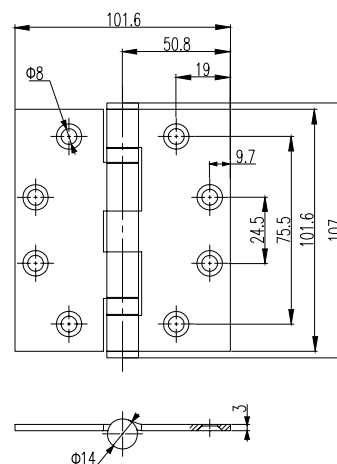


Note: B stands for ball bearing,Z stands for right angle,A stands for material SS304,B stands for material SS201.

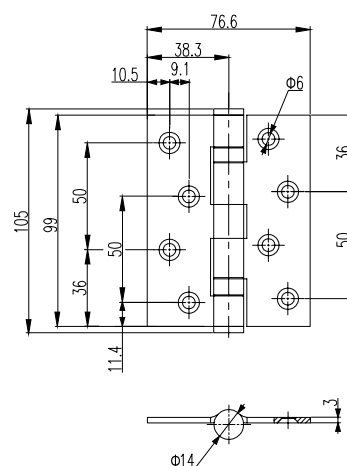


Note: B stands for ball bearing,Z stands for right angle,A stands for material SS304,B stands for material SS201.

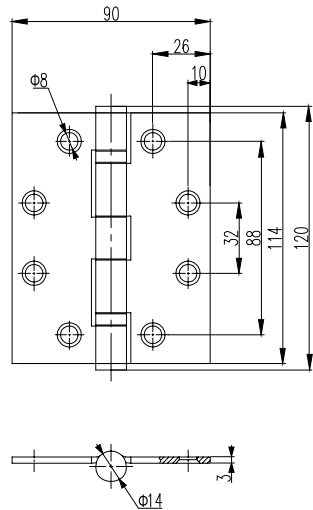

Item No.	Material	Size	Finishing
4.5×3.5×3-2BB-ZZB	201	114×90×3	Brushed
Note: B stands for ball bearing,Z stands for right angle,A stands for material SS304,B stands for material SS201.			

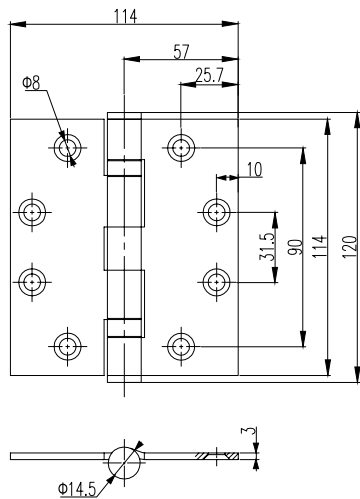

Item No.	Material	Size	Finishing
4.5×4.5×3-2BB-ZZA	304	114×114×3	Brushed
Note: B stands for ball bearing,Z stands for right angle,A stands for material SS304,B stands for material SS201.			

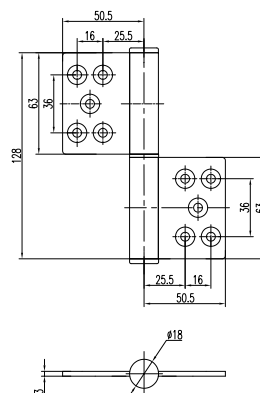


Item No.	Material	Size	Finishing	Note
5 × 3G	304	128 × 101 × 3	Brushed	Steel door
5 × 3M	304	128 × 101 × 3	Brushed	wooden door




MJ12321100


Material: Aluminium
Finishing: painted

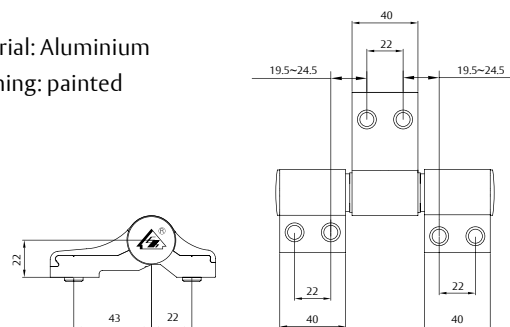

103


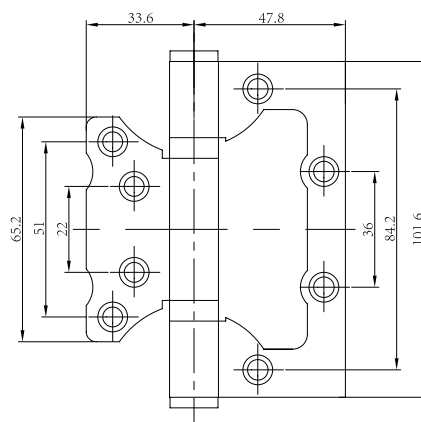


Item No.	Material	Size	Finishing
4 × 3 × 3-2BB-ZZA4	304	101.6 × 81.4 × 3	Brushed
Note: B stands for ball bearing,Z stands for right angle,A stands for material SS304			


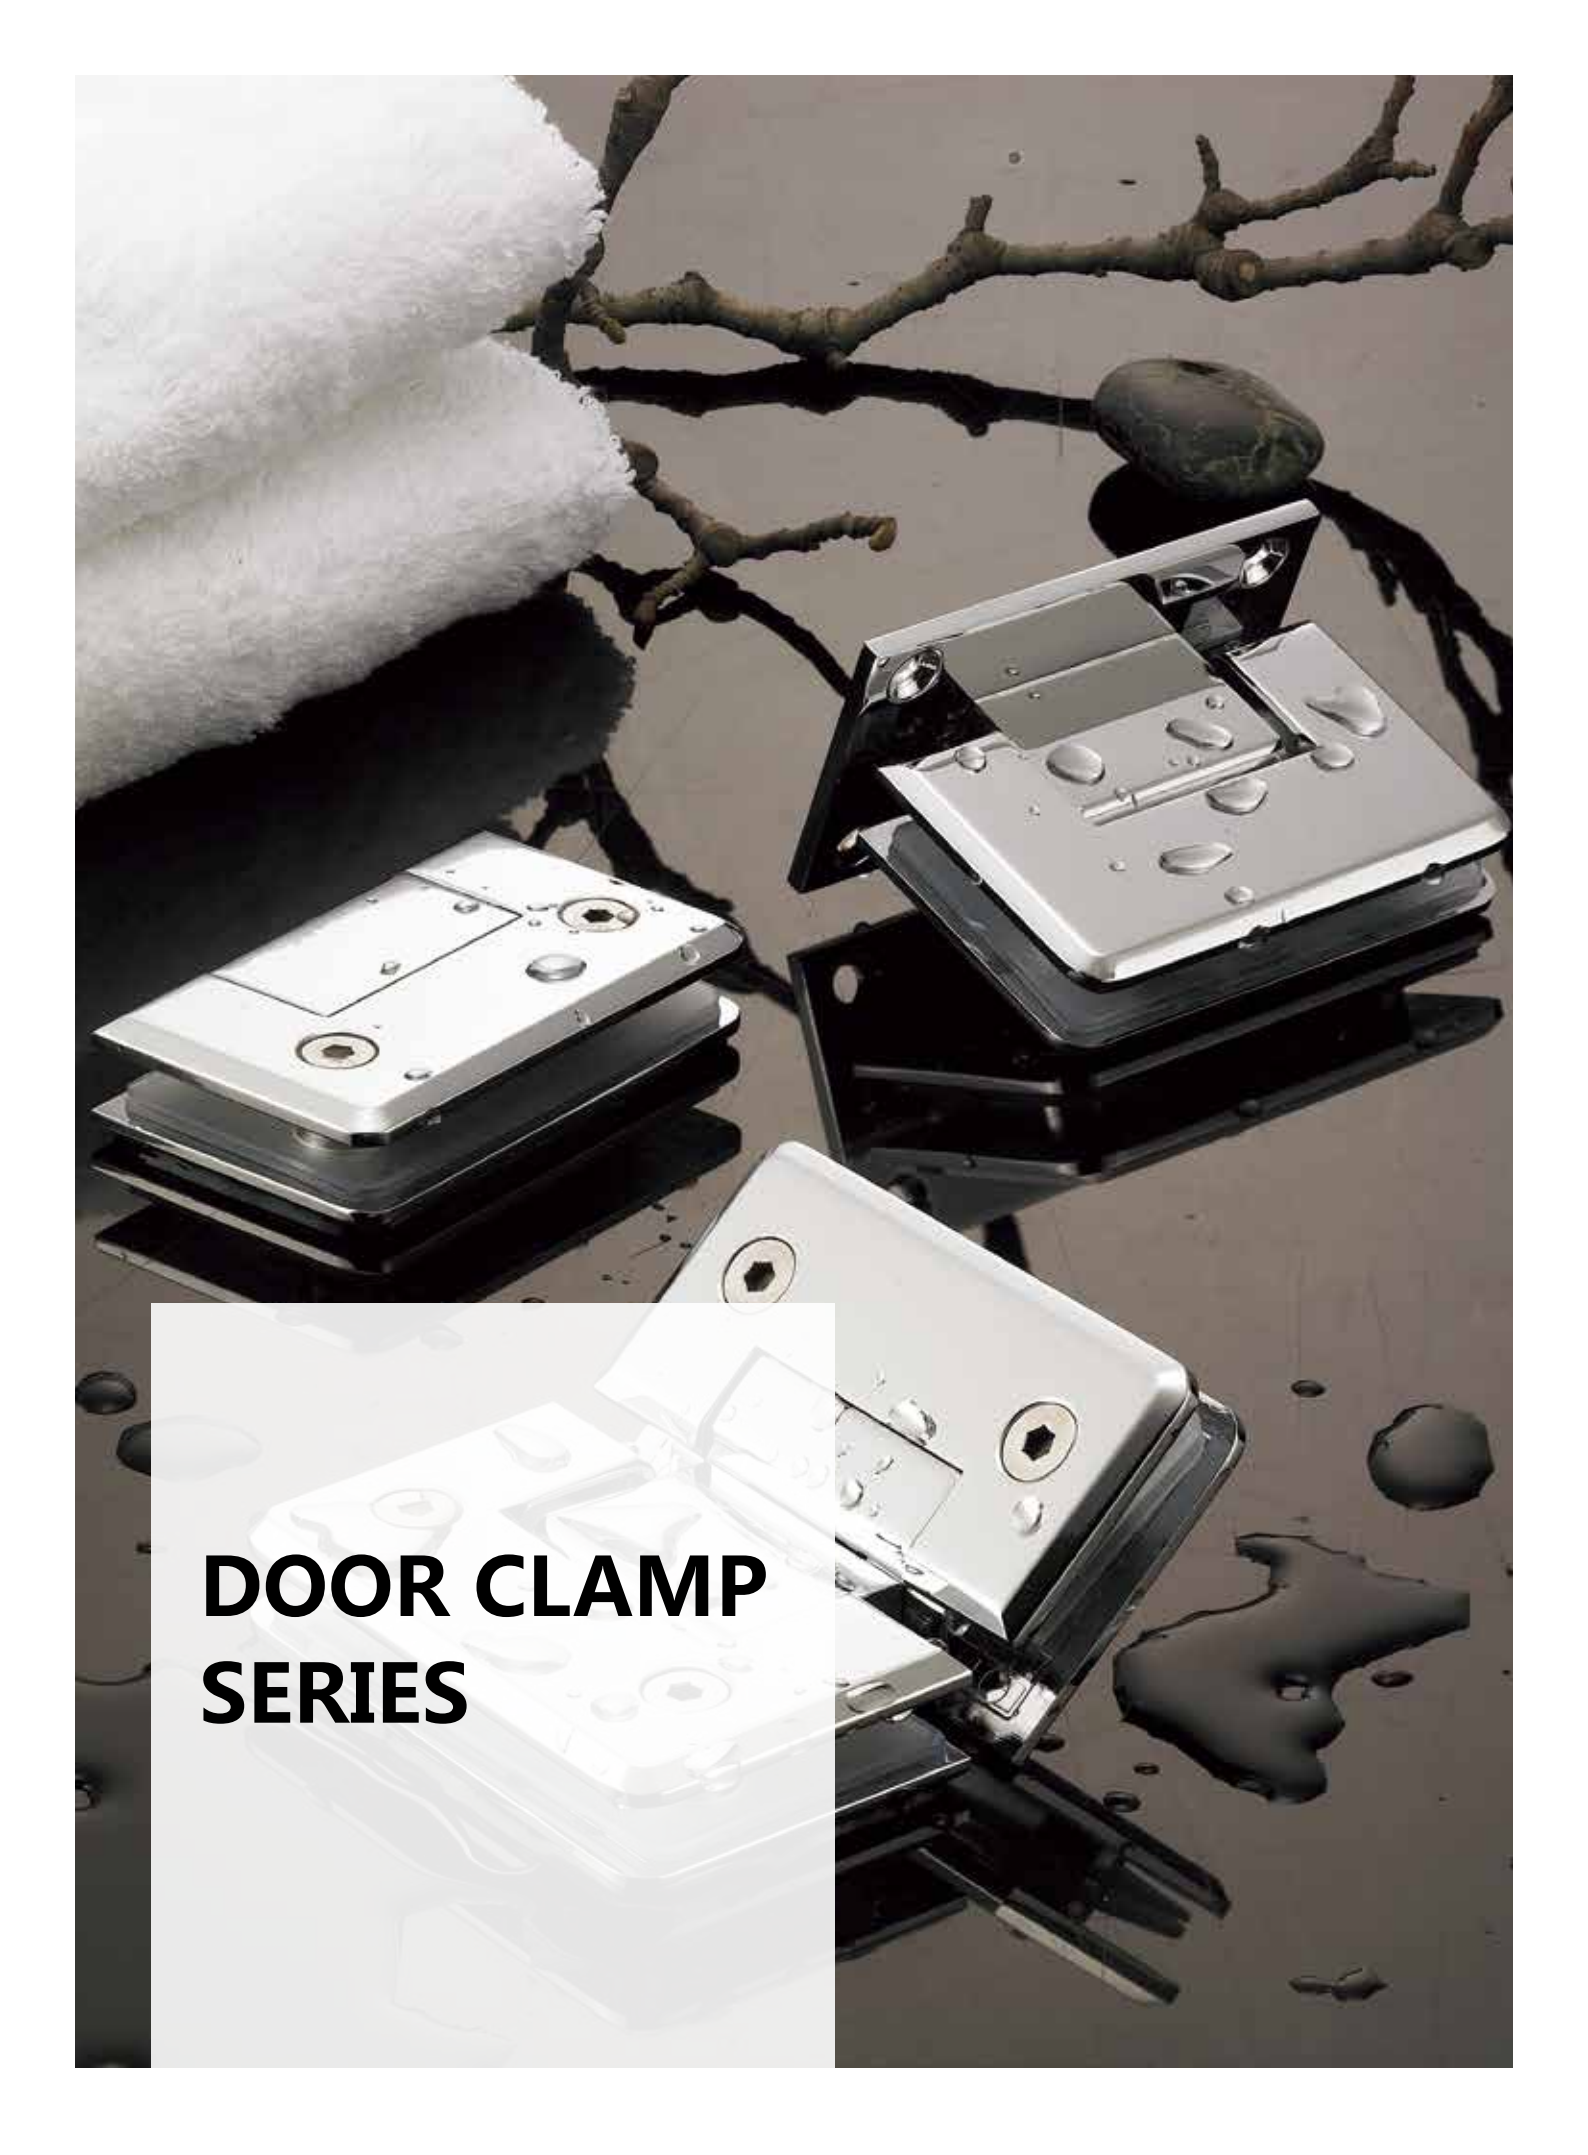


DOOR CLAMP SERIES



INSTALLATION EXAMPLES

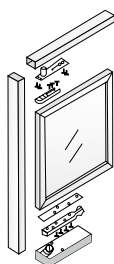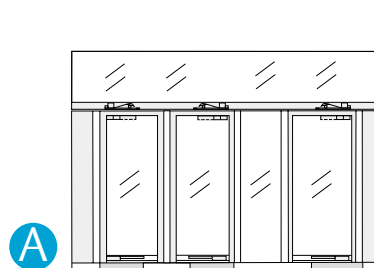



Frame door in frame ceiling

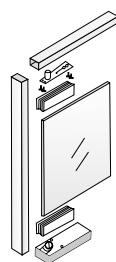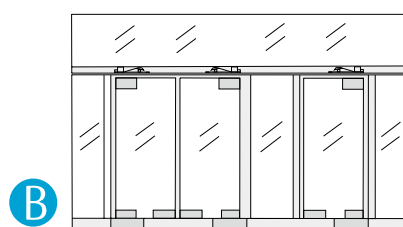

Frameless glass door in frame ceiling

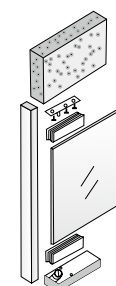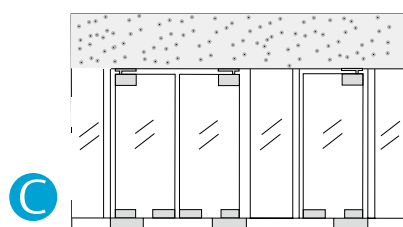

Frameless glass door in frame cement ceiling

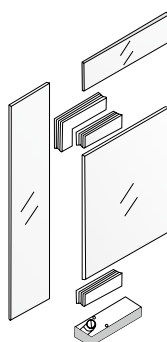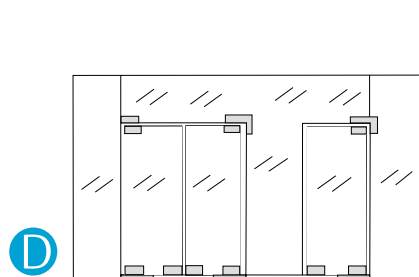

Frameless glass door in frameless glass wall

Precision Casting Door Clamps

Main Material: Stainless steel
Finishing: Satin

Lower clamp



Upper clamp



Item No.	Material	Door Thickness
MJ1201	Aluminium alloy+Stainless steel	10-12mm
MJ1511	Aluminium alloy+Stainless steel	15mm
MJ1901	Stainless steel	15-19mm

Item No.	Material	Door Thickness
MJ1202	Aluminium alloy+Stainless steel	10-12mm
MJ1512	Aluminium alloy+Stainless steel	15mm
MJ1902	Stainless steel	15-19mm

Top clamp



Bending clamp



Item No.	Material	Door Thickness
MJ1203	Aluminium alloy+Stainless steel	10-12mm
MJ1513	Aluminium alloy+Stainless steel	15mm
MJ1903	Stainless steel	15-19mm

Item No.	Material	Door Thickness
MJ1204	Aluminium alloy+Stainless steel	10-12mm
MJ1514	Aluminium alloy+Stainless steel	15mm
MJ1904	Stainless steel	15-19mm

Glass Door Clamps

Main Material: Aluminium alloy, Stainless steel
Finishing: Satin

Clamp lock



Item No.	Material	Door Thickness
MJ1205	Aluminium alloy+Stainless steel	10-12mm
MJ1515	Aluminium alloy+Stainless steel	15mm
MJ1905	Stainless steel	15-19mm

107

MJ1206 Top clamp



MJ1207 Top clamp



Glass Door Clamps

Door thickness: 10-12mm

Main Material: Aluminium/Stainless steel

Finishing: Satin

MJ1208 T clamp



MJ1209 F clamp right




MJ1210 F clamp left



Clamps for bathroom


Applicable Door Thickness: 10-12mm
Applicable Door Width: 800-1200mm
Applicable Door weight: ≤50kg
Main Material: Stainless steel
Finishing: Polished/Satin

MY808

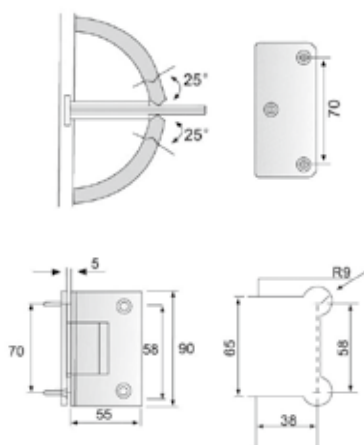

109


MY809

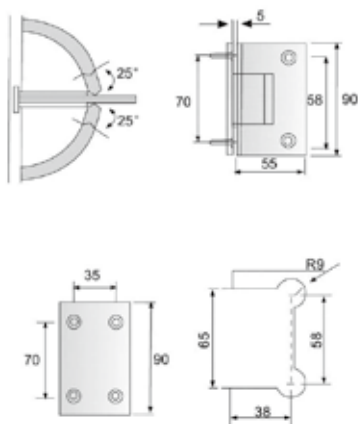


Glass Door Clamps

Applicable Door Thickness: 10-12mm
 Applicable Door Width: 800-1200mm
 Applicable Door weight: ≤50kg
 Main Material: Stainless steel/brass
 Finishing: Polished/Satin


MY810

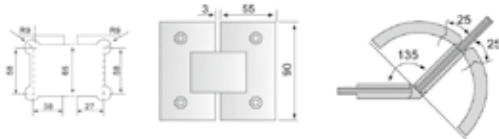

MY811



MY812

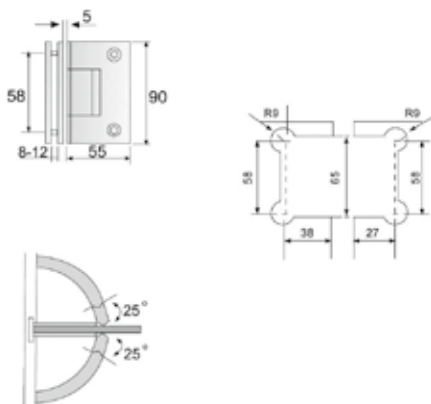


HARDWARE SERIES

016
871

PRODUCTION HEADER CARD			
PART No*	5340-1		
DESC	KEY Plate	TOTAL QTY	1
QTY	532	No* OF CONT	
PART No* TO BECOME	5340-1-A9		
DELIVER TO	LB Parkes	(IN PLATING)	
FORWARD TO	PROFIT CENTRE	(IN PLATING) CELL LOCK	
DATE	010699	01040	
SIGN	4/7/14	Mandy	
INTERMEDIATE STAMP	INSPECTION ST		


Concealed Door Shootbolt FDCX0116

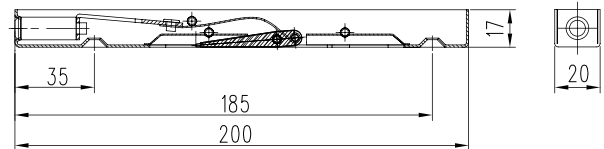

Details:

- 1, Stainless steel with brushed surface.
- 2, Used for slave door sashes on double opened doors. Installed on the top or bottom.
- 3, Passed 90 min's fire resistance test from NFTC.


Concealed Door Shootbolt FDCX0214

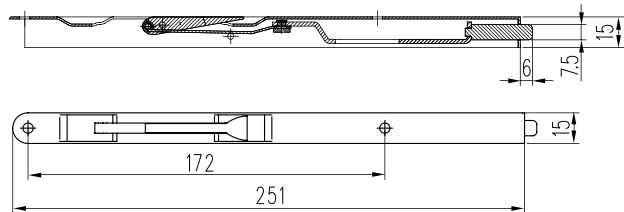

Details:

- 1, Stainless steel with brushed surface.
- 2, Used for slave door sashes on double opened doors. Installed on the top or bottom.
- 3, Passed 90 min's fire resistance test from NFTC.


Middle Shootbolt FDCX0320

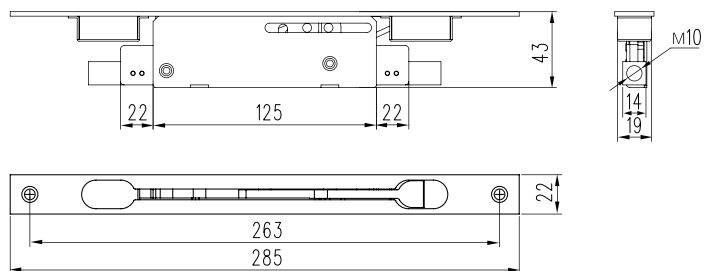

Details:

- 1, Stainless steel with brushed surface.
- 2, Used for slave door sashes on double opened doors. Installed on the middle.
- 3, Passed 90 min's fire resistance test from NFTC.


Concealed Door Shootbolt FDCX0425

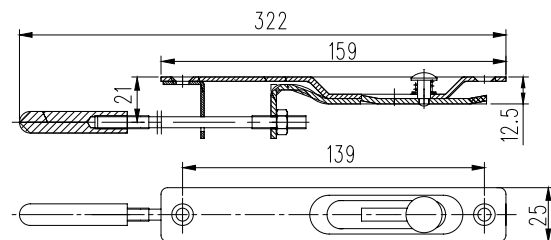

Details:

- 1, Galvanized carbon steel.
- 2, Used for slave door sashes on double opened doors. Installed on the top and bottom.
- 3, Passed 90 min's fire resistance test from NFTC.


Concealed Door Shootbolt FDCX0518

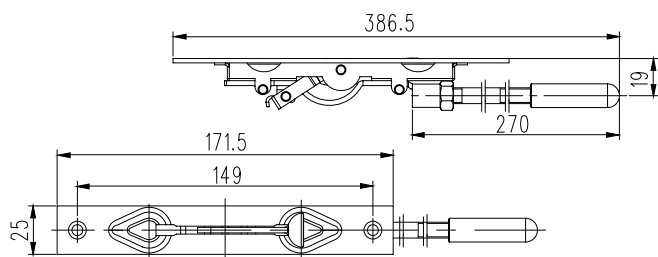

Details:


- 1, Stainless steel with brushed surface.
- 2, Used for slave door sashes on double opened doors. Installed on the top and bottom.
- 3, Passed 90 min's fire resistance test from NFTC.

Shootbolt FDLX0644.1

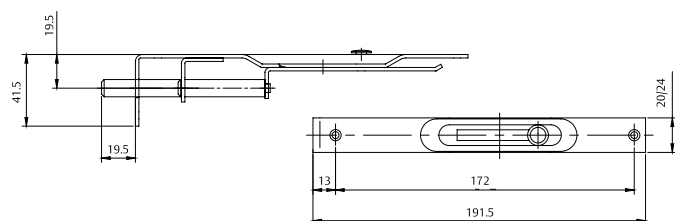


FDCX0644.1

Material: Stainless Steel
Surface Treatment: Brushed

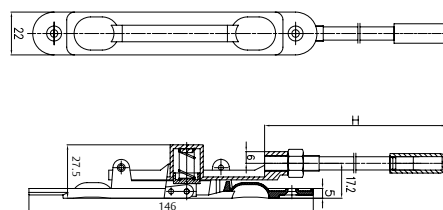


Item Code	Shootbolt Length H
LDCX0116.1	230mm
LDCX0116.3	400mm

A white plastic door latch assembly, likely for a childproof door. It features a long, white plastic body with a circular hole at one end and a smaller hole at the other. A metal rod extends from the body, ending in a black, cylindrical handle. The assembly is shown against a plain white background.

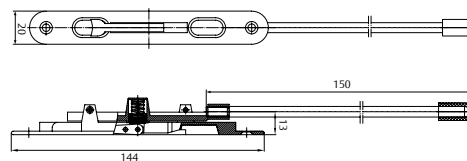

The image shows two views of a metal component. The left view shows a rectangular metal block with a large circular hole on the left side. A black handle is attached to the top, and a red button is visible on the right side. The right view shows the same component from a different angle, highlighting the black handle and the circular hole.

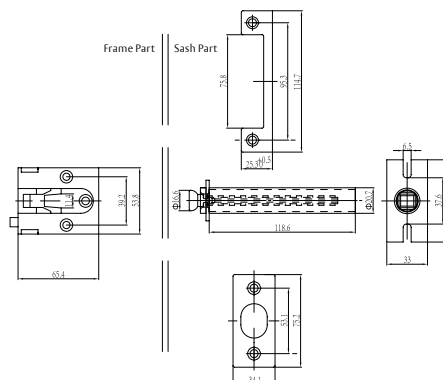


ASSA ABLOY Guoqiang(Shandong) Hardware Technology Co., Ltd

Concealed Pull Ring 62-LH01




- Details:
- 1, Stainless Steel with brushed surface
 - 2, Applicable for stairwell doors

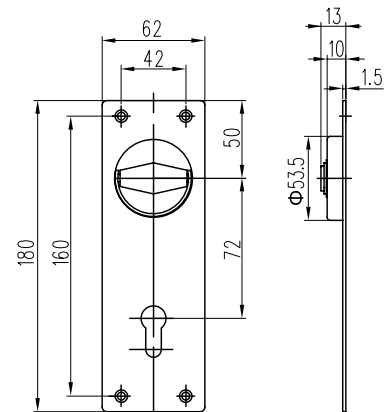

Pull and Push Plates 100-TLB01




- Details:
- 1, Stainless Steel with brushed surface
 - 2, Applicable for self-closing fire doors or bathroom doors.

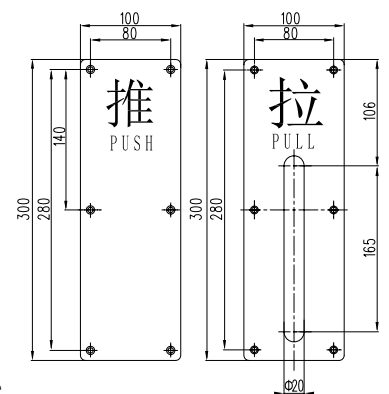

115


Door Stopper FMFA01

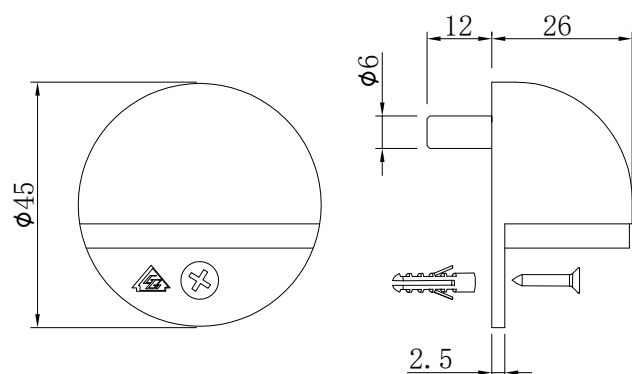

Door Coordinator



Item No.	FSWQ01	FSWQ01.1	FSWQ01.2
Material	201	Q235	304

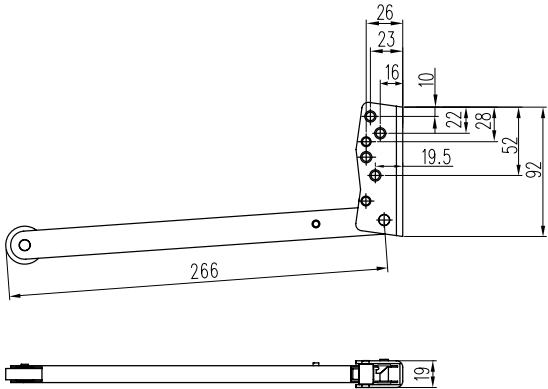


- Details:
- 1, Used for double door openings to ensure the right sequence of inactive and active door leaf's closing.
 - 2, No left or right handed
 - 3, Passed 90 min's fire resistance test from NFTC.

Concealed Door Coordinator




Length	Item Code	Sash Width
800	FSWQ02800	800-1100
900	FSWQ02900	900-1200
1000	FSWQ021000	1000-1300
1100	FSWQ021100	1100-1400
1200	FSWQ021200	1200-1500
1300	FSWQ021300	1300-1600
1400	FSWQ021400	1400-1700

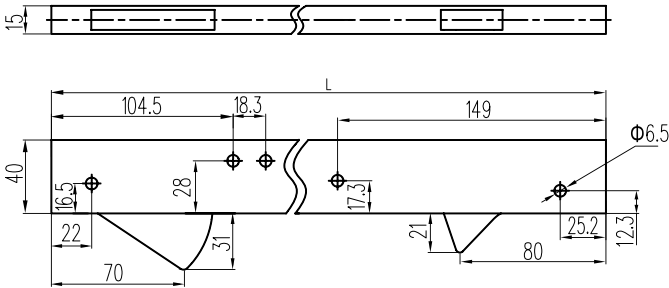

- Details:
- 1, Stainless Steel 304 with brushed surface
 - 2, Used for double door openings to ensure the right sequence of inactive and active door leaf's closing.
 - 3, Concealed installation which is more aesthetical
 - 4, No left or right handed
 - 5, Passed 90 min's fire resistance test from NFTC.

Invisible Pull Ring LH02

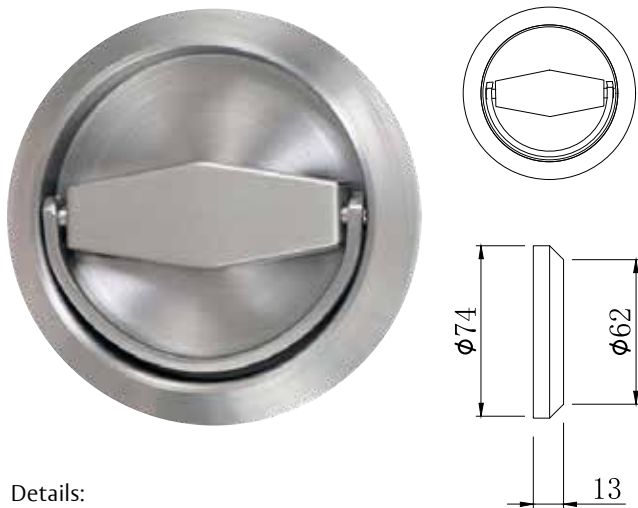

Details:

- 1, Stainless Steel with brushed surface
- 2, Applicable for stairwell doors

Dust Proof Plug FCXZ02




Details:

- 1, Stainless Steel with brushed surface
- 2, Used with concealed door shootbolts to keep away from dust

117


Magnetic Door Catch FMX05

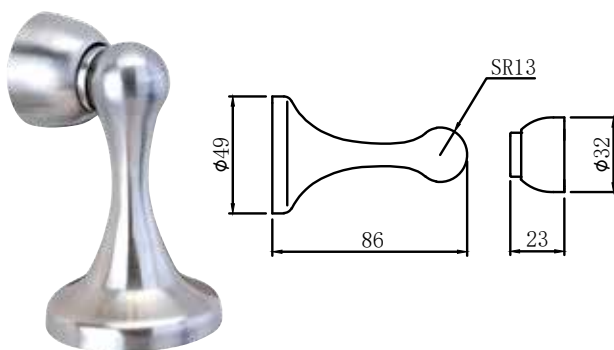

Details:

- 1, Stainless Steel 304
- 2, Brushed surface or Black color
- 3, could be installed on floor or wall



Magnetic Door Catch FMX06

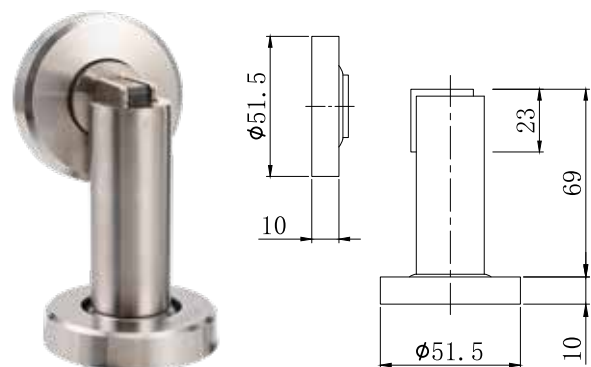

Details:

- 1, Stainless Steel 304
- 2, Brushed surface or PVD Golden or black color

Floor Catch FDX02

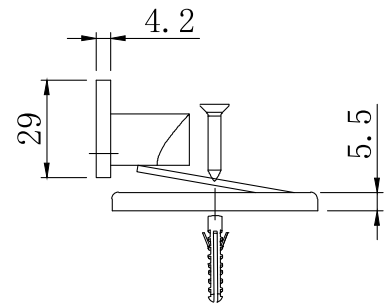
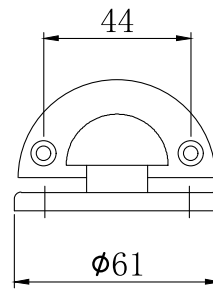


Details:

- 1, Stainless Steel 304
- 2, Brushed surface or golden color

118

Door Pull Handle YMKS01

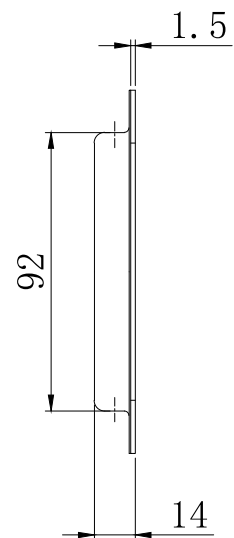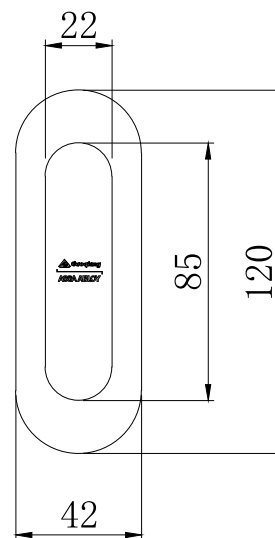

Details:

- 1, Stainless Steel 304
- 2, Brushed surface or PVD golden color or black color

**FAUCET
SHOWER
SERIES**



GLT04A



GLT04B



GYQC-01



GYQA-01



GYQB-01



GLT01A



GLT01B



GLT02A



GLT02B



GLTC01



GLT03A



GLT03B



GHS201



GHS401



GHS301



FLOOR DRAIN SERIES



GDH01A

- ☆ 100*100MM
- ☆ 57 bronze base 3.5 mm
- ☆ Stainless Steel strainer
- ☆ Surface chrome plating
- ☆ Anti-overflow copper core bounce



GDH01B

- ☆ 100*100MM
- ☆ 57 bronze base 3.5 mm
- ☆ Stainless Steel strainer
- ☆ Surface chrome plating
- ☆ Anti-overflow copper core bounce



GDH02A

- ☆ 100*100MM
- ☆ 57 bronze base 3.5 mm
- ☆ Stainless Steel strainer
- ☆ Surface chrome plating
- ☆ Anti-overflow copper core bounce



GDH03A

- ☆ 100*100MM
- ☆ 57 bronze base 3.5 mm
- ☆ Stainless Steel strainer
- ☆ Surface chrome plating
- ☆ Anti-overflow copper core bounce



GDH03B

- ☆ 100*100MM
- ☆ 57 bronze base 8.5 mm
- ☆ Stainless Steel strainer
- ☆ Surface chrome plating
- ☆ Anti-overflow copper core bounce



GDH04A

- ☆ 100*100*4MM
- ☆ Floor Drain 57 bronze
- ☆ Floor Drain Cap 57 copper
- ☆ Stainless Steel strainer
- ☆ Anti-overflow function
- ☆ Surface chrome plating



GDS01A

- ☆ SUS304 subject
- ☆ 100*100*3MM
- ☆ Anti-overflow copper rebound seal
- ☆ Surface drawing



GDS01B

- ☆ SUS304 subject
- ☆ 100*100*3MM
- ☆ Anti-overflow copper rebound seal
- ☆ Surface drawing



GDS02A

- ☆ SUS304 subject
- ☆ 100*100*2MM
- ☆ Self-sealing water core with plastic
- ☆ Surface drawing



GDS03A

- ☆ SUS304 subject
- ☆ 100*100*3MM
- ☆ Stainless steel self-sealing water core
- ☆ Surface drawing



GDS03B

- ☆ SUS304 subject
- ☆ 100*100*3MM
- ☆ Stainless steel self-sealing water core
- ☆ Surface drawing



GDH05A

- ☆ 100*100MM
- ☆ 57 bronze base 18 mm
- ☆ Stainless Steel strainer
- ☆ Surface chrome plating
- ☆ Anti-overflow copper core bounce



GDH06C

- ☆ 200*83*48MM
- ☆ 57 bronze base 11mm
- ☆ Spring type dehydrating
- ☆ Anti-overflow copper core bounce
- ☆ 201 Stainless Steel strainer
- ☆ Surface chrome plating



GDH06D

- ☆ 300*83*48MM
- ☆ 57 bronze base 11mm
- ☆ Spring type dehydrating
- ☆ Anti-overflow copper core bounce
- ☆ Stainless Steel strainer
- ☆ Surface chrome plating



GDS04C

- ☆ SUS304 subject
- ☆ 300*68*1.5MM
- ☆ Panel line thickness 3.0 mm
- ☆ Anti-overflow copper core bounce
- ☆ Surface drawing



GDS05C

- ☆ SUS304 subject
- ☆ 300*80*1MM
- ☆ 1mm The thickness of the panel is 1mm
- ☆ Anti-overflow copper rebound seal
- ☆ Surface drawing



GDS05D

- ☆ SUS304 subject
- ☆ 600*80*1MM
- ☆ 1mm The thickness of the panel is 1mm
- ☆ Anti-overflow copper rebound seal
- ☆ Surface drawing



PJ1

- ☆ 45-degree plastic elbow USB
- ☆ Material: PVC



PJ2

- ☆ 45-degree plastic elbow USB
- ☆ Material: PVC

A modern bathroom vanity featuring a white countertop with two sinks and chrome faucets. Above the countertop are four white cabinets with dark frames. Below the countertop are dark drawers with a horizontal silver handle. To the left, a dark vertical cabinet is partially visible. To the right, a towel rack holds a white towel. A dark jacket is draped over the edge of the vanity. A light-colored rug is on the floor.

HARDWARE SERIES OF PENDANT



GJ06

Tissue holder
Material: SUS304
Finish: Brushed



GJ04A-1

Tissue holder
Material: SUS304
Finish: Brushed



GJ01A

Clothes hook
Material: SUS304
Finish: Brushed



GJ05D-1

Toilet brush holder
Material: SUS304
Finish: Brushed



GJ05C-1

Single cup holder
Material: SUS304
Finish: Brushed



GJ05A-1

Soap holder
Material: SUS304
Finish: Brushed



GJ05B-1

Soap dispenser holder
Material: SUS304
Finish: Brushed



GJ09

Clothes Line
Material: SUS304
Finish: Brushed



GJ03A-1

Single towel bar
Material: SUS304
Finish: Brushed



GJ03B-1

Double towel bar
Material: SUS304
Finish: Brushed



GJ03C-1

Towel rack
Material: SUS304
Finish: Brushed



GJ01D

Clothes hook
Material: SUS304
Finish: Brushed



GJ10

Mirror
Material: SUS304
Finish: Brushed



GJ01

Single towel bar
Material: SUS304
Finish: Brushed



GJ04B

Tissue holder
Material: SUS304
Finish: Brushed



GJ02

Towel ring
Material: SUS304
Finish: Brushed



GJ04A

Tissue holder
Material: SUS304
Finish: Brushed



GJ05C

Single cup holder
Material: SUS304
Finish: Brushed



GJ05A

Soap holder
Material: SUS304
Finish: Brushed



GJ05B

Soap dispenser holder
Material: SUS304
Finish: Brushed



GJ05D

Toilet brush holder
Material: SUS304
Finish: Brushed



GJ03A

Single towel bar
Material: SUS304
Finish: Brushed



GJ03B

Double towel bar
Material: SUS304
Finish: Brushed






GJ03C

Towel rack
Material: SUS304
Finish: Brushed

Project Cases



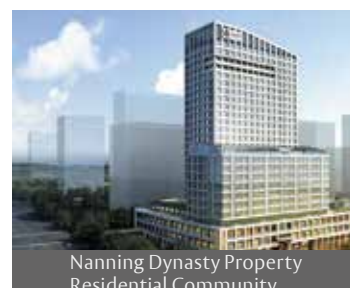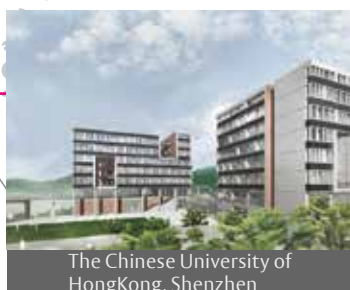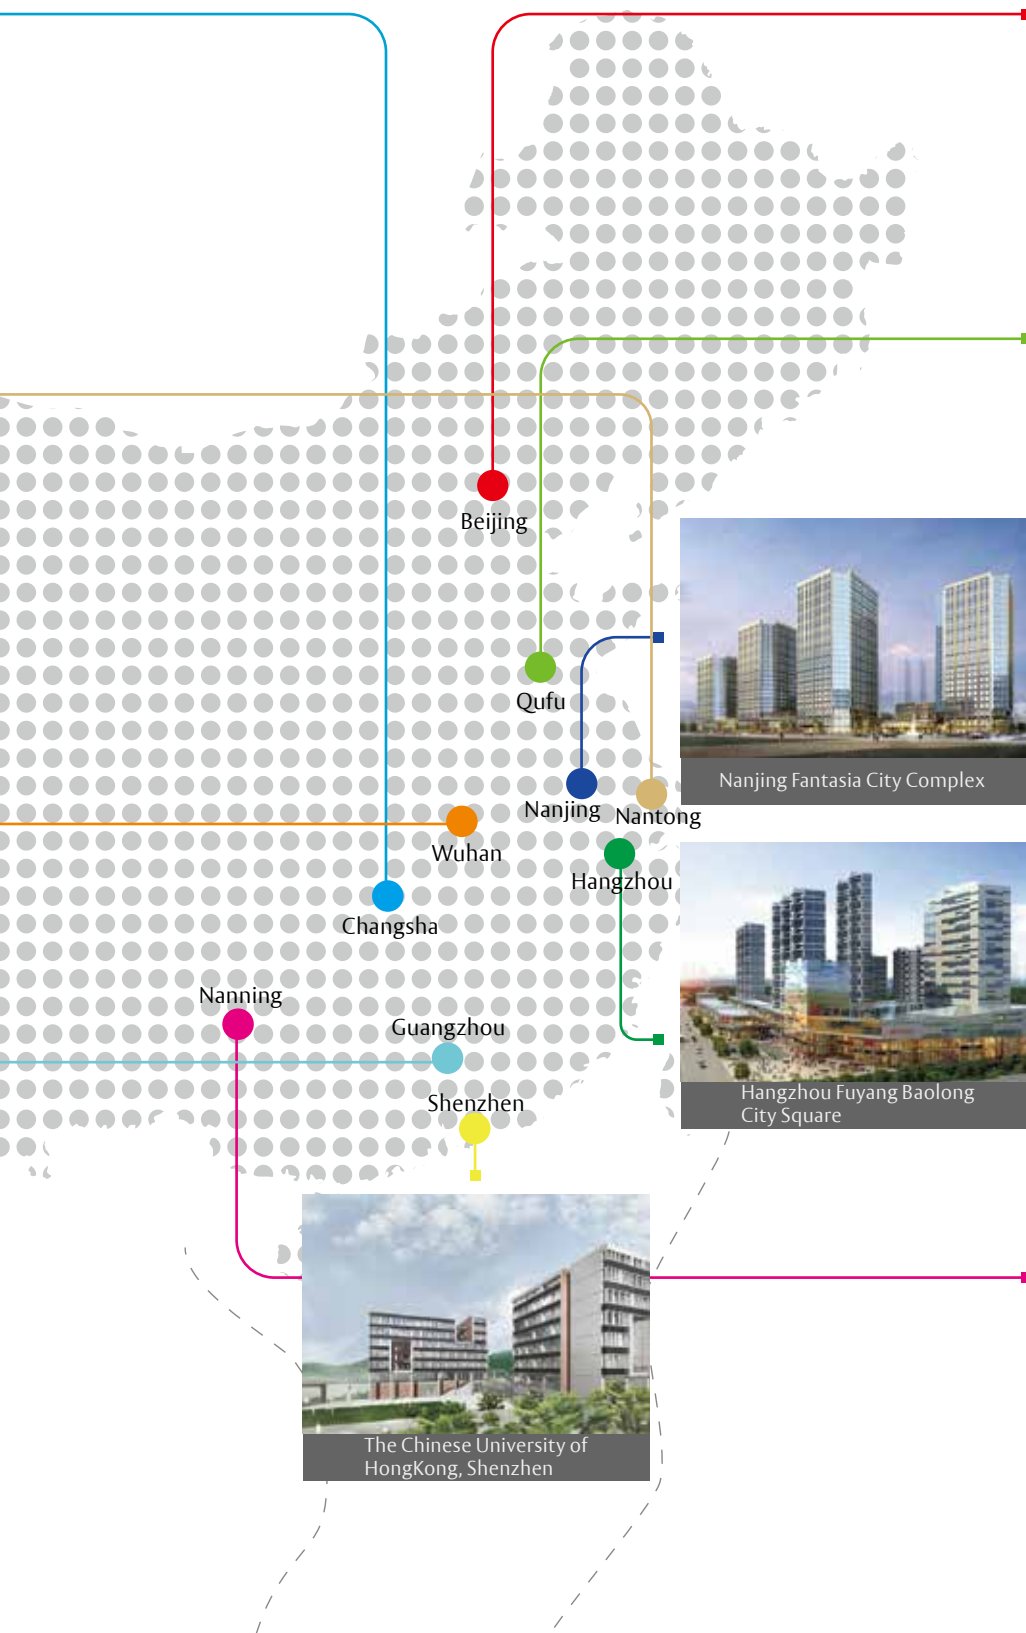

The ASSA ABLOY Group is the global leader in access solutions.
Every day we help people feel safe, secure and experience a more
open world.

ASSA ABLOY



ASSA ABLOY Guoqiang (Shandong) Hardware Technology CO., Ltd

Add: 518 Tingjin Road, Leling,
Shandong Prov, China
Zip code: 253600
Tel: 0086-534-2119510
Fax: 0086-534-2119025
Http: www.guoqiang.cn
www.assaabloy.cn